

**DESCRIPTION:** 2mm HEADER STRIP STRAIGHT

**MATERIALS:**

HOUSING: NYLON 6T- UL 94V-0  
 COLOR: BLACK  
 CONTACTS: COPPER ALLOY  
 PLATING: GOLD FLASH ENTIRE CONTACT  
 RoHS COMPLIANT

CURRENT RATING: 1 AMP  
 INSULATOR RESISTANCE: 5000 MEGOHMS MIN.  
 DIELECTRIC WITHSTANDING: 500V AC  
 OPERATING TEMP: -40°C TO +105°C  
 MAX PROCESSING TEMP: 260°C FOR 10 SECONDS

**2763 YY 02RP2**


SERIES \_\_\_\_\_  
 2763 = SINGLE ROW


POSITIONS \_\_\_\_\_  
 SINGLE - INCRMENTS OF 1  
 (01 TO 36)

TYPE \_\_\_\_\_  
 02 = RIGHT ANGLE

PLATING \_\_\_\_\_  
 P2 = GOLD FLASH

"L" = NO. OF PINS/ROW X .079 - .079

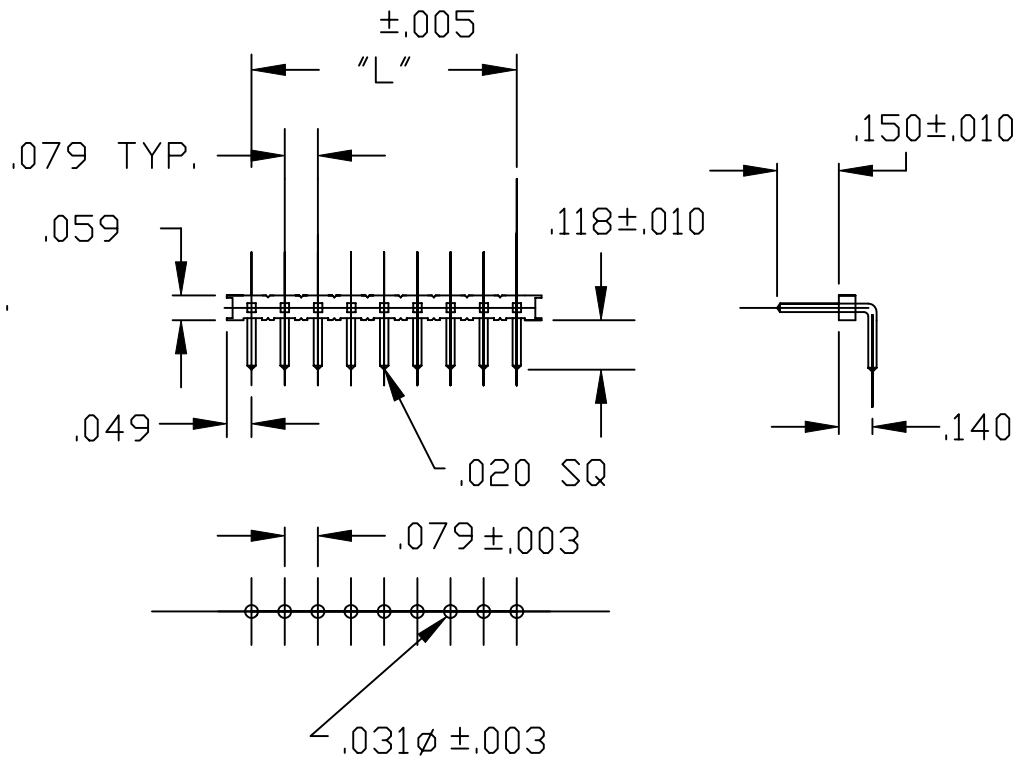

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: PAM JENKINS	DATE: 1-27-06
			CHECKED:	DATE:
<b>NorComp</b>		SCALE:	SHEET 1 OF 1	REV 2
		DWG NO. 2763YY02RP2		