

DESCRIPTION: 2mm CENTER RIGHT ANGLE HEADER





20 PIN SHOWN

ELECTRICAL:


- CURRENT RATING: 1 AMPS
- INSULATOR RESISTANCE: 5,000 MegOhms Min.
- DIELECTRIC WITHSTANDING: 500V AC
- OPERATING TEMPERATURE: -40° ~ +105° C
- MAX. PROCESS TEMPERATURE: 260°C FOR 10SEC.

MATERIAL:

- CONTACT: COPPER ALLOY
- INSULATION: NYLON-6T, UL 94V-0
- PLATING: GOLD FLASH ENTIRE CONTACT

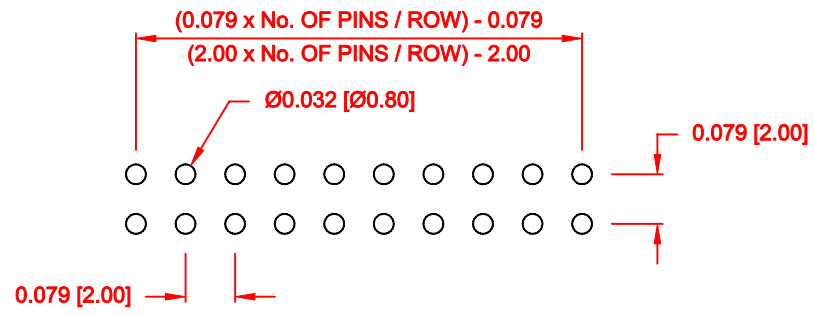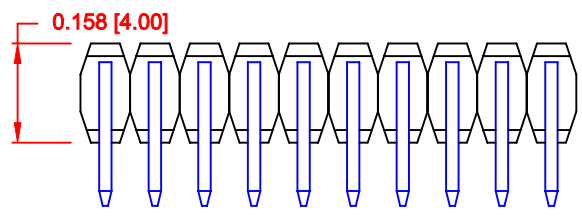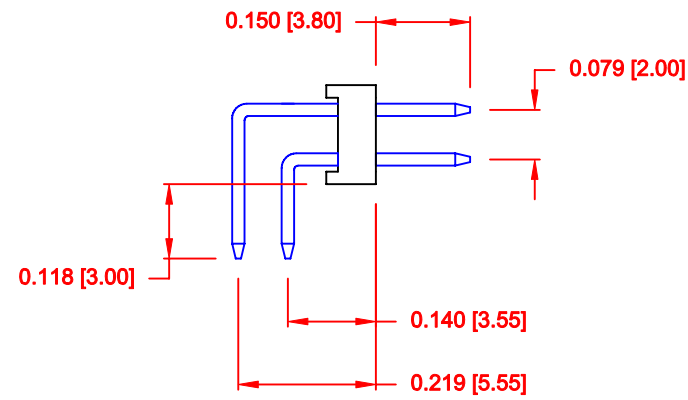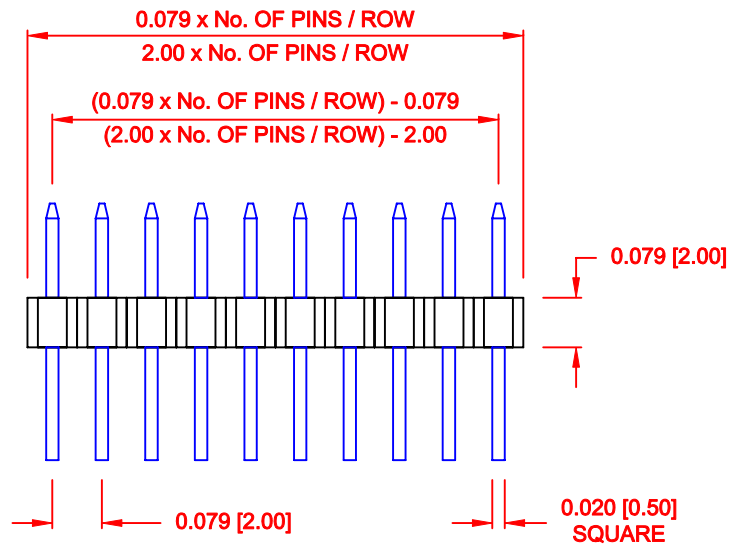

RECOMMENDED P.C. BOARD LAYOUT
 (ALL TOL. = 0.002)

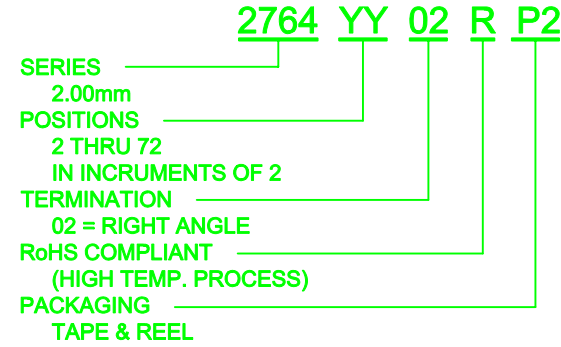

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: C. SMITH	DATE: 07-16-08
			CHECKED:	DATE:
NorComp	SCALE: 3 : 1	SHEET 1	OF 1	REV 3
	DWG NO. 2764YY02RP2			