



**Fig. 1**


- Series 335 and 435 single and double row PCB interconnects offer the lowest profile available .070".
- Series 364 and 464 single and double row PCB interconnects offer .085" profile above board.
- Series 335 and 435 use MM #3516 pins. See page 170 for details.
- Series 364 and 464 use MM #6458 pins. See page 171 for details.
- Insulators are high temp. thermoplastic.

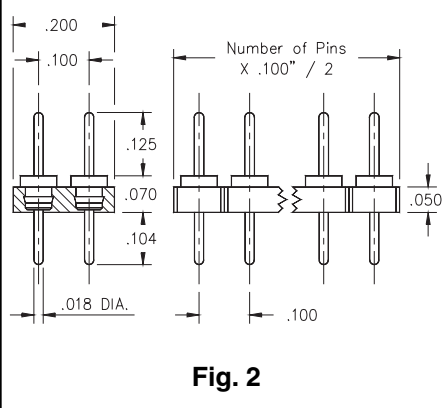

**Fig. 2**

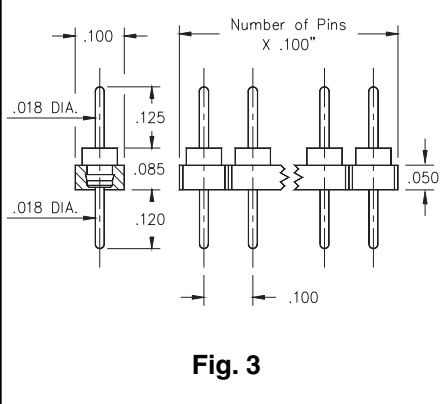

**Fig. 3**

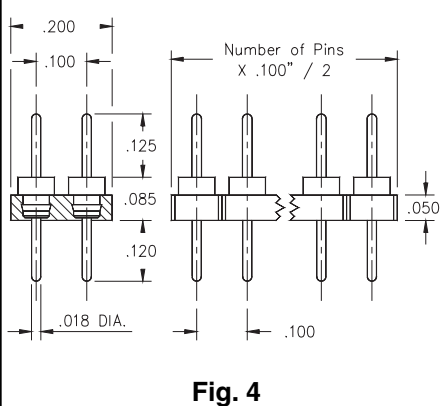

**Fig. 4**

**Ordering Information**

|               |   |                                 |
|---------------|---|---------------------------------|
| <b>Fig. 1</b> | <b>Single Row</b>                                 | <b>.070" Profile Pin Header</b> |
|               | 335-XX-1__-00-160000<br>Specify # of pins → 01-32 |                                 |
| <b>Fig. 2</b> | <b>Double Row</b>                                 | <b>.070" Profile Pin Header</b> |
|               | 435-XX-2__-00-160000<br>Specify # of pins → 02-72 |                                 |
| <b>Fig. 3</b> | <b>Single Row</b>                                 | <b>.085" Profile Pin Header</b> |
|               | 364-XX-1__-00-580000<br>Specify # of pins → 01-32 |                                 |
| <b>Fig. 4</b> | <b>Double Row</b>                                 | <b>.085" Profile Pin Header</b> |
|               | 464-XX-2__-00-580000<br>Specify # of pins → 02-72 |                                 |

For RoHS compliance select plating code.

**XX=Plating Code See Below**



|                          |           |             |           |  |
|--------------------------|-----------|-------------|-----------|--|
| SPECIFY PLATING CODE XX= | <b>10</b> | <b>90</b>   | <b>40</b> |  |
| Pin Plating              | 10μ" Au   | 200μ" Sn/Pb | 200μ" Sn  |  |