



ט

_,100 ±.003 2.54 ±.08 TYP N□N-ACCUMULATI∨E ø .109 2.77 .100 ±.003 2.54 ±.08 NOTE 8

RECOMMENDED HOLE PATTERN SCALE 10:1

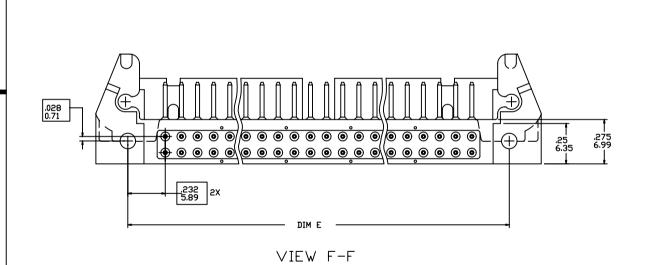


1 | 2

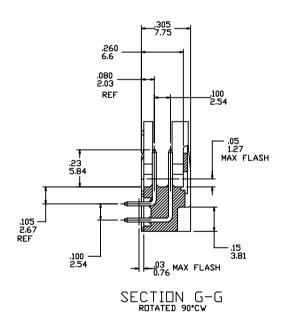



3


mat	'l. co	ode					erance erwise				l .	STON			F	SJ						
ltr	ecn	no	dr	date			.xx	±.01/	′.X±.	3						-					nect.c	om
AF					linec	ır 🗌	XXX±	.005	/.XX±	:.13	proje	ection	1	title	HE	. V D		\cap		1/15	-	
						.x	XXX±.	0020/	'.XXX:	±.051	4) +	=	ارد	, 	AU.		_ ~		YNIE		
					angl	es		0°±	2 °		7	7	7)SE	Α,	HUI	75 E	_, r	KIGI	11 .	ANC	GLE
					dr	J.	SHREII	NER	1/1	6/90	INC	CH/I	мм		uct fa		QL	JICKIE			code	*
					engr	М.	SMY	(1/1	6/90			•	size	dwg	no					-	-
					chr	М.	SMY	(1/1	6/90	scal	е		۱,		6	≤ 2	32.	7		shee	ŧ
					appd	м.	SMY	(1/1	6/90		<u>5:1</u>		<u> </u>		O	$\mathcal{O}_{\mathcal{C}}$)	<u> </u>		2 0	f 21
she	et	revis	ion																			
inde	ex	shee	t																			


PDM: Rev:AF ³ STATUS: Released Printed: Aug 23, 2008














NOTES:

- 1. RECOMMENDED MOUNTING SCREW SIZE: #2-56 FILLISTER HD MACH SCREW. 3/8" LG FOR 1/16" & 3/32" BOARD, 7/16" LG FOR 1/8" BOARD.
- (2) MOLDING MAT' L: 30% GLASS FILLED POLYESTER, FLAME RETARDANT PER UL-94V-0, COLOR: BLUE.
- (3) PIN MAT'L: 3/4 HARD PHOS BRONZE ALLOY UNS C-51000.
- 4. 1 * MAX DRAFT PERMISSIBLE ON ALL SURFACES UNLESS OTHERWISE SPECIFIED.
- 5. PLATING ON LEAD-IN PORTION OF PIN IS MANUFACTURING OPTION.
- B BASIC DIM SHALL BE LOCATED SYMMETRICAL TO DATUM -Y-.
- (7) LOW PROFILE LATCHES TO BE USED WITH FEMALE CONNECTOR WITHOUT STRAIN RELIEF. STANDARD LATCHES TO BE USED WITH FEMALE CONNECTOR WITH STRAIN RELIEF.
- .040±.003/1.02±.08 DIA HOLE TYP FOR SQ PINS, .035±.003/.89±.08. DIA HOLE TYP FOR RND PINS.
- RETENTION FEATURE AVAILABLE ON CONNECTORS WITH .105/2.67, .120/3.05, OR .150/3.81 TAIL LENGTH. RETENTION P/N INCLUDES THE LETTER 'R' AFTER THE EXISTING P/N. THE EXISTING P/N.

 EXAMPLE: 65823-XXX FOR EXISTING P/N

 65823-XXXR FOR RETENTION P/N

 RETENTION FEATURE LOCATION IS MANUFACTURERS OPTION.
- ROUND PINS HAVE 15 LBS/6.8 KGS MAX INSERTION AND .25 LB/.1 KG MIN RETENTION FORCE WHEN USED IN .035±.003/.89±.08 DIA HOLES AND .062/1.57 THICK PC BOARD.
- SQUARE PINS HAVE A 15 LBS/6.8 KG MAX INSERTION AND .5 LB/.2 KG MIN RETENTION FORCE WHEN USED IN .040±.003/1.02±.08 DIA HOLES AND .062/1.57 THICK PC BOARD.
- 65496-***LF IS JUST A LEAD FREE PRODUCT.
- THE HOUSING OF XXXXX-XYYLF WILL WITHSTAND EXPOSUURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER PROCESS
- PLATING OPTION: MAYBE EITHER GOLD OR GXT PLATING AT MANUFACTURER'S OPTION .

ma	ıt'l. co	ode							s un	less cified			STON			F							
ltr	ecn	no	dr	date				.XX:	±.01	/.X±.	3	١ '	JUP									nect.c	om
AF					lir	near		ΧΧΧ±	.005	/.XX±	:.13	proj	ection	1	title	HE	ΔΠ	FR	\cap		KIF	-	
							XX.	XX±.	0020/	'.XXX:	£.051		7 -	1		, ' 'L	-		. ۷		1716	- ^	
					an	gle	S		0°±	2°		PΓ	ァマ	V	2F	Α,	HUI	72F	. , Ի	RIGH	11	ANC	iLE
					dr	Π,	J. S	HREII	NER	1/1	6/90	IN	CH/I	мм		uct fa		QU	ICKIE			code	•
					en	ıgr	М.	SMYK	(1/1	6/90			-	size	dwg	no					-	-
					ch	ır	М.	SMY	(1/1	6/90	scal	е		1,		6	58	2	7		shee	et
					ар	pd	М.	SMY	(1/1	6/90		5:1		A		O	$\mathcal{I}_{\mathcal{L}}$) <u>_</u> \	\mathcal{I}		3 a	f 21
she	eet	revision																					
ind	lex	sheet				T																	

PDM: Rev:AF 3 STATUS: Released Printed: Aug 23, 2008

		SIZE LATCHES PIN DIM A														
		SIZE	LATCHE NOTE 7		DII	1 A	DIM	1 B	DIM	С	DIM D	DIM	E	TERMINAL PLATING NOTE 12	STY	ſLE
65823-001	1(LF)	2x5	ND	RND	1. 260	′32. 00	. 400/1	0. 16	. 720/1	8. 29	. 105/2. 67	. 86/21	1. 8	30u" /. 76 Au OVER 50u" / 1. 27uN i	-	A
-002	2(LF)	1	f	SQ		1		t	1	1	. 105/2. 67	1		150u°/3. 81u Sn		1
-003	3(LF)			RND				l			. 150/3. 81			30u* /. 76 Au OVER 50u* / 1. 27uN i		
-004	4(LF)			SQ		1		l			. 150/3. 81			150u°/3. 81u Sn		
-005	5(LF)			SQ		į.		ļ			. 675/17. 15			30u"/. 76 Au OVER 50u"/1. 27uNi		
-006	6(LF)	2×5		SQ	1. 260	′32. OO	. 400/1	0. 16	. 720/1	8. 29	. 675/17. 15	. 86/21.	. 8	150u°/3. 81u Sn	4	A
-007	7(LF)	2×7		RND	1. 460	′37. 08	. 600/1	5. 24	. 920/2	3. 37	. 105/2. 67	1. 06/26	6. 9	30u" /. 76 Au OVER 50u" / 1. 27uN i		<u> </u>
-008	8(LF)	1		SQ		1		t	1	•	. 105/2. 67	1		150u°/3. 81u Sn	1 1	1
-009	9(LF)			RND							. 150/3. 81			30u* /. 76 Au OVER 50u* / 1. 27uN i		
-010	0(LF)			SQ				l			. 150/3. 81			150u°/3. 81u Sn		
-011	1(LF)	1		SQ	1	1		ļ			. 675/17. 15	1 1		30u" /. 76 Au DVER 50u" / 1. 27uN i		
-012	2(LF)	2×7		SQ	1. 460	′37. 08	. 600/1	15. 24	. 920/2	3. 37	. 675/17. 15	1. 06/26	6. 9	150u°/3, 81u Sn		
-013	3(LF)	2×8		RND	1. 560	′39. 62	. 700/1	7. 78	1. 020/	25. 91	. 105/2. 67	1. 16/29	9. 4	30u" /. 76 Au DVER 50u" / 1. 27uN i	I	
-014	4(LF)	1		SQ	1	t		t)	. 105/2. 67	1	1	150u° /3. 81u Sn	1 1	1
-015	5(LF)			RND			İ	İ			. 150/3. 81			30u'/. 76 Au DVER 50u'/1. 27uNi		
-016	6(LF)			SQ				l			. 150/3. 81			150u° /3. 81u Sn		
-017	7(LF)			SQ	1	 		†			. 675/17. 15			30u* /. 76 Au DVER 50u* /1. 27uNi		
-018	8(LF)	2×8		SQ	1. 560	′39. 62	. 700/1	7. 78	1. 020/	25. 91	. 675/17. 15	1. 16/29	9. 4	150u² /3. 81u Sn	\top	
-019	9(LF)	2×10		RND	1. 760	44. 70	. 900/2	22. 86	1. 220/	30. 99	. 105/2. 67	1. 36/3	4. 5	30u" /. 76 Au DVER 50u" / 1. 27uN i		
-020	O(LF)	1		SQ	1	t		t	1)	. 105/2. 67	1	1	150u² /3. 81u Sn		
-021	1(LF)			RND							. 150/3. 81			30u* /. 76 Au DVER 50u* /1. 27uNi		
-055	2(LF)			SQ				•			. 150/3. 81			150u° /3. 81u Sn		
-053	3(LF)			SQ	1	,		†			. 675/17. 15			30u* /. 76 Au DVER 50u* /1. 27uNi		
-024	4(LF)	2×10		SQ	1. 760	44. 70	. 900/2	22. 86	1. 220/	30. 99	. 675/17. 15	1. 36/3	4. 5	150u² /3. 81u Sn	\top	
-025	5(LF)	2×13		RND	2. 060	′52. 32	1. 200/	′30. 48	1. 520/	38. 61	. 105/2. 67	1. 66/4	2. 1	30u* /. 76 Au DVER 50u* /1. 27uNi		
-026	6(LF)	1		SQ		t		t)	. 105/2. 67	1	}	150u² /3. 81u Sn		
-027	7(LF)			RND		İ					. 150/3. 81			30u* /. 76 Au DVER 50u* /1. 27uNi		
-028	8(LF)			SQ	1			İ			. 150/3. 81			150u² /3. 81u Sn		
-029	9(LF)	•		SQ	1	,		ļ .			. 675/17. 15			30u* /. 76 Au DVER 50u* /1. 27uNi	1	
_		2x13		SQ	2, 060	′52. 32	1, 200/	′30. 48	1, 520/	38. 61	. 675/17. 15	1, 66/4	2. 1	150u° /3. 81u Sn	\top	
		2×17		RND	2, 460	′62. 48			48. 77	. 105/2, 67	2, 06/5	2. 3	30u*/. 76 Au DVER 50u*/1. 27uNi	\top		
	2(LF)	1		SQ	1	1	1. 600/40. 64 1. 920/4		}	. 105/2. 67	1	1	150u² /3, 81u Sn	+	\vdash	
_	3(LF)			RND	†					. 150/3. 81			30u* /. 76 Au DVER 50u* / 1. 27uNi	+	\vdash	
	4(LF)			SQ	†			 			. 150/3. 81			150u* / 3. 81u Sn	+	\vdash
_	5(LF)			SQ	†	ļ		!			. 675/17. 15			304"/. 76 Au DVER 504"/1, 274N1	+	\vdash
65823-036		2×17	ND	SQ	2, 460	(62.40	1, 600/	40.64	1. 920/	40.77	. 675/17. 15	2, 06/58	2 2	150u'/3, 81u Sn	 '	<u>'</u> D

mat	il. co	ode					erance erwise						/ER		F							
ltr	ecn	no	dr	date			.xx	±.01,	/.X±.	3	1 '	COP,									nect.c	om
AF					line	ır 🗔	±XXX.	.005	/.XX±	:.13	proje	ection	1	title	HE	. V D		$\overline{}$		1/15	-	
						.x	XXX±.	0020	'.XXX:	±.051	1 4) -(1		, 	.AD	EN,	. Q		'NIE	^	ᆪᅴ
					angl	es		0°±	2°		7	ケュ	7	2F	Α,	HUI	K2F	., r	KIGI	11	ANC	GLE
					dr	J. 9	SHREI	NER	1/1	6/90	IN	CH/I	мм		uct fa		QL	IICKIE			code	•
					engr	М.	SMY	<	1/1	6/90			-	size	dwg	no					-	
					chr	М.	SMY	<	1/1	6/90	scal	е		١,		6	≤ 2	32	7		shee	et
					appd	М.	SMY	<	1/1	6/90		<u>5:1</u>		Α		O	\mathcal{I}) _ \)		4 0	f 21
she	et	revis	ion																			
inde	ex	shee	t																			

21

PDM: Rev:AF

								1	2									
		SI	ΙZE	LATO NOT	CHES E 7	PIN SHAPE	וום	1 A	DIM	В	DIM	С	DIM D	DIM	E	TERMINAL PLATING NOTE 12	ST	YLE
65	823-037(LF)	2>	×20	١	10	RND	2. 760/	70. 10	1. 900/	48. 26	2. 220/	56. 39	. 105/2. 67	2. 36/5	9. 9	30u"/. 76u Au OVER 50u"/1. 27u Ni	:	D
1	-038(LF)		1		Ì	SQ		1		1			. 105/2. 67		1	150u²/3. 81u Sn		
	-039(LF)					RND							. 150/3. 81			30u"/. 76u Au OVER 50u"/1. 27u Ni		
	-040(LF)					SQ							. 150/3. 81			150u²/3. 81u Sn		
	-041 (LF)	,	ļ			SQ		ļ		ŀ	,	,	. 675/17. 15	,		30u*/. 76u Au OVER 50u*/1. 27u Ni		
	-042 (LF)	2)	×20			SQ	2. 760/	70. 10	1. 900/	48. 26	2. 220/	56. 39	. 675/17. 15	2. 36/5	9. 9	150u²/3. 81u Sn		
	-043(LF)	2>	×25			RND	3. 260/	82. 80	2. 400/	60. 96	2. 720/	69. 09	. 105/2. 67	2. 86/7	2. 6	30u"/. 76u Au OVER 50u"/1. 27u Ni		
	-044(LF)		1			SQ		1		1			. 105/2. 67		1	150u²/3. 81u Sn		
	-045(LF)					RND							. 150/3. 81			30u*/. 76u Au OVER 50u*/1. 27u Ni		
	-046 (LF)					SQ							. 150/3. 81			150u²/3. 81u Sn		
	-047(LF)	,	ļ		ļ	SQ		ļ			,	,	. 675/17. 15	,		30u*/. 76u Au OVER 50u*/1. 27u Ni		
	-048(LF)	2)	×25	١	10	SQ	3. 260/	82. 80	2, 400/	60. 96	2. 720/	69. 09	. 675/17. 15	2. 86/7	2. 6	150u²/3. 81u Sn	:	D
	-049(LF)	2)	k 5	Z.	TD	RND	1. 260/	32. 00	. 400/1	0. 16	. 720/1	8. 29	. 105/2. 67	. 86/21	. 8	30u"/. 76u Au OVER 50u"/1. 27u Ni		A
	-050(LF)	Ī			1	SQ		1		1		1	. 105/2. 67			150u²/3. 81u Sn		i
	-051 (LF)					RND							. 150/3. 81			30u"/. 76u Au OVER 50u"/1. 27u Ni		
	-052 (LF)					SQ							. 150/3. 81			150u²/3. 81u Sn		
	-053(LF)		ļ			SQ		ļ			,	,	. 675/17. 15	,	,	30u" /. 76u Au OVER 50u" /1. 27u Ni		1
	-054 (LF)	2)	k 5			SQ	1. 260/	32. 00	. 400/1	0. 16	. 720/1	8. 29	. 675/17. 15	. 86/21	. 8	150u²/3. 81u Sn	'	>
	-055(LF)	2)	ĸ7			RND	1. 460/	37. 08	. 600/1	5. 24	. 920/2	3. 37	. 105/2. 67	1. 06/2	6. 9	30u"/. 76u Au OVER 50u"/1. 27u Ni		O.
	-056 (LF)		1			SQ		1		1		1	. 105/2. 67		1	150u²/3. 81u Sn		
	-057 (LF)					RND							. 150/3. 81			30u"/. 76u Au OVER 50u"/1. 27u Ni		
	-058(LF)					SQ							. 150/3. 81			150u²/3. 81u Sn		
	-059(LF)		ļ			SQ		ļ			,	,	. 675/17. 15	,	,	30u" /. 76u Au OVER 50u" /1. 27u Ni		
	-060(LF)	2)	ĸ7			SQ	1. 460/	37. 08	. 600/1	5. 24	. 920/2	3. 37	. 675/17. 15	1. 06/2	6. 9	150u²/3. 81u Sn		n
	-061 (LF)	2)	K 8			RND	1. 560/	39. 62	. 700/1	7. 78	1. 020/	25. 91	. 105/2. 67	1. 16/2	9. 4	30u"/. 76u Au OVER 50u"/1. 27u Ni		O.
	-062 (LF)	Ī				SQ		1		1			. 105/2. 67			150u²/3. 81u Sn		•
	-063(LF)					RND							. 150/3. 81			30u"/. 76u Au OVER 50u"/1. 27u Ni		
	-064 (LF)					SQ							. 150/3. 81			150u²/3. 81u Sn		
	-065(LF)					SQ		ļ		ŀ	,	,	. 675/17. 15	,	,	30u" /. 76u Au OVER 50u" /1. 27u Ni		
	-066 (LF)	2)	K 8			SQ	1. 560/	39. 62	. 700/1	7. 78	1. 020/	25. 91	. 675/17. 15	1. 16/2	9. 4	150u²/3. 81u Sn		
	-067(LF)	â	ĸ10			RND	1. 760/	44. 70	. 900/2	2. 86	1. 220/	30. 99	. 105/2. 67	1. 36/3	4. 5	30u"/. 76u Au OVER 50u"/1. 27u Ni		
	-068(LF)					SQ		†		1			. 105/2. 67	1		150u²/3. 81u Sn		
	-069(LF)					RND							. 150/3. 81			30u" /. 76u Au OVER 50u" /1. 27u Ni		
	-070(LF)					SQ							. 150/3. 81			150u²/3. 81u Sn		
	-071 (LF)					SQ							. 675/17. 15			30u* /. 76u Au OVER 50u* /1. 27u Ni		
65	823-072 (LF)	2>	×10	S.	TD	SQ	1. 760/	44. 70	. 900/2	2. 86	1. 220/	30. 99	. 675/17. 15	1. 36/3	4. 5	150u²/3. 81u Sn	-	D

mat	i'l. code				tolerances un otherwise spe		CUSTOMER	FC)	
ltr	ecn no	dr	date		.XX±.01	/.X±.3	1	***************************************	nnect.com
AF]linea	r .XXX±.005	/.XX±.13	projection	title HEADER, QUICKIE	
				1	.XXXX±.0020/	′.XXX±.051	♦ €1	HEADER, QUICKII	
				angle	es 0°±:	2 •	T W T	SEA, HORSE, RIGHT	ANGLE
				dr	J. SHREINER	1/16/90	INCH/MM	product family QUICKIE	code
				engr	M. SMYK	1/16/90	1110117 11111	size dwg no	_
				PID	W+ 848V-A	7 16/90	egalence Re	leased 6 Frage 3: Jug 23,	25/05*t 5 of 21
				appd	M. SMYK	1/16/90	T'^5:1''	1 A 0 0 0 0 0 0 0 20,	15 of 21

-	4		
THE STATE STATE OF THE PROPERTY OF THE STATE OF THE	form whatever is not permitted without written authority f		
3	ř		
Š	ŧ		
ò	ಕ		
_	ţ		
_	÷		
5	È		
į	ţ		
3	٤		
5	=	≓	
Ž	-	5	
	š	4	
Š	Ξ	듄	
•	Ę	2	
2	ã	Property of FCI. Copyright FCI.	
_	÷	ဒ	
,	٤		
j	<u>s</u>	Ħ	
	L	Œ	
n	š	4	
ĵ	å	Č	
5	Ę	f	
-	•	Ř	
:	٤	ģ	
C	Ŧ	Œ	

									1			l				
	SI	ZE	LATCHES NOTE 7	PIN SHAPE	DIM A	,	DIM	В	DIM	С	DIM D	DIM	E	TERMINAL PLATING NOTE 12	STY	/LE
65823-073 (LF)	2>	(13	CTS	RND	2. 060/52.	. 32	1. 200/	30. 48	1. 520/	38. 61	. 105/2. 67	1. 66/42	2. 1	30u*/. 76u Au OVER 50u*/1. 27u Ni	1	D
-074 (LF)			t	20	1		1		1	ì	. 105/2. 67	l t		150u*/3. 81u′ 1/27u Ni	1	\Box
-075 (LF)				RND							. 150/3. 81			30u"/. 76u Au OVER 50u"/1. 27u Ni		\Box
-076 (LF)				20							. 150/3. 81			150u*/3. 81u′ 1/27u Ni		\Box
-077 (LF)				SQ	ļ ,						. 675/17. 15			30u*/. 76u Au OVER 50u*/1. 27u Ni		\Box
-078 (LF)	2>	(13		SQ	2. 060/52.	. 32	1. 200/:	30. 48	1. 520/	38. 61	. 675/17. 15	1. 66/42	2. 1	150u*/3. 81u′ 1/27u Ni		\Box
-079 (LF)	2>	(17		RND	2. 460/62.	48	1. 600/-	40. 64	1. 920/	48. 77	. 105/2. 67	2. 06/52	2. 3	30u*/. 76u Au OVER 50u*/1. 27u Ni		\Box
-080 (LF)				SQ	1					•	. 105/2. 67	1		150u* /3. 81u′ 1/27u Ni		
-081 (LF)				RND							. 150/3. 81			30u*/. 76u Au DVER 50u*/1. 27u Ni		
-082 (LF)				SQ							. 150/3. 81			150u*/3. 81u′ 1/27u Ni		
-083 (LF)				SQ	,				,	,	. 675/17. 15	,		30u" /. 76u Au OVER 50u" /1. 27u Ni		
-084 (LF)	2>	(17		SQ	2. 460/62.	. 48	1. 600/-	40. 64	1. 920/	48. 77	. 675/17. 15	2. 06/52	2. 3	150u* /3. 81u′ 1/27u Ni		
-085 (LF)	2>	(20		RND	2. 760/70.	. 10	1. 900/	48. 26	2. 220/	56. 39	. 105/2. 67	2. 36/59	9. 9	30u*/. 76u Au OVER 50u*/1. 27u Ni		
-086 (LF)				SQ	1		1		1	ı	. 105/2. 67	1		150u*/3. 81u′ 1/27u Ni		\Box
-087 (LF)				RND							. 150/3. 81			30u'/. 76u Au DVER 50u'/1. 27u Ni		\Box
-088 (LF)				SQ							. 150/3. 81			150u*/3. 81u′ 1/27u Ni		
-089 (LF)		,		SQ	,)	. 675/17. 15	ļ ,		30u*/. 76u Au OVER 50u*/1. 27u Ni		\Box
-090 (LF)	2>	(20		SQ	2. 760/70.	10	1. 900/	48. 26	2. 220/	56. 39	. 675/17. 15	2. 36/59	9. 9	150u* /3. 81u′ 1/27u Ni		
-091 (LF)	2>	(25		RND	3. 260/82.	. 80	2. 400/	50. 96	2. 720/	69. 09	. 105/2. 67	2. 86/72	2. 6	30u" /. 76u Au OVER 50u" /1. 27u Ni		
-092 (LF)				SQ	1					1	. 105/2. 67	1		150u² /3. 81u′ 1/27u Ni		
-093 (LF)				RND							. 150/3. 81			30u*/. 76u Au DVER 50u*/1. 27u Ni		
-094 (LF)				SQ							. 150/3. 81			150u² /3. 81u′ 1/27u Ni		
-095 (LF)		,	ļ	SQ						,	. 675/17. 15			30u*/. 76u Au DVER 50u*/1. 27u Ni		
-096 (LF)	2>	¢25	STD	SQ	3. 260/82.	. 80	2. 400/	50, 96	2. 720/	69. 09	. 675/17. 15	2. 86/72	2. 6	150u*/3. 81u′ 1/27u Ni		
-097 (LF)	2>	ر30	ND	RND	3. 760/95.	. 50	2. 900/	73. 66	3. 220/	81. 79	. 105/2. 67	3. 36/85	5. 3	30u*/. 76u Au DVER 50u*/1. 27u Ni		
-098 (LF)	1		†	SQ	1		f			l	. 105/2. 67	1		150u² /3. 81u′ 1/27u Ni		
-099 (LF)				RND							. 150/3. 81			30u*/. 76u Au DVER 50u*/1. 27u Ni		
-100 (LF)				SQ							. 150/3. 81			150u*/3. 81u′ 1/27u Ni		
-101 (LF)			ļ	SQ							. 675/17. 15			30u" /. 76u Au OVER 50u" /1. 27u Ni		
-102 (LF)			ND	SQ							. 675/17. 15			150u² /3. 81u′ 1/27u Ni		
-103 (LF)			DTS	RND							. 105/2. 67			30u'/. 76u Au DVER 50u'/1. 27u Ni		
-104 (LF)			. 105/2. 67			150u² /3. 81u′ 1/27u Ni										
-105 (LF)			. 150/3. 81			30u" /. 76u Au OVER 50u" /1. 27u Ni										
-106 (LF)			SQ			. 150/3. 81			150u* /3. 81u′ 1/27u Ni							
-107 (LF)			ļ	SQ .			. 675/17. 15			30u" /. 76u Au OVER 50u" /1. 27u Ni	\Box					
65823-108 (LF)	2>	3 0	STD	SQ	3. 760/95.	' 		. 675/17. 15	3, 36/85	5. 3	150u* /3. 81u′ 1/27u Ni	I	D			

	mat	'l. co	ode						es un e spec				STON			F							
[ltr	ecn	no	dr	date			.xx	±.01/	/.X±.	3	,	COP	-								nect.c	om
	AF					linea	r 🗀	XXX±	.005/	/.XX±	.13	proje	ection	1	title	HE	ער.		\cap		·VIE	-	
[.x	xxx±.	.0020	'.XXX±	Ł.051	4	7 -	_1		, I I L	.ADI		- ५		TTIL	- ^ \ \ I (ᆡ	
					angle	es		0°±	2*		7	<u> </u>	7_				75E	., r	KIGE	11	ANC	ELE!	
[dr	J. S	HREI	NER	1/1	6/90	INC	CH/I	ММ		uct fa		QU	ICKIE			code	;
						engr	М.	SMY	<	1/1	6/90			_	size	dwg	no					_	
						chr	М.	SMY	<	1/1	6/90				١,		6	58	30	7		shee	t
						appd	М.	SMY	<	1/1	6/90		<u>5:1</u>		Α		0) _ \	<u> </u>		6 0	f 21
	she	et	revis	ion																			
1	inde	ex	shee	t																			

PDM: Rev:AF ³ STATUS: Released

Printed: Aug 23, 2008

All rights strictly reserved, Reproduction or issue to third	2
form whatever is not permitted without written authority fro	ž
Property of FCI. Copyright FCI.	

	SIZE	LATCHES	PIN	DIM A	DIM B	DIM C	DIM	D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-109(LF)	2×5	ND	SQ	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/2	. 67	. 86/21. 8	30u"/. 76u Au OVER 50u"/1. 27u Ni	Α
-110(LF)	2×7	1	1	1. 460/37. 08	. 600/15. 24	. 920/23. 37	1	Ì	1. 06/26. 9	t	С
-111(LF)	2×8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91			1. 16/29. 4		D
-112(LF)	2×10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99			1. 36/34. 5		
-113(LF)	2×13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61			1. 66/42. 1		
-114(LF)	2×17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77			2. 06/52. 3		
-115(LF)	2×20			2. 760/70. 10	1. 900/48. 26	2, 220/56, 39			2, 36/59, 9		
-116(LF)	2×25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09			2. 86/72. 6		
-117(LF)	2×30	ND		3. 760/95. 50	2. 900/73. 66	3. 220/81. 79			3. 36/85. 3		D
-118(LF)	2×5	STD		1. 260/32. 00	. 400/10. 16	. 720/18. 29			. 86/21. 8		Α
-119(LF)	2×7	1		1. 460/37. 08	. 600/15. 24	. 920/23. 37			1. 06/26. 9		С
-120(LF)	2×8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91			1. 16/29. 4		D
-121(LF)	2×10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99			1. 36/34. 5		1
-122(LF)	2×13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61			1. 66/42. 1		
-123(LF)	2×17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77			2. 06/52. 3		
-124(LF)	2×20			2. 760/70. 10	1. 900/48. 26	2, 220/56, 39			2, 36/59, 9		
-125(LF)	2×25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09			2. 86/72. 6		$\neg \neg$
-126(LF)	2×30	STD	SQ	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2	. 67	3. 36/85. 3	30u"/. 76u Au OVER 50u"/1. 27u Ni	D
-127(LF)	2×5	ND	RND	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 150/3	. 81	. 86/21. 8	30u'/. 76u GXT/GOLD FLASH	А
-128(LF)	2×7	1	1	1. 460/37. 08	. 600/15. 24	. 920/23. 37	1	t	1. 06/26. 9	t	С
-129(LF)	2×8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91			1. 16/29. 4		D
-130(LF)	2×10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99			1. 36/34. 5		1
-131(LF)	2×13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61			1. 66/42. 1		
-132(LF)	2×17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77			2. 06/52. 3		
-133(LF)	2×20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39			2, 36/59, 9		
-134(LF)	2×25			3. 260/82. 80	2. 400/60. 96	2, 720/69, 09			2, 86/72, 6		\neg
-135(LF)	2×30	NO		3. 760/95. 50	2. 900/73. 66	3. 220/81. 79			3. 36/85. 3		D
-136(LF)	2×5	QT2		1. 260/32. 00	. 400/10. 16	. 720/18. 29			. 86/21. 8		Α
-137(LF)	2×7	1		1. 460/37. 08	. 600/15. 24	. 920/23. 37			1. 06/26. 9		С
-138(LF)	2×8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91			1. 16/29. 4		D
-139(LF)	2×10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99			1. 36/34. 5		1
-140(LF)	2×13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61			1. 66/42. 1		
-141(LF)	2×17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77			2. 06/52. 3		
-142(LF)	2×20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39			2. 36/59. 9		
	T			3, 260/82, 80	2, 400/60, 96	2, 720/69, 09			2. 86/72. 6		
-143(LF)	2×25	<u> </u>		3. 2607 62. 60	2. 400/60. 36	L. 720707.07		<u>† </u>	L. 007 7 L. 0	<u> </u>	

	mat	'l. co	de					erance erwise						/ER		F							
[ltr	ecn	no	dr	date			.XX:	±.01,	/.X±.			COP									nect.co	om
[AF					linec	ır 🗌	XXX±	.005	/.XX±	:.13	proje	ection	1	title	HE	۷Π	FR	\cap		KIF		
[۸.	XXX±.	0020	/.XXX:	±.051	4	7 -	_1		, _	ΔD		. Q		TIL	^	, , , ,
						angl	es		0°±	2°		7	<u> </u>	7_	DE.	Α, Ι	HUI	75E	., r	राजा	1 1 .	ANC	,LE
[dr	J. :	SHREII	NER	1/1	6/90	INC	CH/I			ıct far		QL	ICKIE			code	•
						engr	М.	SMY	(1/1	6/90			_	size	dwg	no					-	-
Į						chr	М.	SMY	(1/1	6/90	scal			ا ۸ ا		6	58	30	7		shee	et
						appd	М.	SMY	(1/1	6/90		<u>5:1</u>		Α		0) _ \	<u> </u>		7 0	f 21
	she		revis	ion																			
21	inde	ex	shee	t																			

4	-	•
	7	"
L	J	"
	Ĺ	
_	_	
	5	

	_													_			
	s	IZE	LATC:		PIN SHAPE	DIM	I A	DII	1 B	DIM	С	DIM D	DIM	E	TERMINAL PLATING NOTE 12	STY	LE
65823-145 (LF)	a	:×5	L	P	RND	1. 260/	32. 00	. 400/1	0. 16	. 720/1	8. 29	. 105/2. 67	. 86/21	. 8	30u' /. 76u Au DVER 50u' /1. 27u Ni	4	١
-146(LF)	\perp	t	f		SQ		İ		f			. 105/2. 67		1	150u" /3.81u Sn		
-147 (LF)	\Box				RND							. 150/3. 81			30u' /. 76u Au DVER 50u' /1. 27u Ni		
-148(LF)					SQ							. 150/3. 81			150u" /3.81u Sn		
-149(LF)					SQ		ļ		ŀ		,	. 675/17. 15		ļ	30u' /. 76u Au DVER 50u' /1. 27u Ni		
-150 (LF)	a	:×5			SQ	1. 260/	32. 00	. 400/1	0. 16	. 720/1	8. 29	. 675/17. 15	. 86/21	. 8	150u" /3.81u Sn	4	١
-151 (LF)	a	2×7			RND	1. 460/	37. 08	. 600/1	5. 24	. 920/2	3. 37	. 105/2. 67	1. 06/2	6. 9	30u' /. 76u Au DVER 50u' /1. 27u Ni	(;
-152 (LF)	\Box	t			SQ		1		t			. 105/2. 67		1	150u* /3.81u Sn		
-153 (LF)					RND							. 150/3. 81			30u' /. 76u Au OVER 50u' /1. 27u Ni		
-154 (LF)	Т				SQ							. 150/3. 81			150u" /3.81u Sn		
-155 (LF)	1	1			SQ		ļ		ŀ		,	. 675/17. 15			30u' /. 76u Au OVER 50u' /1. 27u Ni		
-156 (LF)	a	2×7			SQ	1. 460/	37. 08	. 600/1	5. 24	. 920/2	3. 37	. 675/17. 15	1. 06/2	6. 9	150u* /3.81u Sn	-	;
-157 (LF)	a	2×8			RND	1. 560/	39. 62	. 700/1	7. 78	1. 020/	25. 91	. 105/2. 67	1. 16/2	9. 4	30u' /. 76u Au DVER 50u' /1. 27u Ni	1)
-158 (LF)	Τ	t			SQ		İ		t			. 105/2. 67		1	150u" /3.81u Sn		
-159(LF)					RND							. 150/3. 81			30u' /. 76u Au OVER 50u' /1. 27u Ni		
-160 (LF)					SQ							. 150/3. 81			150u" /3.81u Sn		
-161 (LF)		1			SQ		ļ		ŀ		,	. 675/17. 15			30u' /. 76u Au OVER 50u' /1. 27u Ni		
-162(LF)	a	2×8			SQ	1. 560/	39. 62	. 700/1	7. 78	1. 020/	25. 91	. 675/17. 15	1. 16/2	9. 4	150u" /3.81u Sn		
-163(LF)	P	×10			RND	1. 760/	44. 70	. 900/2	2. 86	1. 220/	30. 99	. 105/2. 67	1. 36/3	4. 5	30u' /. 76u Au OVER 50u' /1. 27u Ni		
-164(LF)		1			SQ		1		t		1	. 105/2. 67		1	150u" /3.81u Sn		
-165(LF)	1				RND							. 150/3. 81			30u' /. 76u Au OVER 50u' /1. 27u Ni		
-166 (LF)					SQ							. 150/3. 81			150u* /3.81u Sn		
-167(LF)		1			SQ		ļ		ļ		,	. 675/17. 15		,	30u' /. 76u Au OVER 50u' /1. 27u Ni		
-168(LF)	2	×10			SQ	1. 760/	44. 70	. 900/2	2. 86	1. 220/	30, 99	. 675/17. 15	1. 36/3	4. 5	150u" /3.81u Sn		
-169(LF)	a	×13			RND	2. 060/	52. 32	1. 200/	30. 48	1. 520/	38. 61	. 105/2. 67	1. 66/4	2. 1	30u' /. 76u Au OVER 50u' /1. 27u Ni		
-170 (LF)		t			SQ		1		t			. 105/2. 67		1	150u* /3.81u Sn		
-171 (LF)					RND							. 150/3. 81			30u' /. 76u Au OVER 50u' /1. 27u Ni		
-172 (LF)					SQ							. 150/3. 81			150u* /3.81u Sn		
-173 (LF)	T	1			SQ		ļ		ļ		,	. 675/17. 15		,	30u' /. 76u Au OVER 50u' /1. 27u Ni		
-174 (LF)	2	×13			SQ	2. 060/	52. 32	1. 200/	30. 48	1. 520/	38. 61	. 675/17. 15	1. 66/4	2. 1	150u" /3.81u Sn		
-175 (LF)	a	×17			RND	2. 460/	62. 48	1. 600/	40. 64	1. 920/	48. 77	. 105/2. 67	2. 06/5	2. 3	30u' /. 76u Au OVER 50u' /1. 27u Ni		
-176 (LF)	1	1			SQ		Ì		t		1	. 105/2. 67		1	150u* /3.81u Sn		
-177 (LF)					RND							. 150/3. 81			30u' /. 76u Au OVER 50u' /1. 27u Ni		
-178 (LF)	\perp				SQ							. 150/3. 81			150u* /3.81u Sn		
-179(LF)	\perp	<u> </u>	,		SQ							. 675/17. 15			30u' /. 76u Au OVER 50u' /1. 27u Ni		
65823-180 (LF)	Z	×17	LI	P	SQ	2. 460/	62. 48	1. 600/	40. 64	1. 920/	48. 77	. 675/17. 15	2. 06/5	2. 3	150u" /3.81u Sn	I)
										•							
i																	

	mat	mat'l. code Itr ecn no dr date						rance: rwise					STON			F							
	ltr	ecn	no	dr	date			£XX.	±.01/	′.x±.:			COP			•	7					nect.c	om
	AF					lined	ır 🔼	XXX±.	005/	/.XX±	.13	proje	ection	1	title	, TE	. א רו	FD	\cap	ווור	KIE	•	
							.x	XXX±.C	020/	LXXX.	±.051	4	7 7	1	ارد	, I I L	HOI		. ~		/NIL	^	\
						angl	es		0°±	2*		7	<i>σ</i>	7				75E	., r	राजा	ا ا -	ANC	GLE
						dr	J. S	HREIN	IER	1/10	6/90	INC	CH/I			uct fa		QU	ICKIE			code	•
						engr	М.	SMYK		1/10	6/90			_	size	dwg	no					_	-
						chr	М.	SMYK		1/10	6/90				۱ 🛕		6	58	? O .	7		shee	et
						appd	М.	SMYK		1/10	6/90		<u>5:1</u>		Α		0	$\frac{\mathcal{I}}{\mathcal{I}}$) <u> </u>	<u> </u>		8 0	f 21
	she	et	revis	ion																			
21	inde	ex	shee	t																			

PDM: Rev:AF

3

2

3 STATUS: Released

1 | 2

SSB2-181(LF) 2-20 LP RND 2,760/70.10 1,900/48,26 2,20/56.39 1.05/2.67 2,36/59,9 30/1/.76u DVER 50/1/.12v Ni D 1-184(LF) SSD 1,150/3.81 1,150/3.81 1,500/1/.81u Sn 1,150/3.81 1,150/3.81 1,500/1/.81u Sn 1,150/3.81 1,150/3.81 1,500/1/.81u Sn 1,150/3.81 1,150/3.81 1,150/3.81 1,500/1/.81u Sn 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,150/3.81 1,			S	ZE		CHES E 7	PII SHA		DIM	A	DIM	В	DIM	С	DIM	D	DIM	E		TERMINAL NOTE		ST	YLE
-183(LF) RND	65	823-181(LF)	2:	<20	L	_P	RN	D	2. 760/	70. 10	1. 900/	48. 26	2. 220/	56. 39	. 105/2	67	2. 36/5	9. 9	30u* /. 76	u OVER 5	Ou⁴/1.27u Ni		D
-186(LF)		-182(LF)	ľ	1		t	SQ		•			†			. 105/2	67				150u * /3.	Blu Sn		1
-185(LF) 2x50		-183(LF)					RN	D							. 150/3.	81			30u* /. 76	u OVER 5	Du⁴/1.27u Ni		
-186(LF) 2x20		-184(LF)					SQ								. 150/3.	81				150u * /3.	Blu Sn		
-187(LF) 2x25		-185(LF)	Ι,				SG	2							. 675/1	7. 15			30u* /. 76	u OVER 5	Ou'/1. 27u Ni		
		-186(LF)	2:	2 0			SG	2	2. 760/	70. 10	1. 900/	48. 26	2. 220/	56. 39	. 675/1	7. 15	2. 36/5	9. 9		150u * /3.	81u Sn		
-189(LF)		-187(LF)	2:	2 5			RN	D	3. 260/	82. 80	2. 400/	60. 96	2. 720/	69. 09	. 105/2.	67	2. 86/7	2. 6	30u* /. 76	u OVER 5	0u²/1. 27u Ni		
-190(LF)		-188(LF)	-				SQ		1			t	1		. 105/2	67	1			150u * /3.	Blu Sn		
-191(LF)		-189(LF)					RN	D							. 150/3.	81			30u* /. 76	u OVER 5	0u²/1. 27u Ni		
-192(LF) 2x25		-190(LF)					SQ								. 150/3	81				150u*/3.	B1u Sn		
-193(LF) 2x30		-191(LF)	Ι,				SG	2		,		,		,	. 675/1	7. 15			30u² /. 76	u OVER 5	Du'/1. 27u Ni		
-194(LF) SQ .105/2.67 .150/4/3.81u Sn .195/2.67 .150u*/3.81u Sn .196(LF) .50 .150/3.81 .150/3.81 .150u*/3.81u Sn .150/3.81 .150u*/3.81u Sn .150u*/3.81u Sn .150u*/3.81u Sn .150u*/3.81u Sn .150u*/3.81u Sn .150u*/3.81u Sn .150u*/3.81u Sn .194(LF) & .250 .1260/32.00 .400/10.16 .720/18.29 .105/2.67 .86/21.8 .30u*/.76u DVER 50u*/1.27u Ni .400/10.16 .720/18.29 .105/2.67 .86/21.8 .30u*/.76u DVER 50u*/1.27u Ni .400/10.16 .720/18.29 .105/2.67 .86/21.8 .30u*/.76u DVER 50u*/1.27u Ni .400/10.16 .720/18.29 .105/2.67 .86/21.8 .30u*/.76u DVER 50u*/1.27u Ni .400/10.16 .720/18.29 .105/2.67 .86/21.8 .30u*/.76u DVER 50u*/1.27u Ni .400/10.16 .720/18.29 .105/2.67 .86/21.8 .30u*/.76u DVER 50u*/1.27u Ni .400/10.16 .720/18.29 .105/2.67 .86/21.8 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40 .100/40.40		-192(LF)	2:	(25			SG	,	3. 260/	82. 80	2. 400/	60. 96	2. 720/	69. 09	. 675/1	7. 15	2. 86/7	2. 6		150u * /3.	Blu Sn		
-195(LF) RND		-193(LF)	2:	30			RN	D	3. 760/	95. 50	2. 900/	73. 66	3, 220/	81. 79	. 105/2	67	3. 36/8	5. 3	30u* /. 76	u OVER 5	Du* / 1. 27u Ni		
-196(LF)		-194(LF)					SQ					t)	. 105/2	67				150u * /3.	81u Sn		
-197(LF)		-195(LF)					RN	D							. 150/3	81			30u* /. 76	u OVER 5	0u*/1. 27u Ni		
-198(LF) 2x30		-196(LF)	Г				SQ								. 150/3.	81				150u* /3.	81u Sn		
-199(LF) 2x5		-197(LF)	Ι.				SG	2							. 675/1	7. 15			30u* /. 76	u OVER 5	0u²/1. 27u Ni		ļ —
-200(LF) 2x7		-198(LF)	2;	30			t		3. 760/	95. 50	2. 900/	73. 66	3. 220/	81. 79	. 675/1	7. 15	3. 36/8	5. 3		150u* /3.	81u Sn		D D
-201(LF) 2x8		-199(LF)	2,	5					1. 260/	32, 00	. 400/1	0. 16	. 720/1	8. 29	. 105/2	67	. 86/21	. 8	30u* /. 76	u OVER 5	0u*/1. 27u Ni		Α
-202(LF) 2x10		-200(LF)	2;	ر7					1. 460/	37. 08	. 600/1	5. 24	. 920/2	3. 37	1		1. 06/2	6. 9			1		С
-203(LF) 2x13		-201(LF)	2,	ر8					1. 560/	39. 62	. 700/1	7. 78	1. 020/	25. 91			1. 16/2	9. 4					D
-204(LF) 2x17		-202(LF)	2:	10					1. 760/	44. 70	. 900/2	2. 86	1. 220/	30. 99			1. 36/3	4. 5					1
-205(LF) 2x20		-203(LF)	2	13					2. 060/	52, 32	1. 200/	30. 48	1. 520/	38. 61			1. 66/4	2. 1					
-206(LF) 2x25		-204(LF)	2;	(17					2. 460/	62. 48	1. 600/	40. 64	1. 920/	48. 77			2. 06/5	2. 3					
-207(LF) 2x30		-205(LF)	2	20					2. 760/	70. 10	1. 900/	48. 26	2. 220/	56. 39			2. 36/5	9. 9					
-208(LF) 2x5 RND 1. 260/32. 00 . 400/10. 16 . 720/18. 29 . 150/3. 81 . 86/21. 8 30u*/. 76u GXT/GDLD FLASH A -209(LF) 2x7 1. 460/37. 08 . 600/15. 24 . 920/23. 37 1. 06/26. 9 C -210(LF) 2x8 1. 560/39. 62 . 700/17. 78 1. 020/25. 91 1. 16/29. 4 D -211(LF) 2x10 1. 760/44. 70 . 900/22. 86 1. 220/30. 99 1. 36/34. 5 D -212(LF) 2x13 2. 060/52. 32 1. 200/30. 48 1. 520/38. 61 1. 66/42. 1 C -213(LF) 2x17 2. 460/62. 48 1. 600/40. 64 1. 920/48. 77 2. 06/52. 3 C -214(LF) 2x20 2. 760/70. 10 1. 900/48. 26 2. 220/56. 39 2. 36/59. 9 C -215(LF) 2x25 3. 260/82. 80 2. 400/60. 96 2. 720/69. 09 2. 86/72. 6		-206(LF)	2:	<25					3. 260/	82, 80	2. 400/	60. 96	2. 720/	69. 09			2. 86/7	2, 6			1		!
-209(LF) 2x7		-207(LF)	2	ر30			50	,	3. 760/	95, 50	2. 900/	73. 66	3. 220/	81. 79	105/2	67	3. 36/8	5. 3	30u* /. 76	u OVER 5	Du'/1 27u Ni		D.
-210(LF) 2x8		-208(LF)	2;	√ 5			RN	D	1. 260/	32. 00	. 400/1	0. 16	. 720/1	8. 29	. 150/3	81	. 86/21	. 8	30u* /	76u GXT	GOLD FLASH		Α
-211(LF) 2x10		-209(LF)	2:	ر7			t		1. 460/	37. 08	. 600/1	5. 24	. 920/2	3. 37	1		1. 06/2	6. 9			1		С
-212(LF) 2x13		-210(LF)	2;	۷8					1. 560/	39. 62	. 700/1	7. 78	1. 020/	25. 91			1. 16/2	9. 4					D
-213(LF) 2x17		-211(LF)	2	ر10					1. 760/	44. 70	. 900/2	2. 86	1. 220/	30. 99			1. 36/3	4, 5					t
-214(LF) 2x20		-212(LF)	2,	13					2. 060/	52. 32	1. 200/	30. 48	1. 520/	38. 61			1. 66/4	2. 1					
-215(LF) 2x25 3. 260/82. 80 2. 400/60. 96 2. 720/69. 09 2. 86/72. 6		-213(LF)	2	(17					2. 460/	62. 48	1. 600/	40. 64	1. 920/	48. 77			2. 06/5	2. 3					
-215(LF) 2x25 3. 260/82. 80 2. 400/60. 96 2. 720/69. 09 2. 86/72. 6			⊢				\vdash	\neg			-		+										
			H	_			\Box				2. 400/	60. 96	+				2. 86/7	2. 6			1		1
	65		⊢		1	<u>.</u> P	RN	D D			-		+		. 150/3.	81	1		30u* /	76u GXT	GOLD FLASH		D.
			_				<u> </u>	!					'									'	

	mat	mat'l. code Itr ecn no dr date							es un	less cified				/ER		F							
	ltr	ecn	no	dr	date			.xx	±.01,	/.X±.	3		COP									nect.c	om
	AF					lineo	ır 🔼	XXX±	.005	/.XX±	.13	proje	ection	1	title	HE	. א רו	FD	\cap	ווור	יעוב	-	
							.x	XXX±.	0020	/.XXX	Ł.051	4	7 7	1	ارر		HOI				'VIL	- ^ ^ \ \ (\
						angle	es		0°±	2*		7	<i>T</i>	7				75E	., r	राजा	<u> </u>	ANC	,LE
						dr	J. S	HREI	NER	1/1	6/90	INC	CH/I			uct fa		QU	ICKIE			code	;
						engr	М.	SMY	(1/1	6/90			_	size	dwg	no					_	-
						chr	М.	SMY	(1/1	6/90				۱,		6	58	20	7		shee	t
						appd	М.	SMY	(1/1	6/90		<u>5:1</u>		Α		0	\mathcal{I}) _ \	<u> </u>		9 0	f 21
	she	et	revis	sion																			
21	inde	ex	shee	t																			

3

2

PDM: Rev:AF

3 STATUS: Released

Printed: Aug 23, 2008

1 | 2

В

A STATE OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY OF THE PAR	form whatever is not permitted without written authority from		
5	ted without writte	t FCI.	
	' is not permitt	Property of FCI. Copyright FCI.	
	form whatever	Property of	В

							1 2		_						
		SIZE	LATCH NOTE		PIN SHAPE	DIM A	DIM B	DIM C	DIM D		DIM E	TERMINAL PLAT NOTE 12	ING	STY	YLE
5823-217	7(LF)	2x5	ND		RND	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/2	. 67	. 86/21. 8	30u*/. 76u GXT/GOLI) FLASH	7	Α
1-218	8(LF)	2×7	1		t	1. 460/37. 08	. 600/15. 24	. 920/23. 37		•	1. 06/26. 9	†		7	С
-219	9(LF)	2×8				1. 560/39. 62	. 700/17. 78	1. 020/25. 91			1. 16/29. 4			1	D
-52	0(LF)	2×10				1. 760/44. 70	. 900/22. 86	1. 220/30. 99			1. 36/34. 5			7	t
-22	21(LF)	2×13				2. 060/52. 32	1. 200/30. 48	1. 520/38. 61			1. 66/42. 1			$\neg \neg$	T
-22	2(LF)	2×17				2. 460/62. 48	1. 600/40. 64	1. 920/48. 77			2. 06/52. 3			$\neg \neg$	T
-52:	3(LF)	2×20				2. 760/70. 10	1. 900/48. 26	2. 220/56. 39			2. 36/59. 9			$\neg \neg$	T
-52	24(LF)	2×25			\neg	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	,		2. 86/72. 6			$\neg \neg$	Ţ
-22	5(LF)	2×30			RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2	. 67	3. 36/85. 3			1	D
-55	6(LF)	2×5			SQ	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 675/1	7. 15	. 86/21. 8			7	Α
-22	7(LF)	2×7			t	1. 460/37. 08	. 600/15. 24	. 920/23. 37	1)	1. 06/26. 9			7	С
-226	8(LF)	2×8				1. 560/39. 62	. 700/17. 78	1. 020/25. 91			1. 16/29. 4			7	D
-22	9(LF)	2×10				1. 760/44. 70	. 900/22. 86	1. 220/30. 99			1. 36/34. 5			7	ī
-23	30X LF>	2×13				2. 060/52. 32	1. 200/30. 48	1. 520/38. 61			1. 66/42. 1			\top	Ť
-23	31(LF)	2×17				2. 460/62. 48	1. 600/40. 64	1. 920/48. 77			2. 06/52. 3			\top	t
-23	BE(LF)	2×20				2. 760/70. 10	1. 900/48. 26	2. 220/56. 39			2. 36/59. 9			\top	t
-23	33(LF)	2×25	,		.	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09			2. 86/72. 6			\top	Ţ
-23	34(LF)	2×30	N		SQ	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 675/1	7. 15	3. 36/85. 3			 	D
-23	35(LF)	2x5	ST	D	RND	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/2	. 67	. 86/21. 8			1	Α
-23	36(LF)	2×7	t		t	1. 460/37. 08	. 600/15. 24	. 920/23. 37	1)	1. 06/26. 9			 	С
-23	37(LF)	2×8				1. 560/39. 62	. 700/17. 78	1. 020/25. 91			1. 16/29. 4			1	D
-23	8(LF)	2×10				1. 760/44. 70	. 900/22. 86	1. 220/30. 99			1. 36/34. 5			1	Ť
-53	9X LF)	2×13				2. 060/52. 32	1. 200/30. 48	1. 520/38. 61			1. 66/42. 1			\top	T
-240	0(LF)	2×17				2. 460/62. 48	1. 600/40. 64	1. 920/48. 77			2. 06/52. 3			\top	t
-24	1(LF)	2×20				2. 760/70. 10	1. 900/48. 26	2. 220/56. 39			2. 36/59. 9			\top	t
-248	2(LF)	2×25				3. 260/82. 80	2. 400/60. 96	2. 720/69. 09			2. 86/72. 6			\top	ţ
-243	3(LF)	2×30			RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2	. 67	3. 36/85. 3			 	D
-244	4(LF)	2x5			SQ	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 150/3	. 81	. 86/21. 8			—	Α
-245	5(LF)	2×7				1. 460/37. 08	. 600/15. 24	. 920/23. 37	1	1	1. 06/26. 9			1	С
-24	6(LF)	2×8				1. 560/39. 62	. 700/17. 78	1. 020/25. 91			1. 16/29. 4			1	D
-24	7(LF)	2×10				1. 760/44. 70	. 900/22. 86	1. 220/30. 99			1. 36/34. 5			1	Ŧ
-248	8(LF)	2×13				2. 060/52. 32	1. 200/30. 48	1. 520/38. 61			1. 66/42. 1			\top	t
-249	9(LF)	2×17				2. 460/62. 48	1. 600/40. 64	1. 920/48. 77			2. 06/52. 3			\top	t
-250	0(LF)	2×20				2. 760/70. 10	1. 900/48. 26	2. 220/56. 39			2. 36/59. 9			+	t
-25	1(LF)	2×25			\rightarrow	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09			2. 86/72. 6			+	ţ
5823-25		2×30	TZ	<u>,</u>	SQ	3, 760/95, 50	2, 900/73, 66	3, 220/81, 79	. 150/3	. 81	3, 36/85, 3	30u*/, 76u GXT/GDL1) FLASH	+;	D

mat	t'l. co	de					rance rwise			l		STON			F							
ltr	ecn	no	dr	date			.XX:	±.01,	/.X±.	3		COP				_					nect.c	om
AF					line	.XXXX±.0020/.XXX±.051			4' '.	ection	1	title	, HE	AD	FR	Ω	UIC	KIF	-			
1										<i>></i>	$\overline{}$	ا				. ~	~.~	· · · ·	-	<u>-</u>		
					angl	angles 0°±2°			1	ケュ	<u> </u>	SE	Α,	HOI	₹SE	. ,	RIGH	 	ANC	<i>i</i> LE		
					dr	angles 0°±2° dr J. SHREINER 1/16/90			INC	CH/I	мм		uct fa		QU	ICKIE			code	;		
					ungles 0 ±2				-	size	dwg	no] -	-				
					chr	М.	SMY	(1/1	6/90	scal	е		۱,		6	58	2	マ		shee	;t
					appd	М.	SMY	<	1/1	6/90		5:1		Α		O	$\mathcal{O}_{\mathcal{C}}$) <u>/</u> .	\cup		100	f 21
she	et	revis	ion																			
] inde	-v	revision sheet																				

3 |

PDM: Rev:AF ³ STATUS:Released

Printed: Aug 23, 2008

	form whatever is not permitted without written authority from the proprietor.	Property of FCI. Copyright FCI.
1 1	form whatever	Property of
	_	

														—
	SIZE	LATCHES NOTE 7	PII		DIM A	DIM B	DIM C	DIM D		DIM E	TERMINAL NOTE		STYLE	
65823-253(LF)	2x5	LP	RN	ID D	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/2	. 67	. 86/21. 8	30u* /. 76u GXT/	GOLD FLASH	А	
-254(LF)	2×7	1	1		1. 460/37. 08	. 600/15. 24	. 920/23. 37		1	1. 06/26. 9		1	С	
-255(LF)	2×8				1. 560/39. 62	. 700/17. 78	1. 020/25. 91			1. 16/29. 4			D	
-256(LF)	2×10				1. 760/44. 70	. 900/22. 86	1. 220/30. 99			1. 36/34. 5			1	
-257(LF)	2×13				2. 060/52. 32	1. 200/30. 48	1. 520/38. 61			1. 66/42. 1				
-258(LF)	2×17				2. 460/62. 48	1. 600/40. 64	1. 920/48. 77			2. 06/52. 3				
-259(LF)	5×50				2. 760/70. 10	1. 900/48. 26	2. 220/56. 39			2. 36/59. 9				
-260(LF)	2×25				3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	,	,	2. 86/72. 6				
-261(LF)	2×30		RN	מו	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2	. 67	3. 36/85. 3			D	
-262(LF)	2×5		SG	,	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 675/1	7. 15	. 86/21. 8			Α	
-263(LF)	2×7		ı		1. 460/37. 08	. 600/15. 24	. 920/23. 37	1)	1. 06/26. 9			С	
-264(LF)	2×8				1. 560/39. 62	. 700/17. 78	1. 020/25. 91			1. 16/29. 4			D	٦
-265(LF)	2×10				1. 760/44. 70	. 900/22. 86	1. 220/30. 99			1. 36/34. 5			1	٦
-266(LF)	2×13				2. 060/52. 32	1. 200/30. 48	1. 520/38. 61			1. 66/42. 1				
-267(LF)	2×17				2. 460/62. 48	1. 600/40. 64	1. 920/48. 77			2. 06/52. 3				Ī
-268(LF)	2×20				2. 760/70. 10	1. 900/48. 26	2. 220/56. 39			2. 36/59. 9				٦
-269(LF)	2×25	,			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	,	,	2. 86/72. 6				
-270(LF)	2×30	LP	SC	,	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 675/1	7. 15	3. 36/85. 3	30u* /. 76u GXT/	GOLD FLASH	D	
-271(LF)	2x5	ND	RN	Œ	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/2	. 67	. 86/21. 8	15u*. 38u Au 🗅	/ER 50u*/1. 27u Ni	Α	
-272(LF)	2×7	t	1		1. 460/37. 08	. 600/15. 24	. 920/23. 37)	1. 06/26. 9		†	С	
-273(LF)	2x8				1. 560/39. 62	. 700/17. 78	1. 020/25. 91			1. 16/29. 4			D	
-274(LF)	2×10				1. 760/44. 70	. 900/22. 86	1. 220/30. 99			1. 36/34. 5				
-275(LF)	2×13				2. 060/52. 32	1. 200/30. 48	1. 520/38. 61			1. 66/42. 1				
-276(LF)	2×17				2. 460/62. 48	1. 600/40. 64	1. 920/48. 77			2. 06/52. 3				
-277(LF)	2×20				2. 760/70. 10	1. 900/48. 26	2. 220/56. 39			2. 36/59. 9				
-278(LF)	2×25				3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	,	,	2. 86/72. 6				
-279(LF)	2×30				3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2	. 67	3. 36/85. 3			D	
-280(LF)	2x5				1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 150/3	. 81	. 86/21. 8			Α	
-281(LF)	2×7				1. 460/37. 08	. 600/15. 24	. 920/23. 37	1)	1. 06/26. 9			С	
-282(LF)	2×8				1. 560/39. 62	. 700/17. 78	1. 020/25. 91			1. 16/29. 4			D	
-283(LF)	2×10				1. 760/44. 70	. 900/22. 86	1. 220/30. 99			1. 36/34. 5			1	
-284(LF)	2×13				2. 060/52. 32	1. 200/30. 48	1. 520/38. 61			1. 66/42. 1				
-285(LF)	2×17				2. 460/62. 48	1. 600/40. 64	1. 920/48. 77			2. 06/52. 3				
-286(LF)	2×20				2. 760/70. 10	1. 900/48. 26	2, 220/56, 39			2, 36/59, 9				
-287(LF)	2×25		\Box		3. 260/82. 80	2. 400/60. 96	2. 720/69. 09			2. 86/72. 6		ļ		
65823-288(LF)	2×30	ND	RN	D	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 150/3	. 81	3. 36/85. 3	15u*. 38u Au 🗅	/ER 50u* / 1. 27u Ni	D]
							-	•						_

	ma	mat'l. code Itr ecn no dr date					lerance herwise						/ER		F	<u>C)</u>)						
	ltr	ecn	no	dr	date			.xx	±.01,	/.X±.	3		COP			3	ررد	'				nect.co	om
	AF					line	ear [.xxx±	.005	/.XX±	.13	proje	ection	ì	title	HE	V D		$\overline{}$		·IZ I E		
							.xxxx±.	.0020	/.XXX	Ł.051	4) +	1		, I I I	AD!		. 攵		'NIC	^		
						anç	les		0°±	2°		7	アユ	7)SE	Α, Ι	HUI	₹5E	., F	KIGF	1 1 .	ANC	iLE
						dr	J.	SHREI	NER	1/1	6/90	INC	CH/I			ıct faı		QU	ICKIE			code	;
						enç	ır N	I. SMY	<	1/1	6/90			-	size	dwg	no					-	-
						chr	N	I. SMY	<	1/1	6/90	scal			١,		6	58	20	マ		shee	et
						арр	d N	I. SMY	<	1/1	6/90		<u>5:1</u>		Α		O		(<u>ر</u>		110	f 21
	she	et	revis	ion																			
21	ind	ex	shee	t																			

3 |

PDM: Rev:AF ³ STATUS: Released Printed: Aug 23, 2008

3	۶			
2	å			
5	tten			
5	Ĭ			
יים ביים	without	ci.		
HILL STILLS STILLING FESTIVED. REPRODUCTION OF 1850E tO	form whatever is not permitted without written authori	Property of FCI. Copyright FCI.		
<u>.</u>	å	ပ		
2	2	٠ <u>۲</u>		
0	ver	<u>۔</u>		
21.6	whate	erty	В	
-	Form	Prop		

				1	2				<u> </u>		
	SIZE	LATCHE NOTE	1 -1.72-	DIM A	DIM B	DIM C	DIM D		DIM E	TERMINAL PLATING NOTE 12	ST
65823-289(LF)	2x5	ND	SQ	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/2.	67	. 86/21. 8	15u". 38u Au OVER 50u"/1. 27u Ni	
-290(LF)	2×7	1	1	1. 460/37. 08	. 600/15. 24	. 920/23. 37	1		1. 06/26. 9	1	
-291(LF)	2×8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91			1. 16/29. 4		
-292(LF)	2×10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99			1. 36/34. 5		
-293(LF)	2×13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61			1. 66/42. 1		
-294(LF)	2×17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77			2. 06/52. 3		
-295(LF)	2×20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39			2. 36/59. 9		
-296(LF)	2×25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	,		2. 86/72. 6		
-297(LF)	2×30	ND	SQ	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2.	67	3. 36/85. 3		
-298(LF)	2×5	STE	RND	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 675/1	7. 15	. 86/21. 8		
-299(LF)	2×7	l t	1	1. 460/37. 08	. 600/15. 24	. 920/23. 37	1 1		1. 06/26. 9		
-300(LF)	2×8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91			1. 16/29. 4		
-301(LF)	2×10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99			1. 36/34. 5		
-302(LF)	2×13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61			1. 66/42. 1		
-303(LF)	2×17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77			2. 06/52. 3		
-304(LF)	2×20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39			2. 36/59. 9		
-305(LF)	2×25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09			2. 86/72. 6		
-306(LF)	2×30			3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 675/1	7. 15	3. 36/85. 3		
-307(LF)	2x5			1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/2.	67	. 86/21. 8		
-308(LF)	2×7	l i		1. 460/37. 08	. 600/15. 24	. 920/23. 37	1 1	•	1. 06/26. 9		
-309(LF)	2×8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91			1. 16/29. 4		
-310(LF)	2×10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99			1. 36/34. 5		
-311(LF)	2×13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61			1. 66/42. 1		
-312(LF)	2×17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77			2. 06/52. 3		
-313(LF)	2×20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39			2. 36/59. 9		
-314(LF)	2×25		- 	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09			2. 86/72. 6		
-315(LF)	2×30		RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2	67	3. 36/85. 3		
-316(LF)	2×5		SQ	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 150/3.	81	. 86/21. 8		1
-317(LF)	2×7		1 1	1. 460/37. 08	. 600/15. 24	. 920/23. 37	1 1		1. 06/26. 9		
-318(LF)	2×8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91	1 1		1. 16/29. 4		1 :
-319(LF)	2×10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99			1. 36/34. 5		
-320(LF)	2×13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61			1. 66/42. 1		1
-311(LF)	2×17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77			2. 06/52. 3		1
-312(LF)	2×20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39			2. 36/59. 9		1
-313(LF)			$\dashv \downarrow$	3. 260/82. 80	2, 400/60, 96	2. 720/69. 09			2. 86/72. 6		
5823-313(LF)		STI	SQ	3. 760/95. 50	2, 900/73, 66	3. 220/81. 79	. 150/3.	81	3. 36/85. 3	15u'. 38u Au DVER 50u'/1. 27u Ni	

ma	t'l. co	de						rance rwise					NOTE			F		ı					
ltr	ecn	no	dr	date	;			.XX	±.01/	′.x±.	3		COP			-	ررد	'				nect.co	om
AF						linec	ır 🗔	XXX±	.005/	′.XX±	:.13	proje	ection	ı	title	HE	<u> У Г</u>				1/15	-	
							.x	xxx±.	0020/	'.XXX:	±.051	4) r	$\overline{}$, 🗆 🗀	ADI		. 🗘	010	'NIC		\
						angl	es		0°±2	2 °		7	ァュ	7	SE.	Α,	HUI	₹5E	., Ի	KIGF	۱۱.	ANG	iLE
						dr	J. S	HREI	NER	1/1	6/90	INC	CH/I	мм		ıct fa	,	QU	ICKIE			code	,
						engr	М.	SMY	(1/1	6/90		,	-	size	dwg	no					_	-
						chr	М.	SMY	(1/1	6/90	scale	Э		_		6	$ \subseteq $	323	7		shee	t
						appd	М.	SMY	(1/1	6/90		5:1		Α		O	$\mathcal{O}_{\mathcal{C}}$) _ ()		120	f 2'
she	et	revis	ion																				
7 ind	ех Г	sheet	t																				

3

21

³ STATUS: Released PDM: Rev:AF

All rights strictly reserved. Reproduction or issue to thi	form whatever is not permitted without written authority		
y reserved. Kep	not permitted wi	Copyright FCI	
All rights strictl	form whatever is	Property of FCI. Copyright FCI.	В

					1	2									3			4
	SIZE	LATCHE NOTE :		PIN SHAPE	DIM A	DIM B	DIM C	DIM	D	DIM E	TERMINAL NOTE		STY	LE				
65823-325 (LF)	2×5	LP		RND	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/2	. 67	. 86/21. 8	15u* /. 38u Au DVE	R 50u²/1. 27u Ni	-	<u>, </u>				
-326 (LF)	2×7	1		t	1. 460/37. 08	. 600/15. 24	. 920/23, 37		f	1. 06/26. 9		†	(\equiv				
-327 (LF)	2×8				1. 560/39. 62	. 700/17. 78	1. 020/25. 91			1. 16/29. 4			1	,				
-328 (LF)	2×10				1. 760/44. 70	. 900/22. 86	1. 220/30. 99			1. 36/34. 5			1					
-329 (LF)	2×13				2. 060/52. 32	1. 200/30. 48	1, 520/38, 61			1. 66/42. 1								
-330 (LF)	2×17				2. 460/62. 48	1. 600/40. 64	1. 920/48. 77			2. 06/52. 3								
-331 (LF)	2×20				2. 760/70. 10	1. 900/48. 26	2. 220/56. 39			2. 36/59. 9								
-332 (LF)	2×25				3. 260/82. 80	2. 400/60. 96	2. 720/69. 09			2. 86/72. 6								
-333 (LF)	2×30		一		3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2	. 67	3. 36/85. 3			1	,				
-334 (LF)	2x5		一		1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 150/3	. 81	. 86/21. 8			1	_				
-335 (LF)	2×7		T		1. 460/37. 08	. 600/15. 24	. 920/23. 37		f	1. 06/26. 9			(;				
-336 (LF)	2×8		\neg		1. 560/39. 62	. 700/17. 78	1. 020/25. 91			1. 16/29. 4			1	,				
-337 (LF)	2×10		T		1. 760/44. 70	. 900/22. 86	1. 220/30. 99			1. 36/34. 5			1					
-338 (LF)	2×13				2. 060/52. 32	1. 200/30. 48	1. 520/38. 61			1. 66/42. 1								
-339 (LF)	2×17		一		2. 460/62. 48	1. 600/40. 64	1. 920/48. 77			2. 06/52. 3								
-340 (LF)	2×20		一		2. 760/70. 10	1. 900/48. 26	2. 220/56. 39			2. 36/59. 9								
-341 (LF)	2×25			,	3, 260/82, 80	2. 400/60. 96	2. 720/69. 09			2. 86/72. 6								
-342 (LF)	2×30			RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 150/3	. 81	3. 36/85. 3			1	5				
-343 (LF)	2×5		一	SQ	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 675/1	7. 15	. 86/21. 8			1	$\overline{}$				
-344 (LF)	2×7			f	1. 460/37. 08	. 600/15. 24	. 920/23. 37		t	1. 06/26. 9			-	\equiv				
-345 (LF)	2×8				1. 560/39. 62	. 700/17. 78	1. 020/25. 91			1. 16/29. 4			1	,				
-346 (LF)	2×10		一		1. 760/44. 70	. 900/22. 86	1. 220/30. 99			1. 36/34. 5			1					
-347 (LF)	2×13				2. 060/52. 32	1. 200/30. 48	1. 520/38. 61			1. 66/42. 1								
-348 (LF)	2×17				2. 460/62. 48	1. 600/40. 64	1. 920/48. 77			2. 06/52. 3								
-349 (LF)	2×20		一		2, 760/70, 10	1. 900/48. 26	2. 220/56. 39			2. 36/59. 9								
-350 (LF)	2×25		T		3. 260/82. 80	2. 400/60. 96	2. 720/69. 09			2. 86/72. 6		,						
-351 (LF)	2×30	LP		SQ	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 675/1	7. 15	3. 36/85. 3	15u* /. 38u Au DVE	R 50u*/1. 27u Ni						
-352 (LF)		66258		RND	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	. 105/2	. 67	2. 86/72. 6	30u* /. 76u Au DVE	R 50u*/1. 27u Ni	i	5				
-353 (LF)	2×7	ND	\neg	t	1. 460/37. 08	. 600/15. 24	. 920/23. 37		t	1. 06/26. 9		†		\exists	*			
-354 (LF)	2×8	t			1. 560/39. 62	. 700/17. 78	1. 020/25. 91			1. 16/29. 4			1	,	*			
-355 (LF)	2×10		\neg		1. 760/44. 70	. 900/22. 86	1. 220/30. 99			1. 36/34. 5			1		*			
-356 (LF)	2×13		\neg		2. 060/52. 32	1. 200/30. 48	1. 520/38. 61			1. 66/42. 1				\neg	*			
-357 (LF)	2×17				2, 460/62, 48	1. 600/40. 64	1. 920/48. 77			2. 06/52. 3					*			
-358 (LF)	2×20		\neg		2. 760/70. 10	1. 900/48. 26	2. 220/56. 39			2. 36/59. 9				\neg	*	*CUSTOMER SPEC	CIAL	
-359 (LF)	2×25		\dashv	\neg	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09			2. 86/72. 6				\Box	*			
65823-360 (LF)	2×30	ND		RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2	. 67	3. 36/85. 3	30u* /. 76u Au 🛛 VE	R 50u²/1. 27u Ni	1	,	*			
	-		•							mat'i								

	ma	t'l. c	ode					erance erwise					STON			F	<u>C)</u>)					
	ltr	ecn	no	dr	date			.XX:	±.01/	′.x±.	3	,	COP								fcicon		om
	AF					linec	r 🗆	.XXX±	.005	′.XX±	.13	proje	ection	1	title	чЕ	<u> </u>		$\overline{}$		KIE	-	
							Ţ.x	XXX±.	0020/	'.XXX	Ŀ.051	4) r	=		, П 🗆	AU.	EK,	_ ~	OIC	'NIC	• • • • •	. –
						angl	es		0°±	2°		7	ケマ	7	SE	Α,	HOI	RSE	_, ⊦	KIGF	HT .	ANC	iLE
						dr	J. :	SHREIN	NER	1/1	6/90	INC	CH/I			uct fa		QL	JICKIE			code	,
						engr	М.	SMYK	(1/1	6/90		,	-	size	dwg	no					-	-
						chr	М.	SMYK		1/1	6/90	scal	Э		_		6	58	20	7		shee	t
						appd	М.	SMYK		1/1	6/90		5:1		Α		O	$\mathcal{I}_{\mathcal{L}}$) _ \	J		13 0	f 21
	she	et	revis	ion																			
21	ind	ex	shee	t																			

PDM: Rev:AF ³ STATUS: Released Printed: Aug 23, 2008

g.	÷		
All rights strictly reserved. Reproduction or issue to third parties in an	form whatever is not permitted without written authority from the proprie		
ŝ	ā		
ž	ş		
ğ.	Po		
Ė	4		
₹	£		
8	ē		
3	ŧ		
SS	8		
6	ten		
۶	Ē		
Ē			
폴	ş		
Š	ŧ		
2	≱	2	
	å	+	
ġ	Ŧ	동	
٤	٤	Ē	
Š	ä	ğ	
Ξ	t	ŭ	
₽	Č		
'n	_	\ddot{z}	
ŧ	ŗ		
Ņ	š	Ò	
Š	臣	÷	-
Ē	*	ě	
=	ŧ	Property of FCI. Copyright FCI.	
⋖	ű	ď	
	-		

		212	ZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLI
65823	-361(LF)	2×:	5	ND	RND	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/2. 6	7 . 86/21. 8	30u"/. 76u Au OVER 50u"/1. 27u Ni	A
1 -	-362(LF)	1		ND	RND	1	T t	1	1	•	30u*/. 76u Au OVER 50u*/1. 27u Ni	В
-	-363(LF)			ND	RND						15"/. 38u Au OVER 50u"/1. 27u Ni	1
-	-364(LF)			ND	RND						30u°/.76u GXT/GOLD FLASH	
-	-365(LF)			ND	SQ						150u²/3.81u Sn	
-	-366(LF)			STD	RND						30u"/. 76u Au OVER 50u"/1. 27u Ni	
Τ.	-367(LF)			STD	RND						15"/. 38u Au OVER 50u"/1. 27u Ni	
-	-368(LF)			STD	RND						30u°/.76u GXT/GOLD FLASH	
-	-369(LF)			STD	SQ						150u°/3. 81u Sn	
Π-	-370(LF)			LP	RND						30u*/. 76u Au EVER 50u*/1. 27u Ni	
T -	-371 (LF)			LP	RND						15"/. 38u Au OVER 50u"/1. 27u Ni	
Π-	-372(LF)			LP	RND				105 (2, 67		30u°/.76u GXT/GOLD FLASH	\top
٦.	-373(LF)	П	T	LP	SQ				. 105/2. 67		150u° / 3. 81u Sn	
٦.	-374(LF)			NO	RND				. 150/3. 8	1	30u"/. 76u Au DVER 50u"/1. 27u Ni	
Τ-	-375(LF)			ND	RND				1		15"/. 38u Au OVER 50u"/1. 27u Ni	\top
-	-376(LF)	П	T	ND	RND						30u°/. 76u GXT/GOLD FLASH	
١.	-377(LF)			NO	SQ						150u² /3. 81u Sn	
Τ-	-378(LF)		T	DTS	RND						30u"/. 76u Au DVER 50u"/1. 27u Ni	\top
Τ-	-379(LF)		T	STD	RND						15"/. 38u Au OVER 50u"/1. 27u Ni	\top
٠	-380(LF)			STD	RND						30u° /. 76u GXT/GOLD FLASH	
Т-	-381 (LF)		T	TZ	SQ						150u² /3. 81u Sn	\top
Τ-	-382(LF)		T	LP	RND						30u" /. 76u Au OVER 50u" / 1. 27u Ni	\top
١.	-383(LF)			LP	RND						15"/. 38u Au OVER 50u"/1. 27u Ni	
Τ-	-384(LF)			LP	RND				ļ .		30u°/. 76u GXT/GOLD FLASH	\top
Τ-	-385(LF)		T	LP	SQ				150/3.8	1	150u² /3. 81u Sn	\top
-	-386(LF)	П	T	ND	SQ				. 675/17.	15	30u' /. 76u Au DVER 50u' /1. 27u Ni	
-	-387 (LF)			ND	1				1		15"/. 38u Au OVER 50u"/1. 27u Ni	
Τ-	-388(LF)		T	ND							30u"/. 76u GXT/GOLD FLASH	\top
Τ-	-389(LF)			ND							150u* /3. 81u Sn	\top
-	-390(LF)			STD							30u"/. 76u Au DVER 50u"/1. 27u Ni	
-	-391 (LF)	\sqcap		DTS							15"/. 38u Au DVER 50u"/1. 27u Ni	\top
Τ-	-392 (LF)		T	STD							30u"/. 76u GXT/GOLD FLASH	\top
-	-393(LF)	Ħ		STD							150u" /3. 81u Sn	
_	-394(LF)	\sqcap	\dashv	LP							30u" /. 76u Au DVER 50u" / 1. 27u Ni	11
٠.	-395(LF)	П	T	LP	 	1 1		ļ .	1 1	1 1	15"/. 38u Au OVER 50u"/1. 27u Ni	+
65823-	-396 (LF)	2x!	5	LP	SQ	1, 260/32, 00	. 400/10, 16	720/18, 29	675/17.	15 . 86/21. 8	30u"/. 76u GXT/GDLD FLASH	В

*CUSTOMER SPECIAL

mat	t'l. co	de						rance rwise				1	STON			FC							
ltr	ecn	no	dr	date	!			.XX	±.01/	′.X±.	3	l '	COP	ī		=	IJ			www.	fcicon	nect.c	om
AF						linec	ır 🗔	XXX±	.005/	′.XX±	:.13	proje	ection	1	title	L	ΛD	FD.	\cap		KIE	•	
							.x	ΚΧΧ±.	0020/	'.XXX:	±.051	4	7 -	1	٦								,
						angl	es		0°±	2°		7	ケュ	7)SE	Α,	HUI	72F	., r	KIGI	 	ANC) LE
						dr	J. S	HREI	NER	1/1	6/90	INC	CH/I	мм		uct fa		QL	IICKIE			code	,
						engr	М.	SMY	(1/1	6/90	-		-	size	dwg	no					-	-
						chr	М.	SMY	(1/1	6/90	scal			۱,		6	58	30	7		shee	ŧ
						appd	М.	SMY	(1/1	6/90		<u>5:1</u>		Α		0) _ \	J		140	f 21
she	et	revis	ion																				
inde	ex	sheet	t																				

	Į	"
	_	
שני בולגונה היו ורביל בפתב אבתי שבלו מתרבותו מו והפתב כם בווות ליתו בולגו	form whatever is not permitted without written authority from the proprietor.	Property of FCI. Copyright FCI.

		SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
658	23-397(LF)	2×5	LP	SQ	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 675/17. 15	. 86/21. 8	150u²/3.81u Sn	В
1	-398(LF)	2×10	66258-001	RND	1. 760/44. 70	. 900/22. 86	1. 220/30. 99	. 105/2. 67	1. 36/34. 5	30u" /. 76u Au OVER 50u" / 1. 27u Ni	D
	-399(LF)	2×5	ND	SQ	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/2. 67	. 86/21. 8	15u"/. 38u Au DVER 50u"/1. 27u Ni	A
	-400(LF)		DTS		İ	ļ t		. 105/2. 67	<u> </u>	†	<u>i_</u>
	-401(LF)		LP					. 105/2. 67			
	-402(LF)		ND					. 150/3. 81			
	-403(LF)		DTS					. 150/3. 81			
	-404(LF)		LP					. 150/3. 81			A
	-405(LF)		ND					. 105/2. 67			В
	-406(LF)		STD					. 105/2. 67			
	-407(LF)		LP					. 105/2. 67			
	-408(LF)		ND					. 150/3. 81			
П	-409(LF)		STD		I I			. 150/3. 81	1 .		\Box
	-410(LF)	2x5	LP		1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 150/3. 81	. 86/21. 8		В
	-411(LF)	2×7	ND		1. 460/37. 08	. 600/15. 24	. 920/23. 37	. 105/2. 67	1. 06/26. 9		С
	-412(LF)	1	STD		T t	t	1	. 105/2. 67	T t		
	-413(LF)		LP					. 105/2. 67			
	-414(LF)		ND					. 150/3. 81			
	-415(LF)		DTS		1			. 150/3. 81	į į		
	-416(LF)	2×7	LP		1. 460/37. 08	. 600/15. 24	. 920/23. 37	. 150/3. 81	1. 06/26. 9		Ċ
	-417(LF)	2×8	ND		1. 560/39. 62	. 700/17. 78	1. 020/25. 91	. 105/2. 67	1. 16/29. 4		D
	-418(LF)	1	STD		t	t	1	. 105/2. 67	t		
	-419(LF)		LP					. 105/2. 67			
Î	-420(LF)		ND					. 150/3. 81			
	-421(LF)		STD		1	1		. 150/3. 81			
	-422(LF)	2×8	LP		1. 560/39. 62	. 700/17. 78	1. 020/25. 91	. 150/3. 81	1. 16/29. 4		
	-423(LF)	2×10	NO		1. 760/44. 70	. 900/22. 86	1. 220/30. 99	. 105/2. 67	1. 36/34. 5		
	-424(LF)	1	QT2		l t	t	1	. 105/2. 67	† †		
П	-425(LF)		LP					. 105/2. 67			
	-426(LF)		ND					. 150/3. 81			
	-427(LF)		STD					. 150/3. 81			
	-428(LF)	2×10	LP		1. 760/44. 70	. 900/22. 86	1. 220/30. 99	. 150/3. 81	1. 36/34. 5		\top
	-429(LF)	2×13	ND		2. 060/52. 32	1. 200/30. 48	1. 520/38. 61	. 105/2. 67	1. 66/42. 1		
	-430(LF)		STD		1 1	1		. 105/2. 67	1		
	-431(LF)		LP				1	. 105/2. 67	1 1		\top
658	323-432(LF)	2×13	ND	SQ	2. 060/52. 32	1. 200/30. 48	1. 520/38. 61	. 150/3. 81	1. 66/42. 1	15u"/. 38u Au DVER 50u"/1. 27u Ni	D

	mat	'l. co	de					rance rwise						/ER		<u>FC</u>							
[ltr	ecn	no	dr	date			.XX:	±.01,	/.X±.	3		COP									nect.co	om
	AF					lined		XXX±				proje	ection +	1	title	HE	ADI	ER,	Q	UIC	KIE		
[angl	es		0°±	2 °		7	アュ	7	2F	A, I		72F	., Ի	RIGH	11	ANC	
[dr	J. S	HREI	NER	1/1	6/90	INC	CH/I			ıct far		QU	ICKIE			code	;
						engr	М.	SMYK	(1/1	6/90		,,,,	-	size	dwg	no					-	-
						chr	М.	SMYK	(1/1	6/90				ا ۸ ا		6	58	? ? ·	7		shee	t
						appd	М.	SMYK	(1/1	6/90		<u>5:1</u>		Α		O	$\mathcal{I}_{\mathcal{L}}$) _ \	<u>ر</u>		15 0	f 21
	she	et	revis	ion																			
21	inde	ex	shee	t																			

PDM: Rev:AF 3 STATUS: Released Printed: Aug 23, 2008

n or issue to third parties	itten authority from the pri			
All rights strictly reserved, Reproduction or issue to third parties	form whatever is not permitted without written authority from the pri	Property of FCI. Copyright FCI.	В	

	SIZ	-	TCHES TE 7	P I SHA		DIM	I A	DIM	В	DIM	ı C	DIM	D	DIM	E	TEI	RMINAL NOTE	. PLATING E 12	тг	TYLE
65823-433(LF)	2×1	3	STD	S	Q	2. 060/	52. 32	1. 200/3	80. 48	1. 520/	38. 61	. 150/:	3. 81	1. 66/4	2. 1	15u " /. 38u	Au OV	ER 50u*/1. 27u Ni		D
-434(LF)	2×1	3	LP			2. 060/	52. 32	1. 200/3	80. 48	1. 520/	38. 61	. 150/3	3. 81	1. 66/4	2. 1		1			Ĺ
-435(LF)	2×1	7	ND			2. 460/	62. 48	1. 600/4	10. 64	1. 920/	48. 77	. 105/2	2. 67	2. 06/5	2. 3					\perp
-436(LF)	1		DTS				•	1			Ì	. 105/2	2. 67	,	1					
-437(LF)			LP									. 105/2	2. 67							
-438(LF)			ND									. 150/3	3. 81							Ι
-439(LF)	\dashv		QT2				,	1			ļ	. 150/3	3. 81	,	ļ					Т
-440(LF)	2×1	7	LP			2. 460/	62. 48	1. 600/4	10. 64	1. 920/	48. 77	. 150/3	3. 81	2. 06/5	2. 3					T
-441(LF)	2×2	0	ND			2. 760/	70. 10	1. 900/4	8. 26	2. 220/	56. 39	. 105/8	2. 67	2. 36/5	9. 9					
-442(LF)	1	:	QT2			,	1	1			Ì	. 105/2	2. 67	1	1					Т
-443(LF)			LP									. 105/2	2. 67							T
-444(LF)			ND									. 150/3	3. 81				Ī			T
-445(LF)	\dashv		STD			,		,			ļ	. 150/3	3. 81							T
-446(LF)	2×2	0	LP			2. 760/	70. 10	1. 900/4	18. 26	2. 220/	56. 39	. 150/3	3. 81	2. 36/5	9. 9					T
-447(LF)	2×2	5	ND			3. 260/	82. 80	2. 400/6	50. 96	2. 720/	69. 09	. 105/2	2. 67	2. 86/7	2. 6					T
-448(LF)	1		STD			,	1	t			t	. 105/2	2. 67		t				1	\top
-449(LF)	\top		LP									. 105/2	2. 67						1	\top
-450(LF)	Ħ		ND									. 150/:	3. 81							T
-451(LF)	\dashv		CTS			,						. 150/3	3. 81						1	\top
-452(LF)	2×2	5	LP			3. 260/	82. 80	2. 400/6	50. 96	2. 720/	69. 09	. 150/3	3. 81	2. 86/7	2. 6					T
-453(LF)	2×3	0	ND			3. 760/	95. 50	2. 900/7	'3. 66	3. 220/	81. 79	. 105/2	2. 67	3. 36/8	5. 3				1	十
-454(LF)	1		STD			,	1	t			t	. 105/2	2. 67		t					\top
-455(LF)			LP									. 105/2	2. 67				t		1	十
-456(LF)			ND									. 150/3	3. 81				t		1	\top
-457(LF)			STD									. 150/3							+	+
-458(LF)	2×3	0	LP	 S	Q.	3, 760/	95. 50	2, 900/7	'3. 66	3, 220/	81. 79	. 150/3		3, 36/8	5. 3				+	+
-459(LF)	2×1	_	ND NO	RN	_	1. 960/		1, 100/2		1. 420/		. 105/2		1, 56/3					+	+
-460(LF)	1		STD					1			1				f				+	+
-461(LF)		_	LP													15u* /. 38u	Au DVE	ER 50u²/1. 27u Ni	+	+
-462(LF)			ND															ER 50u²/1, 27u Ni	-	+
-463(LF)		_	STD															ER 50u*/1, 27u Ni	+	+
-464(LF)	\vdash	_	LP															ER 50u*/1, 27u Ni	+	+
-465(LF)	+	_	ND NO													30u* /. 76u			+	+
-466(LF)	\vdash	_	STD													30u* /. 76u			+	+
-468(LF)		_	LP	RI	ND.						 				-	30u* /. 76u			+	+
65823-468(LF)	2×1	_	ND N	<u></u>		1. 960/	49 8N	1, 100/2	7 94	1, 420/	1 36 N7	. 105/2	67	1. 56/3	9.6			3. 81u Sn	+	D

	mat	'l. co	ode						rance rwise		less cified			STON			F	訓						
	ltr	ecn	no	dr	date				.XX	±.01,	/.X±.											fcicon		om
	AF					l	linea	r <u> </u>	XXX±	.005	/.XX±	.13	proje	ection	1	title	НЕ	ΔD	FR	\cap		KIE		
							.XXXX±.0020/.XXX±.051 angles 0°±2°				4	7 4	:1		, ' ' -					171	^	\		
							angle	es		0°±	2*		7	7 -	7	٦٥			75E	., r	RIGE	<u> 11 </u>	ANC	3LE
							dr	J. S	HREI	NER	1/10	6/90	INC	CH/I	мм	produ	ıct fa	mily	QU	ICKIE			code	;
						6	engr	М.	SMY	(1/10	6/90			-	size	dwg	no					_	-
							chr	М.	SMY	(1/10	6/90	scal	•		١, ١		6	58	20	7		shee	ŧt
							ppdc	М.	SMY	(1/10	6/90		<u>5:1</u>		Α		O	$\mathcal{I}_{\mathcal{L}}$) _ \	<u>ر</u>		160	f 21
	shee	et	revis	ion																				
21	inde	×	shee	t																				
	2					F	PD	M:	Re	:v:/	٩F	3	STA	TUS	:Re	elea	ase	d	Pri	nted:	Aug	23,	200	4

3

All rights strictly reserved. Reproduction on issue to third por from whatever is not permitted without written authority from Property of FCI. Copyright FCI.

	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
55823-469(LF)	2×12	QT2	SQ	1. 960/49. 80	1. 100/27. 94	1. 420/36. 07	. 105/2. 67	1. 56/39. 62	150u² /3. 81u TIN	D
-470(LF)	1 1	LP	SQ	1 1		1	. 105/2. 67	İ	150u²/3. 81u TIN	
-471(LF)		ND	RND				. 150/3. 81		15u"/. 38u Au DVER 50u"/1. 27u Ni	
-472(LF)		QT2					1		15u'/. 38u Au OVER 50u'/1. 27u Ni	
-473(LF)		LP							15u'/. 38u Au OVER 50u'/1. 27u Ni	
-474(LF)		ND							30u*/. 76u Au OVER 50u*/1. 27u Ni	
-475(LF)		QT2							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-476(LF)		LP							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-477(LF)		ND							30u°/.76u GXT/GOLD FLASH	
-478(LF)		QT2							30u*/. 76u GXT/GDLD FLASH	
-479(LF)		LP	RND						30u'/. 76u GXT/GDLD FLASH	
-480(LF)		ND	SQ						150u²/3. 81u TIN	
-481(LF)		QT2							150u²/3.81u TIN	
-482(LF)		LP					. 150/3. 81		150u"/3. 81u TIN	
-483(LF)		ND					. 105/2. 67		15u"/. 38u Au OVER 50u"/1. 27u Ni	
-484(LF)		QT2							15u'/. 38u Au OVER 50u'/1. 27u Ni	
-485(LF)		LP							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-486(LF)		ND							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-487(LF)		DTS							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-488(LF)		LP							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-489(LF)		ND							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-490(LF)		QT2					,		15u'/. 38u Au OVER 50u'/1. 27u Ni	
-491(LF)		LP					. 105/2. 67		15u"/. 38u Au OVER 50u"/1. 27u Ni	
-492(LF)		ND					. 675/17. 15		15u"/. 38u Au OVER 50u"/1. 27u Ni	
-493(LF)		QT2							15u'/. 38u Au OVER 50u'/1. 27u Ni	
-494(LF)		LP							15u'/. 38u Au DVER 50u'/1. 27u Ni	
-495(LF)		ND							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-496(LF)		STD							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-497(LF)		LP							30u'/. 76u Au OVER 50u'/1. 27u Ni	
-498(LF)		ND							30u'/. 76u GXT/GOLD FLASH	
-499(LF)		STD							30u°/. 76u GXT/GOLD FLASH	
-500(LF)		LP							30u*/. 76u GXT/GOLD FLASH	
-501(LF)		ND							150u" /3. 81u TIN	
-502(LF)		STD							150u"/3. 81u TIN	
-503(LF)	2×12	LP	SQ	1. 960/49. 80	1. 100/27. 94	1. 420/36. 07	. 675/17. 15	1. 56/39. 62	150u"/3. 81u TIN	
55823-504(LF)	2×15	ND.	RND	2. 260/57. 40	1, 400/35, 56	1, 720/43, 69	. 105/2. 67	1, 86/47, 24	15u"/. 38u Au OVER 50u"/1. 27u Ni	D

	mat	'l. co	de					erance erwise			l			/ER		FC							
[ltr	ecn	no	dr	date			.XX:	±.01,	/.X±.	3		OP									nect.c	om
	AF					lined	_	XXX±				l' '.	ction	1 /	title	HE	ADI	ER,	Q	UIC	KIE	-	
İ						angl	es		0°±	2*		-{	ナモ	\Rightarrow	SE.	A, I	HOF	RSE	., F	RIGH	łΤ	ANC	GLE
[dr	J. :	SHREII	NER	1/1	6/90	INC	CH/I			ıct far		QU	ICKIE			code	•
[engr	М.	SMY	(1/1	6/90		,,,,,	-	size	dwg	no					-	-
[chr	М.	SMY	(1/1	6/90	scale	•		ا ۸ ا		6	58	? O .	7		shee	et
						appd	М.	SMY	(1/1	6/90		<u>5:1</u>		[A]		O	$\mathcal{I}_{\mathcal{L}}$) _ \)		170	f 21
	she	et	revis	ion																			
21	inde	x	shee	t																			

PDM: Rev:AF ³ STATUS: Released Printed: Aug 23, 2008

Property of FCI. Copyright FCI.
form whatever is not permitted without written authority from the
All rights strictly reserved. Reproduction or issue to third parti

	SIZE	LATCHES NOTE 7	PIN SHAPE	ים ב	M A	DIM B	DIM	С	DIM	ם	DIM E	TERMINAL PLATING N□TE 12	STY
5823-505(LF)	2×15	STD	RND	2. 260	/57. 40	1. 400/35. 56	1. 720/	43. 69	. 105/2	. 67	1. 86/47. 2	15u'/. 38u Au OVER 50u'/1. 27u Ni	1
-506(LF)	1	LP	1 1			l i					i	15u'/. 38u Au OVER 50u'/1. 27u Ni	
-507(LF)		ND										30u" /. 76u Au OVER 50u" /1. 27u Ni	
-508(LF)		STD										30u" /. 76u Au EVER 50u" / 1. 27u Ni	
-509(LF)		LP										30u"/. 76u Au EVER 50u"/1. 27u Ni	
-510(LF)		ND										30u'/. 76u GXT GOLD FLASH	
-511(LF)		STD										30u*/.76u GXT GOLD FLASH	
-512(LF)		LP	RND									30u*/.76u GXT GOLD FLASH	
-513(LF)		ND	SQ									150u²/3. 81u TIN	
-514(LF)		TZ	SQ									150u²/3. 81u TIN	
-515(LF)		LP	SQ						. 105/2	. 67		150u²/3. 81u TIN	
-516(LF)		ND	RND						. 150/3	. 81		15u'/. 38u Au OVER 50u'/1. 27u Ni	
-517(LF)		STD							1			15u*/. 38u Au OVER 50u*/1. 27u Ni	
-518(LF)		LP										15u*/. 38u Au OVER 50u*/1. 27u Ni	
-519(LF)		ND										30u"/. 76u Au DVER 50u"/1. 27u Ni	
-520(LF)		STD										30u"/. 76u Au DVER 50u"/1. 27u Ni	
-521 (LF)		LP										30u*/. 76u Au OVER 50u*/1. 27u Ni	
-522(LF)		ND										30u'/. 76u GXT GOLD FLASH	
-523(LF)		STD										30u°/. 76u GXT GOLD FLASH	
-524(LF)		LP	RND									30u'/. 76u GXT GOLD FLASH	
-525(LF)		ND	SQ									150u"/3. 81u TIN	1
-526(LF)		STD	1 1									150u*/3.81u TIN	
-527(LF)		LP							. 150/3	. 81		150u*/3.81u TIN	
-528(LF)		ND							. 105/2	. 67		15u'/. 38u Au DVER 50u'/1. 27u Ni	1
-529(LF)		STD							1 1			15u'/. 38u Au DVER 50u'/1. 27u Ni	
-530(LF)		LP										15u"/. 38u Au OVER 50u"/1. 27u Ni	\top
-531 (LF)		ND										30u"/. 76u Au OVER 50u"/1. 27u Ni	1
-532(LF)		STD							1 1			30u"/. 76u Au OVER 50u"/1. 27u Ni	\top
-533(LF)		LP							. 105/2	. 67		30u"/. 76u Au DVER 50u"/1. 27u Ni	1
-534(LF)		ND							. 150/3	. 81		15u"/. 38u Au OVER 50u"/1. 27u Ni	\top
-535(LF)		QT2							. 150/3	. 81		15u"/. 38u Au OVER 50u"/1. 27u Ni	1
-536(LF)		LP							. 150/3	. 81		15u"/. 38u Au DVER 50u"/1. 27u Ni	1
-537(LF)		ND							. 675/1	7. 15		15u"/. 38u Au DVER 50u"/1. 27u Ni	\top
-538(LF)		STD							1 1			15u"/. 38u Au DVER 50u"/1. 27u Ni	\top
-539(LF)		LP			1		1 1		1 1		1 1	15u"/. 38u Au DVER 50u"/1. 27u Ni	\top
323-540(LF)	2×15	ND	SQ	2, 260	/57. 40	1, 400/35, 56	1. 720/	43 69	. 675/1	7 15	1, 86/47, 2	30u*/. 76u Au DVER 50u*/1. 27u Ni	

	mat	'l. co	de					erance erwise			l		STON			FÇ	<u>]</u>						
	ltr	ecn	no	dr	date			.XX:	±.01,	/.X±.	3		COP									nect.c	om
	AF					linec	ır 🗌	.xxx±	.005	/.XX±	:.13	proje	ection	1	title	HE	۷Di	- D	\cap		VIE	•	
	.XXXX±.		0020	'.XXX:	±.051	4	7 4	1		, II	701	_1/,			IT I	^ \ \ / C	ᆡ						
						angl	es		0°±	2°		7	<i>y</i> '	7_	2F	A, I	101	72F	., ෦	KIGF	11	ANC	2LE
					6/90	INC	CH/I			ıct fan		QU	ICKIE			code	•						
						engr	М.	SMY	(1/1	6/90			_	size	dwg	no					_	-
						chr	М.	SMY	<u> </u>	1/1	6/90				ا ۸ ا		6	58	30	7		shee	et
						appd	М.	SMY	<u> </u>	1/1	6/90		<u>5:1</u>		Α		<u> </u>		\	J		18 0	f 21
	she	et	revis	ion																			
21	inde	ex	shee	t																			

PDM: Rev:AF ³ STATUS: Released

or issue to third i	ten authority fro			
Ail rights strictly reserved. Reproduction of issue to third	form whatever is not permitted without written authority from	Copyright FCI.		
ALL PIGNTS STRICTL	form whatever is p	Property of FCI. Copyright FCI.	В	

	SIZE 2×15	LATCHES NOTE 7 STD LP	PIN SHAPE	DI	ма											
-542(LF) -543(LF) -544(LF)	2×15		SQ			DIM	В	וום	4 C	DIM	D	DIM	Ε	TERMINAL PLATING NOTE 12	'T2	YLE
-543(LF) -544(LF)		LP		2. 260	F5 7, 40	1. 400/	/35. 56	1. 720/	48L 69	. 675/	17. 15	1. 86/4	7. 2	L370u" /. 76u Au OVER 50u" / 1. 27u Ni		D
-544(LF)														30u" /. 76u Au OVER 50u" / 1. 27u Ni		
\vdash		ND												30u'/. 76u GXT/GOLD FLASH		
-545(LF)		STD												30u"/. 76u GXT/GOLD FLASH		
		LP												30u°/.76u GXT/GOLD FLASH		
-546(LF)		ND												150u²/3. 81u TIN		
-547(LF)		QT2												150u²/3. 81u TIN		
-548(LF)	2×15	LP	SQ	2. 260.	/57. 40	1. 400/	/35. 56	1. 720/	43. 69	. 675/	17. 15	1. 86/4	7. 2	150u²/3. 81u TIN		
-549(LF)	2×22	ND	RND	2. 960	/75. 20	2. 100/	/53. 34	2. 420/	61. 47	. 105/	2. 67	2. 56/6	5. 0	15u"/. 38u Au DVER 50u"/1. 27u Ni		
-550(LF)		QT2					*							15u"/. 38u Au DVER 50u"/1. 27u Ni		
-551(LF)		LP												15u"/. 38u Au OVER 50u"/1. 27u Ni		
-552(LF)		ND												30u"/. 76u Au DVER 50u"/1. 27u Ni		
-553(LF)		STD												30u"/. 76u Au DVER 50u"/1. 27u Ni		
-554(LF)		LP												30u"/. 76u Au DVER 50u"/1. 27u Ni		
-555(LF)		ND												30u"/.76u GXT/GDLD FLASH		
-556(LF)		QT2												30u*/. 76u GXT/GOLD FLASH		
-557(LF)		LP	RND											30u*/. 76u GXT/GOLD FLASH		
-558(LF)		ND	SQ											150u*/3.81u TIN		
-559(LF)		STD	SQ											150u*/3.81u TIN		
-560(LF)		LP	SQ							. 105/	2. 67			150u²/3.81u TIN		
-561(LF)		ND	RND							. 150/	3. 81			15u"/. 38u Au OVER 50u"/1. 27u Ni		
-562(LF)		QTZ												15u"/. 38u Au DVER 50u"/1. 27u Ni		
-563(LF)		LP												15u'/. 38u Au OVER 50u'/1. 27u Ni		$ldsymbol{ldsymbol{ldsymbol{ldsymbol{ld}}}$
-564(LF)		ND												30u"/. 76u Au OVER 50u"/1. 27u Ni		<u> </u>
-565(LF)		STD												30u"/. 76u Au OVER 50u"/1. 27u Ni		L
-566(LF)		LP												30u* /. 76u Au OVER 50u* /1. 27u Ni		
-567(LF)		ND												30u*/.76u GXT/GOLD FLASH		<u> </u>
-568(LF)		STD												30u*/.76u GXT/GOLD FLASH		
-569(LF)		LP	RND											30u"/.76u GXT/GOLD FLASH		
-570(LF)		ND	20											150u*/3.81u TIN		
-571(LF)		STD												150u²/3. 81u TIN		
-572(LF)		LP								. 150/	3. 81			150u*/3.81u TIN		
-573(LF)	\perp	ND								. 105/	2. 67			15u'/. 38u Au OVER 50u'/1. 27u Ni		$oxed{oxed}$
-574(LF)		STD												15u'/. 38u Au OVER 50u'/1. 27u Ni		$oxed{oxed}$
-575(LF)	1	LP										7		15u'/. 38u Au OVER 50u'/1. 27u Ni		
65823-576(LF)	5×55	ND	SQ	2. 960.	/75. 20	2. 100	/53. 34	2. 420/	61. 47	. 105/	2. 67	2. 56/6	5. 0	30u*/. 76u Au OVER 50u*/1. 27u Ni		D

		mat	'l. co	ode						rance rwise						/ER		F							
		ltr	ecn	no	dr	date	!			.XX:	±.01/	/.X±.	3		COPY			7	//					nect.c	om
		AF				linear .XXX±.005/.XX±.13		.13	proje	ection	١	title	HE	الا	FD.	\cap		VIE							
									.x	XXX±.	0020/	'.XXX:	±.051	4	7 4	_1	ارد	, I I	HOI		. ~		IT.	^	,
					angles 0°±2°			<i>y</i>	7 -	7) S	Α, Ι	HUI	12F	., r	KIGF	11	ANC	っしし						
								dr	J. S	SHREI	NER	1/1	6/90	INC	CH/I			ıct far		QU	ICKIE			code	;
								engr	М.	SMYK	(1/1	6/90			-	size	dwg	no					-	-
								chr	М.	SMYK	(1/1	6/90	scale	е		۱ ۸ ا		6	58	20.	7		shee	t
								appd	М.	SMYK	(1/1	6/90		<u>5:1</u>		Α		0	\mathcal{I}) <u> </u>	<u>ر</u>		190	f 21
		shee	et	revis	ion																				
2	21	inde	X	shee	t																				

PDM: Rev:AF 3 STATUS: Released

4 Printed: Aug 23, 2008

Ş	Ę			
Ę	4			
p	ě			
ž	듉			
ŭ	9			
All rights strictly reserved. Reproduction or issue to third	form whatever is not permitted without written authority fro			
5	į.			
ÿ	ţ			
Ş	ş			
Š	>	Property of FCI. Copyright FCI.		
	ţ	±		
Š	듵	ġ		
Š	ĕ	ğ		
2	ŧ	ပ		
⋛	č			
Ę	-	5		
S	Š	4		
13	ţ	ج	В	
5	ŧ	Ţ	ט	
Ξ	٤	ģ		
€	¥	Œ		

		SIZE	LATCHES NOTE 7	PIN SHAPE		DIM A	DIM	В	DII	4 C	DIM	1 D	DIM	E		TERMINAL PLATING STYLI NOTE 12			STYLE					
65	B23-577(LF)	5×55	QT2	SQ	2. 9	60/75, 18	2, 100,	/53, 34	2. 420	61. 47	. 105/	2. 67	2. 56/6	55. 0	30u* /. 7	6u Au OVER	50u*/1.2	7u Ni	D					
	-578(LF)		LP			•		1			. 105/	2. 67			30u* /. 7	6u Au □VER	50u² /1. 2	7u Ni						
	-579(LF)		ND								. 150/	′3. 81			15u*/. 38u Au DVER 5		50u² /1. 2	7u Ni						
	-580(LF)		STD								. 150/	′3. 81			15u² /. 3	Bu Au OVER	50u² /1. 2	7u Ni						
	-581(LF)		LP								. 150/	′3. 81			15u² /. 3	Bu Au OVER	50u²/1. 2	7u Ni						
	-582(LF)		ND								. 675/	17. 15			15u² /. 3	Bu Au OVER	50u*/1.2	7u Ni						
	-583(LF)		QT2									İ			15u* /. 3	Bu Au OVER	50u²/1, 2	7u Ni						
	-584(LF)		LP												15u* /. 3	Bu Au □VER	50u² /1. 2	7u Ni						
	-585(LF)		ND												30u* /. 7	6u Au OVER	50u² /1. 2	7u Ni						
	-586(LF)		QT2												30u* /. 7	6u Au OVER	50u*/1.2	7u Ni						
	-587(LF)		LP												30u* /. 7	6u Au OVER	50u*/1.2	7u Ni						
	-588(LF)		ND												300	*/. 76u GXT	/GOLD FLA	HZ						
	-589(LF)		STD						ĺ						300	*/. 76u GXT	/GOLD FLA	HZ						
	-590(LF)		LP						1						300	*/. 76u GXT	/GOLD FLA	HZ						
	-591(LF)		ND						1							150u* /3. 8	Blu TIN							
	-592(LF)		STD			ļ		l				1	Ι.			150u* /3. 8	31u TIN							
	-593(LF)	5×55	LP	SQ	2. 9	60/75. 18	2. 100	/53. 34	2. 420	61. 47	69. 09 . 105/2. 67 2.		2. 56/6	55. 0		150u* /3. 8	/3. 81u TIN							
	-594(LF)	2x25	66258	RND	3. 2	60/82. 80	2, 400,	′60. 9 6	2. 720,	69. 09			2. 86/	72. 6	30u* /. 7	6u Au OVER	50u* /1. 2	7u Ni						
	-595(LF)	2x25	66258	RND	3. 2	60/82. 80	2, 400,	⁄60. 9 6	2. 720,	69. 09			2. 86/	72. 6	30u* /. 7	6u Au OVER	50u* /1. 2	7u Ni						
	-596(LF)	2×30	STD	RND	3. 7	60/95. 50	2. 900	73. 66	3. 220,	/81. 79	. 150/	′3. 81	3. 36/8	35. 3	50u*/1. 27u Au OVER 50u*/1. 27u Ni									
	-597(LF)	2×25	ND	SQ	3. 2	60/82. 80	2. 400	⁄60. 9 6	2. 720,	69. 09	. 105/	2. 67	2. 86/	72. 6	300	*/. 76u GXT	GOLD FLASH							
	-598(LF)	2×25	STD	SQ	3. 2	60/82. 80	2, 400,	′60. 9 6	2. 720,	69. 09	. 105/	2. 67	2. 86/	72. 6	300	1/. 76u GXT	/GOLD FLA	SH						
	-599(LF)	2×25	LP	SQ	3. 2	60/82. 80	2, 400,	′60. 96	2. 720,	′69. 09	. 105/	2. 67	2. 86/	72. 6	300	*/. 76u GXT	/GOLD FLA	SH						
	-600(LF)	2×30	ND	RND	3. 7	60/95, 50	2, 900,	73. 66	3. 220,	⁄81. 79	. 150/	′3. 81	3. 36/8	35. 3	50u*/1.	27u Au OVEF	8 50u*/1. i	27u Ni						
	-601(LF)	2×30	LP	RND	3. 7	60/95, 50	2, 900,	73. 66	3. 220,	/81. 79	. 150/	′3. 81	3. 36/8	35. 3	50u*/1.	27u Au OVEF	8 50u²/1. i	27u Ni						
	-606(LF)	2×25	STD	RND	3. 2	60/82. 80	2, 400	⁄60. 9 6	2. 720	69. 09	. 105/	2. 67	2. 86/	72. 6	30u² /. 7	6u Au OVER	50u* /1. 2	7u Ni		*				
	-607(LF)	2×25	QT2	SQ	3. 2	60/82. 80	2, 400	⁄60. 96	2. 720	69. 09	. 150/	′3. 81	2. 86/	72. 6	30u* /. 7	6u Au OVER	50u* /1. 2	7u Ni	D					
65	B23-608(LF)	2×25	QTS	SQ	3. 2	60/82, 80	2, 400	⁄60. 96	2. 720	69. 09	. 105/	2. 67	2. 86/	72. 6	300	*/. 76u GXT	/GOLD FLA	SH	E					
_																								
_		1			+																			
									1				1											
									1				1											
									1				1							٦.	CUSTOMER SPEC	TAI		
									1				1							┦ ˜	COSTENER SI EC	,1HL		
		•		•	•				•		•		•						•	_				
													ſ	nat'l. c	ode			lerances			CUSTOMER	F	C)	
													- -	tr loc-	م ا م	data	Ot 1	herwise s	<u>' </u>	,	COPY			 :-t
														tr ecr AF	no dr	date	-linear		01/.X±.3 05/ XX+		projection	title	IEADED	ciconnect.com

	mat'l. code					tolerances unless otherwise specified							CUSTOMER										
	Itr ecn no dr date					.XX±.01/.X±.3					COPY						www.fciconnect.c				om		
	AF					line	⊢	.XXX±.005/.XX±.13 .XXXX±.0020/.XXX±.051				l' 1	ection	1 	title HEADER, SEA, HORSE,				Q	UIC	KIE		
						angl	es		0°±	2*					SE	Α,	HO	RSE	Ξ, F	RIGH	ΗT	ANC	GLE
						dr	J.	SHREI	NER	1/1	6/90	INC	CH/I	мм		ıct fa		QL	JICKIE			code	9
						engr		M. SMYK		1/16/90					size dwg no								_
					chr appd		-				1/16/90		4 – .		A	65823				sheet 20 of 2			
	she	neet re		ion		1-77-		T		· · ·	1		<u> </u>										
21	inde	×	shee	t																			

3

PDM: Rev:AF 3 STATUS: Released

Printed: Aug 23, 2008

	4	
;	>	
?	Jorit	
200	둫	
5	oltten.	
Ž	₹	
	without	C.
Ţ	75	Œ
الا القالم عداد المالية المالية المالية المالية المالية المالية	form whatever is not permitted without written authority f	Property of FCI. Copyright FCI.
,	ģ	ŭ
?	<u>v</u>	\ddot{c}
ī	۷	4
5	šve	ę
5	what	erty
É	form	Prop

В

				1 2					3		
	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM F	TERMINAL PLATING NOTE 12	STYLE	
65823-609 (LF)	2X5	-	RND 32.00 10.16		18.29	2.67	7.24	50u"/1.27 u Au □VER 50u"/1.27u Ni	А		
-610 (LF)	2X5	-	4	32.00	10.16	18.29	4	4	4	В	
-611 (LF)	2X7	-		37.00	15.24	23.37				С	
-612 (LF)	2X8	-		39.60	17.18	25.91				D	
-613 (LF)	2X10	-		44.70	22.86	30.99				4	
-614 (LF)	2X13	-		52.30	30.48	38.61					
-615 (LF)	2X17	-		62.40	40.64	48.77					
-616 (LF)	2X20	-		70.10	48.26	56.39					
-617 (LF)	2X25	-		82.80	60.96	69.09				1	
-618 (LF)	2X30	-		95.50	76.66	81.79				D	
-619 (LF)	2X5	STD		32.00	10.16	18.29				Α	
-620(LF)	5X2	4		32.00	10.16	18.29				В	
-621 (LF)	2X7			37.00	15.24	23.37				С	
-622(LF)	2X8			39.60	17.18	25.91				D	
-623(LF)	2X10			44.70	22.86	30.99				4	
-624(LF)	2X13			52.30	30.48	38.61					
-625(LF)	2X17			62.40	40.64	48.77					
-626(LF)	5X50			70.10	48.26	56.39					
-627(LF)	2X25			82.80	60.96	69.09	1 1	1	1		
-628(LF)	2X30	QT2	RND	95.50	76.66	81.79	2.67	7.24	50u"/1.27 u Au OVER 50u"/1.27u Ni	D	



	mat'l. code						tolerances unless otherwise specified							CUSTOMER									
	ltr	ecn	no	dr	date			.XX:	±.01/	′.x±.:	3	COPY						www.fcicon				om	
	AF		linea	r .XXX±.005/.XX±.13				projection			title HEADER,						-						
							.XXXX±.0020/.XXX±.0			±.051				ا ر ـ	, I I	HOI		. Q		- ^			
						angle	es	0°±2°				7	ケュ	7	2F	Α, Ι	HOF	72F	_, Ի	RIGHT			-LE
						dr	J. S	J. SHREINER 1/			6/90	INCH/MM				ıct far	QU	IICKIE			code		
						engr	М.	SMYK	(1/10	6/90	<u> </u>			size	dwg							
			chr	chr M. SMYK			MYK 1/16/90		scale		_ \	6582				つて			t				
						appd	М.	M. SMYK 1/			1/16/90		5:1		Α	00020				<u> </u>	ر		f 21
	sheet		revision																				
21	index		sheet																				

PDM: Rev:AF 3 STATUS: Released

Printed: Aug 23, 2008