


PRODUCT NUMBER	TAIL LENGTH		MATING LENGTH		SPECIAL				LF OPTION	
	DIM F	DIM F	DIM G	DIM G	DIM H	DIM H	POLARIZED	RETENTION		
	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	POSITION	NOTES		
79280-YYY	0.450	11.43	0.120	3.05	0.230	5.84	2		PACKAGING POLY BAGS/TUBES	NOTES 6,7
79290-YYY	0.538	13.67	0.120	3.05	0.318	8.08	2		POLY BAGS	
87080-105	0.450	11.43	0.120	3.05	0.230	5.84	2 AND 4	5	1-3-5	



NOTE:

- FOR PRODUCT GEOMETRY AND GENERAL INFORMATION SEE DRAWINGS 93197 AND 93196.
- ANY NUMBER OF POSITIONS FROM 3 THRU 36. (SEE NOTE 5 AND TABLE FOR EXCEPTIONS).

XXXX-YYYHTLF

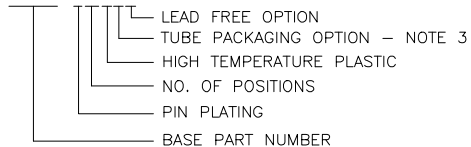

- PART NUMBERS FOLLOWED BY A "T" ARE PACKAGED IN TUBES. SEE SPECIFIC PART NUMBERS FOR AVAILABILITY.
- DETAIL N DIMENSIONS APPLY TO 3 POSITION PARTS ONLY.
- AVAILABLE AS -105 ONLY.
- ADD "HLF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
- THESE PRODUCTS MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- PLATING OPTION:
MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.
- PART NUMBERS WITH "H" SUFFIX WILL WITHSTAND EXPOSURE TO 260° C PEAK TEMPERATURE FOR 20 SECONDS IN WAVE SOLDER, INFRA-RED OR VAPOR PHASE SOLDER PROCESS. PART NUMBERS WITHOUT "H" SUFFIX WILL WITHSTAND EXPOSURE TO 260° C PEAK TEMPERATURE FOR WAVE SOLDER PROCESS.
- BODY MATERIAL:
PCT, GLASS FIBER REINFORCED, FLAME RETARDENT PER UL-94V-0. COLOR: BLACK. OR MINERAL FILLED LCP FLAME RETARDENT PER UL-94V-0. COLOR BLACK

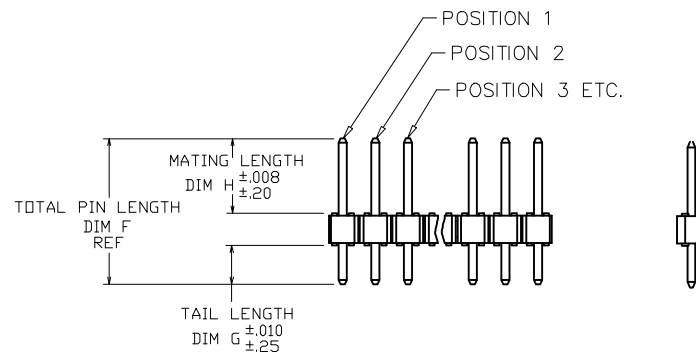

mat'l. code	NOTE 4	surface ISO 1302	tolerance ISO 406 ISO 1101	projection	product family BERGSTIK
ltr	ecn no	dr	date	INCH/MM	title
H	v41576	HTB	10/25/94	linear	BERGSTIK® II HEADER
J	v71637	HTB	1/04/97	linear	.100 SR SELF-RET POL.
K	v20271	GIP	4/25/02	0° ± 2'	scale 1:1
L	v21903	SA	6/06/03	dr	T.BREWBAKER 10/25/94
M	M06-0068	MHT	2/10/06	engr	T. HANNA 10/25/94
N	M06-0269	AEA	7/19/06	chr	T. HANNA 10/25/94
P	M08-0291	MHT	10/08/08	appd	T. HANNA 10/25/94
sheet index	revision	P			dwg no 79280 sheet 1 of 1 size A3
	sheet	1			type Product Customer Drawing