


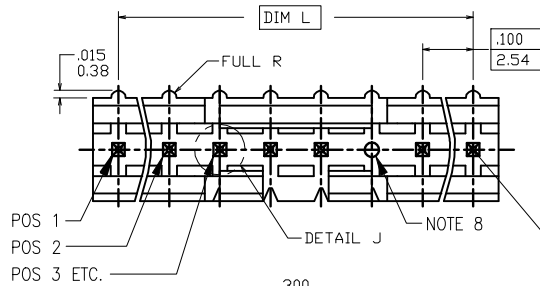


PRODUCT NO.
87800-XYHLF

LEAD FREE OPTION
NOTE 8, 9, 10
SEE TABLE
PIN PLATING
BASE PART
NUMBER

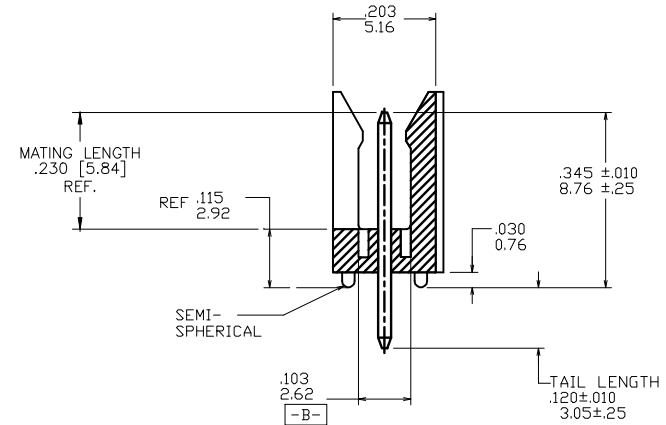

.025/.64 PIN
Φ .020/.51 Ⓜ A Ⓢ B Ⓢ
TYP
AT TIP - BOTH ENDS

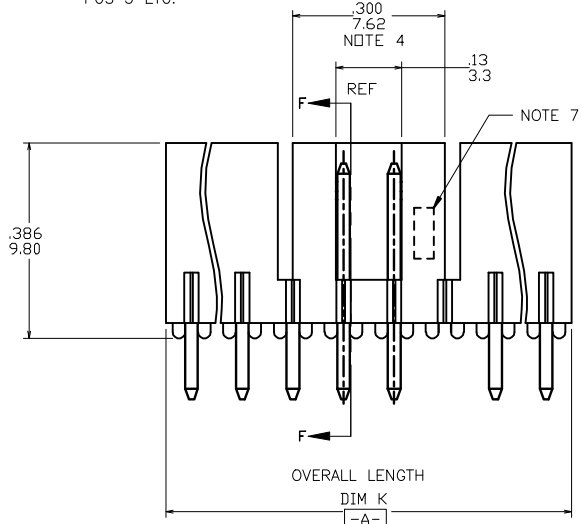

Copyright FCI

mat'l. code				surface ISO 1902	tolerance ISO 406 ISO 1101	projection ISO 1001	product family HEADER
ltr	ecn no	dr	date	tolerances unless otherwise specified		INCH/MM	title
E	V41019	HTB	6/28/95	angles	.XX±.01/XX±.03		scale 1:1
F	V50316	LSS	4/24/95	linear	.XXX±.006/XX±.013	sheet 1 of 2	
G	V50628	SAR	6/30/95	0' ± 2'	.XXX±.0020/XXX±.0051	size	87800
H	V71187	HTB	9/4/97	dr	S.ROYER 6/28/94	FCI	A3
J	M05-0134	ERE	06/15/03	engr	L.FYE 6/28/94	type	Product Customer Drawing
K	M06-0256	MHT	9/07/06	chr	J.MURPHY 6/28/94		
L	M08-0291	MHT	10/08/08	appd	L.FYE 6/28/94		
sheet	revision	L	L				
index	sheet	1	2				

PRODUCT NUMBER	NO OF POS	DIM K OVERALL LENGTH	DIM L	POLARIZED POSITION
87800-X01	1 X 3	.300/ 7.62	.200/ 5.08	3
-X02	1 X 4	.400/10.16	.300/ 7.62	3
-X03	1 X 5	.500/12.70	.400/10.16	4
-X04	1 X 6	.600/15.24	.500/12.70	5
-X05	1 X 7	.700/17.78	.600/15.24	6
-X06	1 X 8	.800/20.32	.700/17.78	7
-X07	1 X 9	.900/22.86	.800/20.32	8
-X08	1 X 12	1.200/30.48	1.100/27.94	11
-X09	1 X 13	1.300/33.02	1.200/30.48	12
-X10	1 X 8	.800/20.32	.700/17.78	6
-X11	1 X 4	.400/10.16	.300/ 7.62	1
-X12	1 X 4	.400/10.16	.300/ 7.62	2 & 3
87800-X13	1 X 4	.400/10.16	.300/ 7.62	2

NOTES:

- MOLDING MAT'L: GLASS REINFORCED PCT OR MINERAL FILLED LCP COLOR: BLACK
FLAME RETARDANT PER UL 94V-0
MAXIMUM OPERATING TEMPERATURE: 130° C
- PIN MATERIAL: 3/4 HD PHOS. BRZ.
- NO SLOTS ON 2 X 5 POSITION OR SMALLER PRODUCT. THE CENTER KEY SLOT WILL BE ON ALL HEADERS REGARDLESS OF SIZE.
- TWO NON-CRITICAL SIDES OF PIN TIP NOT PLATED, BOTH ENDS.
- POSITION NUMBERS NOT SHOWN ON PART.
- COMPANY LOGO MAY APPEAR IN THIS AREA.
- PINS OMITTED FROM INDICATED POSITIONS FOR POLARIZATION (SEE TABLE).
- ADD "HLF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION, NOT AVAILABLE FOR -5YY, -5YYH, -6YY & -6YYH.
- PART NUMBERS WITH "H" SUFFIX WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 20 SECONDS IN WAVE SOLDER, INFRA-RED OR VAPOR PHASE SOLDER PROCESS.
- PART NUMBERS WITHOUT "H" SUFFIX WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR WAVE SOLDER PROCESS.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- PLATING OPTIONS: MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.
- "THIS PRODUCT HAS 100% TIN PLATING IN THE INTERFACE AND HAS NOT BEEN TESTED FOR WHISKER GROWTH IN ALL INTERCONNECT ENVIRONMENTS."

PIN PLATING CODES

-1YY	30u"/.76u MIN (SEE NOTE 11) 50u"/1.27u Ni
-2YY	15u/.38u MIN (SEE NOTE 11) 50u"/1.27u Ni
-3YY	50u"/1.27u MIN Au 50u"/1.27u Ni
-4YY	100u"/2.54u MIN Sn 50u"/1.27u Ni (SEE NOTE 12)
-4YYHLF	
-5YY	15u"/.38u MIN (SEE NOTE 11) 50u"/1.27u Ni
-6YY	30u"/.76u MIN (SEE NOTE 11) 50u"/1.27u Ni
-7YY	30u"/.76u MIN Au OVER 50u"/1.27u MIN Ni
-8YY	15u"/.38u MIN Au OVER 50u"/1.27u MIN Ni

mat'l. code		surface	tolerance	projection	product family
		ISO 1302	ISO 406	1 st angle	HEADER
itr		tolerances unless otherwise specified		title	
ecn no				FRICION LATCH HDR	
dr				POLARIZED, SINGLE ROW VERT.	
date				scale 1:1	
L		linear		INCH/MM	
		.XX±.01/XX±0.3		sheet 2 of 2 size	
		.XXX±.006/XX±0.13		A3	
		.XXX±.0020/XXX±0.051		87800	
dr		S.ROYER	6/28/94	type Product Customer Drawing	
engr		L.FYE	6/28/94		
chr		J.MURPHY	6/28/94		
appd		L.FYE	6/28/94		
sheet	revision				
index	sheet				