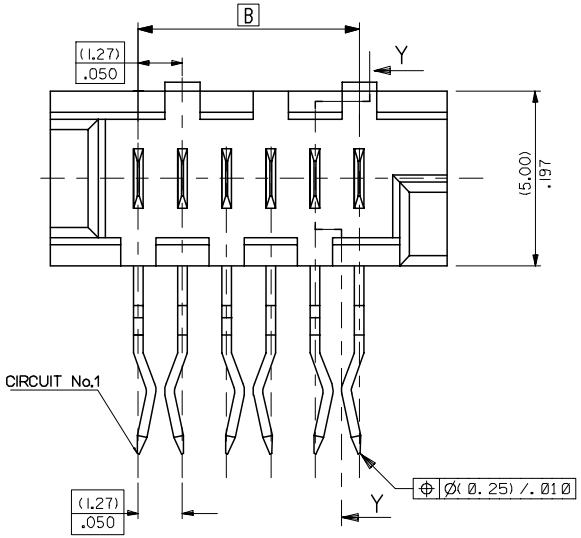

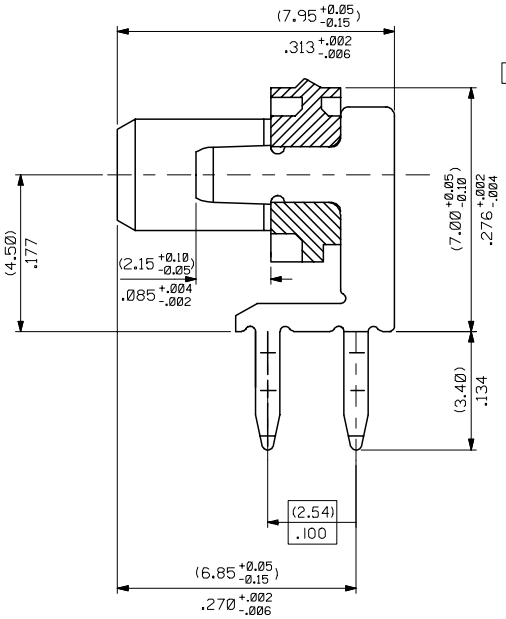

SECTION Y-Y

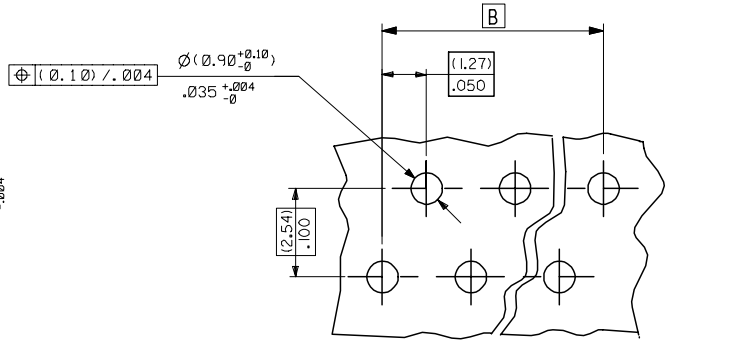

RECOMMENDED P.C.B. LAYOUT FROM COMPONENT SIDE

(PCB THICKNESS (1.60 ±0.20)/.063 ±.008

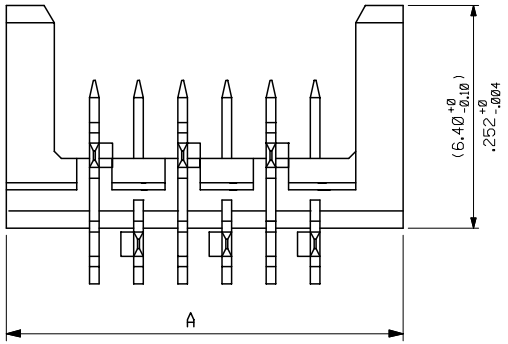

4.1Ø

90800 - x 0 xx

CIRCUIT SIZE

0= (3-5UM) / 120-200UIN TIN VERSION

3= (0.76UM) / 30UIN GOLD VERSION

90800-*026	26	(36.80)/1.449	(31.75)/1.250	14	YES
90800-*024	24	(34.26)/1.349	(29.21)/1.150	15	YES
90800-*022	22	(31.72)/1.249	(26.67)/1.050	16	YES
90800-*020	20	(29.18)/1.149	(24.13)/.950	18	YES
90800-*018	18	(26.64)/1.049	(21.59)/.850	20	YES
90800-*016	16	(24.10)/ .949	(19.05)/.750	22	YES
90800-*014	14	(21.56)/ .849	(16.51)/.650	24	YES
90800-*012	12	(19.02)/ .749	(13.97)/.550	28	YES
90800-*010	10	(16.48)/ .649	(11.43)/.450	32	YES
90800-*008	8	(13.94)/ .549	(8.89)/.350	38	YES
90800-*006	6	(11.40)/ .449	(6.35)/.250	46	YES
90800-*004	4	(8.86)/ .349	(3.81)/.150	59	YES
PART NO.	NO. OF CKTS	DIMN. A	DIMN. B	QTY PER TUBE	TOOLED

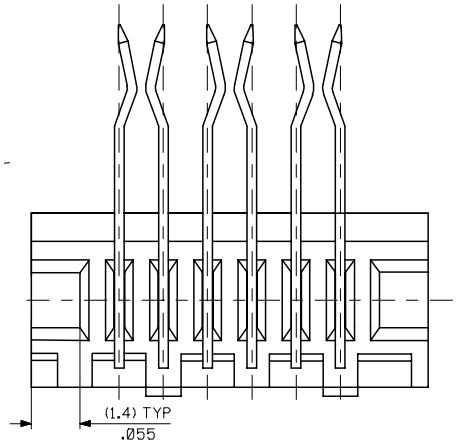

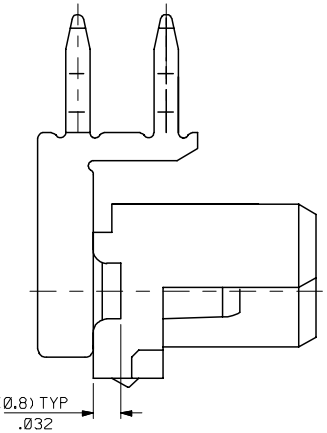

NOTES:

1) MATERIAL: HOUSING:POLYESTER PBT 15% G.F.,UL 94 V-0, BLACK.
TERMINAL- CARTRIDGE BRASS (0.28)/.011 REF THICK

2) SEE PRODUCT SPECIFICATION PS-99020-0011.

ADD CKT.1 INDICATOR
EC NO: E2007-0083
DRWN:DWASZKIEWICZ 2006/09/11
CH'KD:J.DENNEHY 2006/09/11
APPR: JDENNEHY 2006/09/13
REV G
DESCRIPTION

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .004
2 PLACES	± 0.10	± ---
1 PLACE	± ---	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 10:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: PK DATE: 1994/01/28
CHECKED BY: J.DENNEHY DATE:
APPROVED BY: J.DENNEHY DATE:
MATERIAL NO.: SEE CHART

TITLE: RIGHT ANGLE STRAGGERED PICOFLEX HEADER ASSY (1.25)/.050 CENTRES

MOLEX INCORPORATED

DOCUMENT NO.: SDA-90800E
SHEET NO.: 1 OF 1
SIZE: A2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION