DRAWING MADE IN AMERICAN PROJECTION

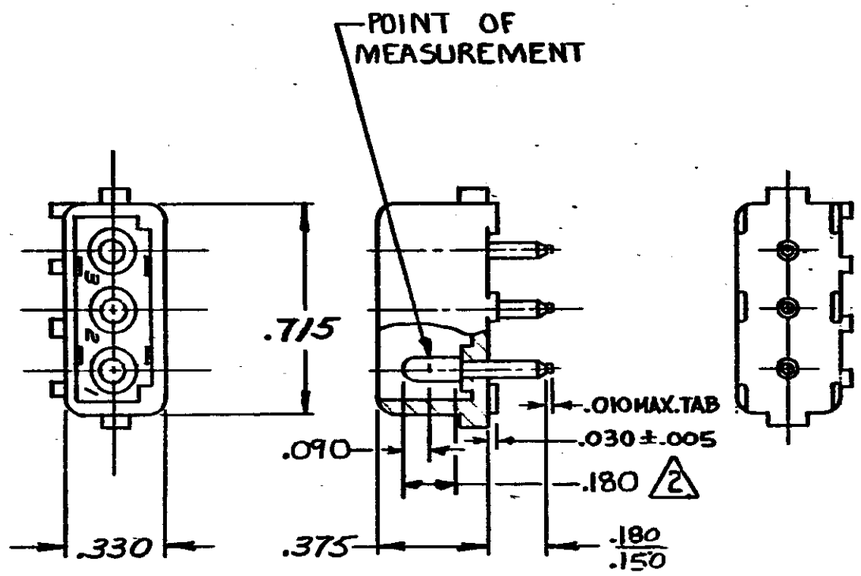

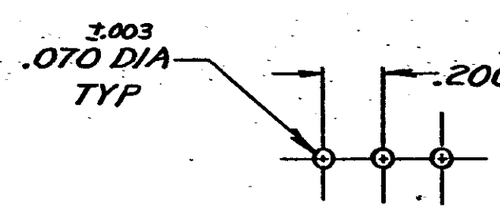

RECOMMENDED LAYOUT FOR .062 THICK P.C. BOARD

1. PARTS COMPLY WITH AMP SOLDERABILITY SPEC. NO. 109-11-3
2. CONTACT IS PLATED OVERALL WITH .000050 NICKEL, THEN .000030 GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.

ASSEMBLY NO.	HSG. MATL & COLOR	PIN MATL & FINISH
350210-2	NYLON NATURAL	COPPER ALLOY - GOLD (2)
350210-1	NYLON - NATURAL	COPPER ALLOY - PRE-TIN

Unpublished copyright not to be reproduced nor published without written permission of AMP Incorporated

©1973 BY AMP INCORPORATED. ALL RIGHTS RESERVED.
AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

CUSTOMER COPY REFERENCE ONLY

LTR	REVISION RECORD	DR	CHK	DATE
T	OBSOLETE 1-- 2-1 PER ECN CM-2706	NG	RS	8-9-72
S	OBS 9-1 PER CM 2213	JB	RS	3/26/71

REQUIRED PER ASSEMBLY

DESCRIPTION

NUMBER 350210

DR 9. Eckman 4-12-73
CHK Em Pol Fowlkes 4/12/73
DE J. Nunlee 4-13-73
APP J. Nunlee 4-13-73

MATERIAL AND FINISH: SEE TABLE
WIRE - RANGE - INSULATION: --- / ---
TOLERANCE EXCEPT AS NOTED ± .015 ± 1° 0'
SCALE: ---

AMP INCORPORATED HARRISBURG, PENNA

CLASS .084 DIA. PIN
TYPE PIN HEADER
LOC CM | B | NO 350210 | REV T

NAME 3 CIRCUIT MATE-N-LOK P.C. BOARD HEADER

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

PRINT LIST 53

AMP 1253 REV 11/65

WAS P-72-6198

US S

7 6 5 4 3 2 1

D C B A