
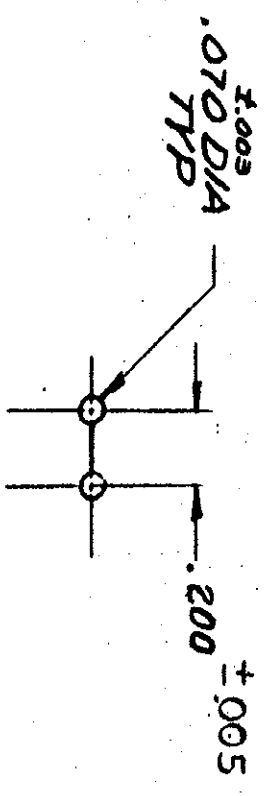


1: PARTS COMPLY WITH AMP SOLDERABILITY SPEC. NO. 109-11-3

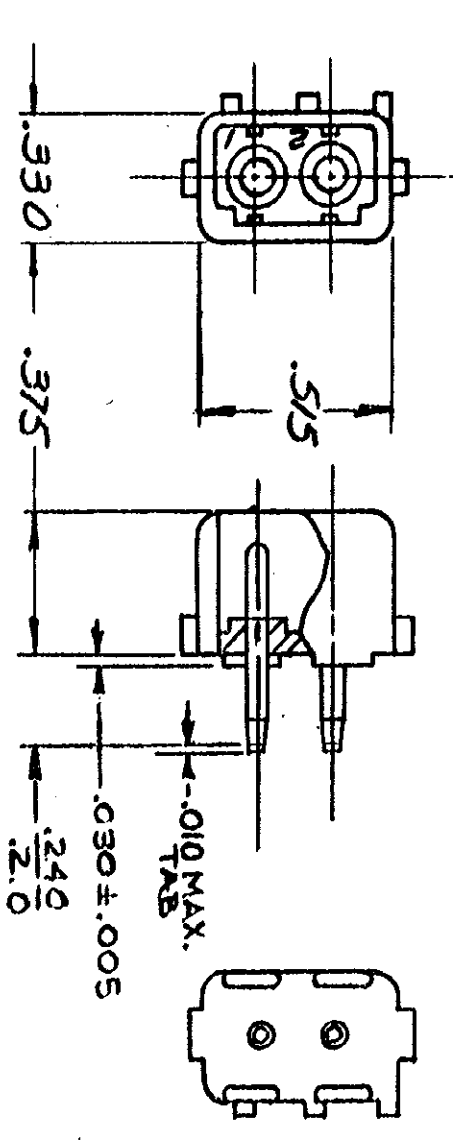

RECOMMENDED LAYOUT FOR .125 THICK P.C. BOARD

DIMENSIONS IN INCHES, DO NOT SCALE PRINT.

L	ABSOLUTE -2	PER ECN CM-2709
K	41,51,64,71,81,91	72,22,32,42,52,62
	72,82,92 CM473	

REV.	BY	CHK	DATE	DESCRIPTION
J1	RESTORED	RS	4/1/85	
J	REV. PER M-7375	PS	8/27/83	
H	228 WBS 250, M-7285	PS	11/11/82	
G	ADDED NOTE 2, M-6694	MS	1/25/81	
F	REV. INTL LENGTH N-3334	MS	5/24/77	
E	REVISED M-4161	MF	3/13/77	
D	ECN M-3871	MS	9/4/76	
C	ECN M-3452	GY	1/24/76	
B	ECN M-3156	ED	7/16/75	
A	REWORK AREA CAVES	MS	5/27/73	

REV.	BY	CHK	DATE	DESCRIPTION
350422-1				

REQUIRED PER ASSEMBLY

ASSEMBLY NO. **350422-1** NYLON - NAT. ALLOY COPPER PRE-TIN

HSG. MATL & COLOR **PIN MATL & FINISH**

© 1973 BY AMP INCORPORATED. ALL RIGHTS RESERVED.
AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

NATURAL AND FINISH

SEE TABLE

WIRE RANGE - INSULATION

SCALE

LOC

NO

350422

CIRCUIT BOARD HEADER

350422