
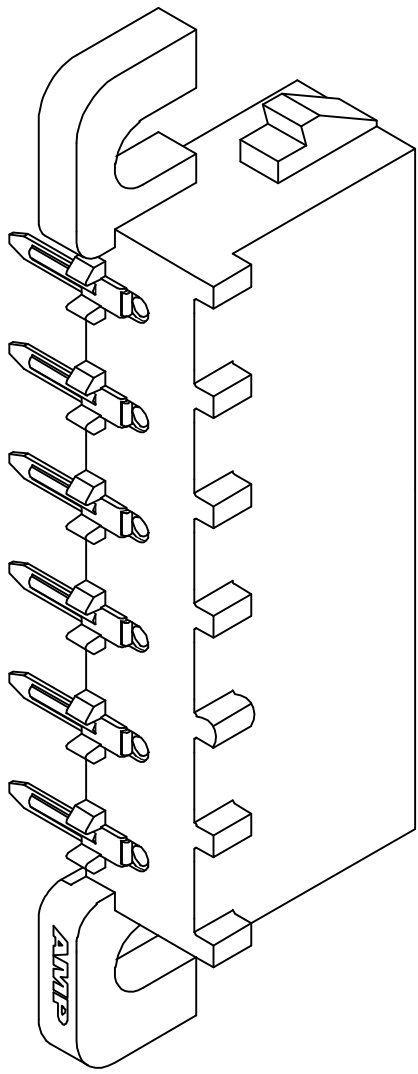


LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			M	REVISED PER ECO-05-001860	22JULY05	KW	SR



1. PARTS COMPLY WITH AMP SOLDERABILITY SPECIFICATION 109-11-5.
- △

 CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES,BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- △

 OPTIONAL CONSTRUCTION MAY DELETE THIS RIB.

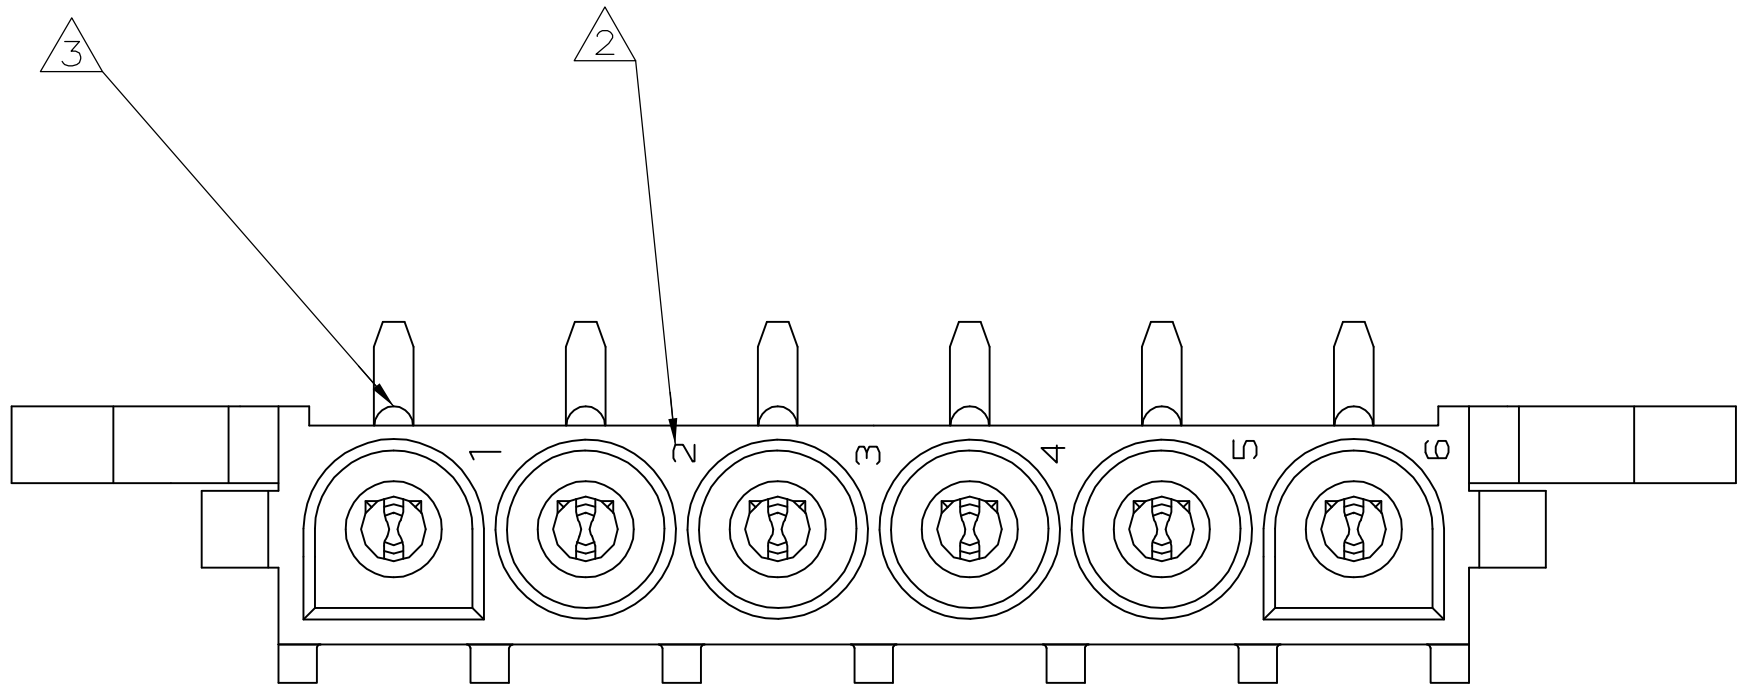


3-DIMENSIONAL MODEL
NTS

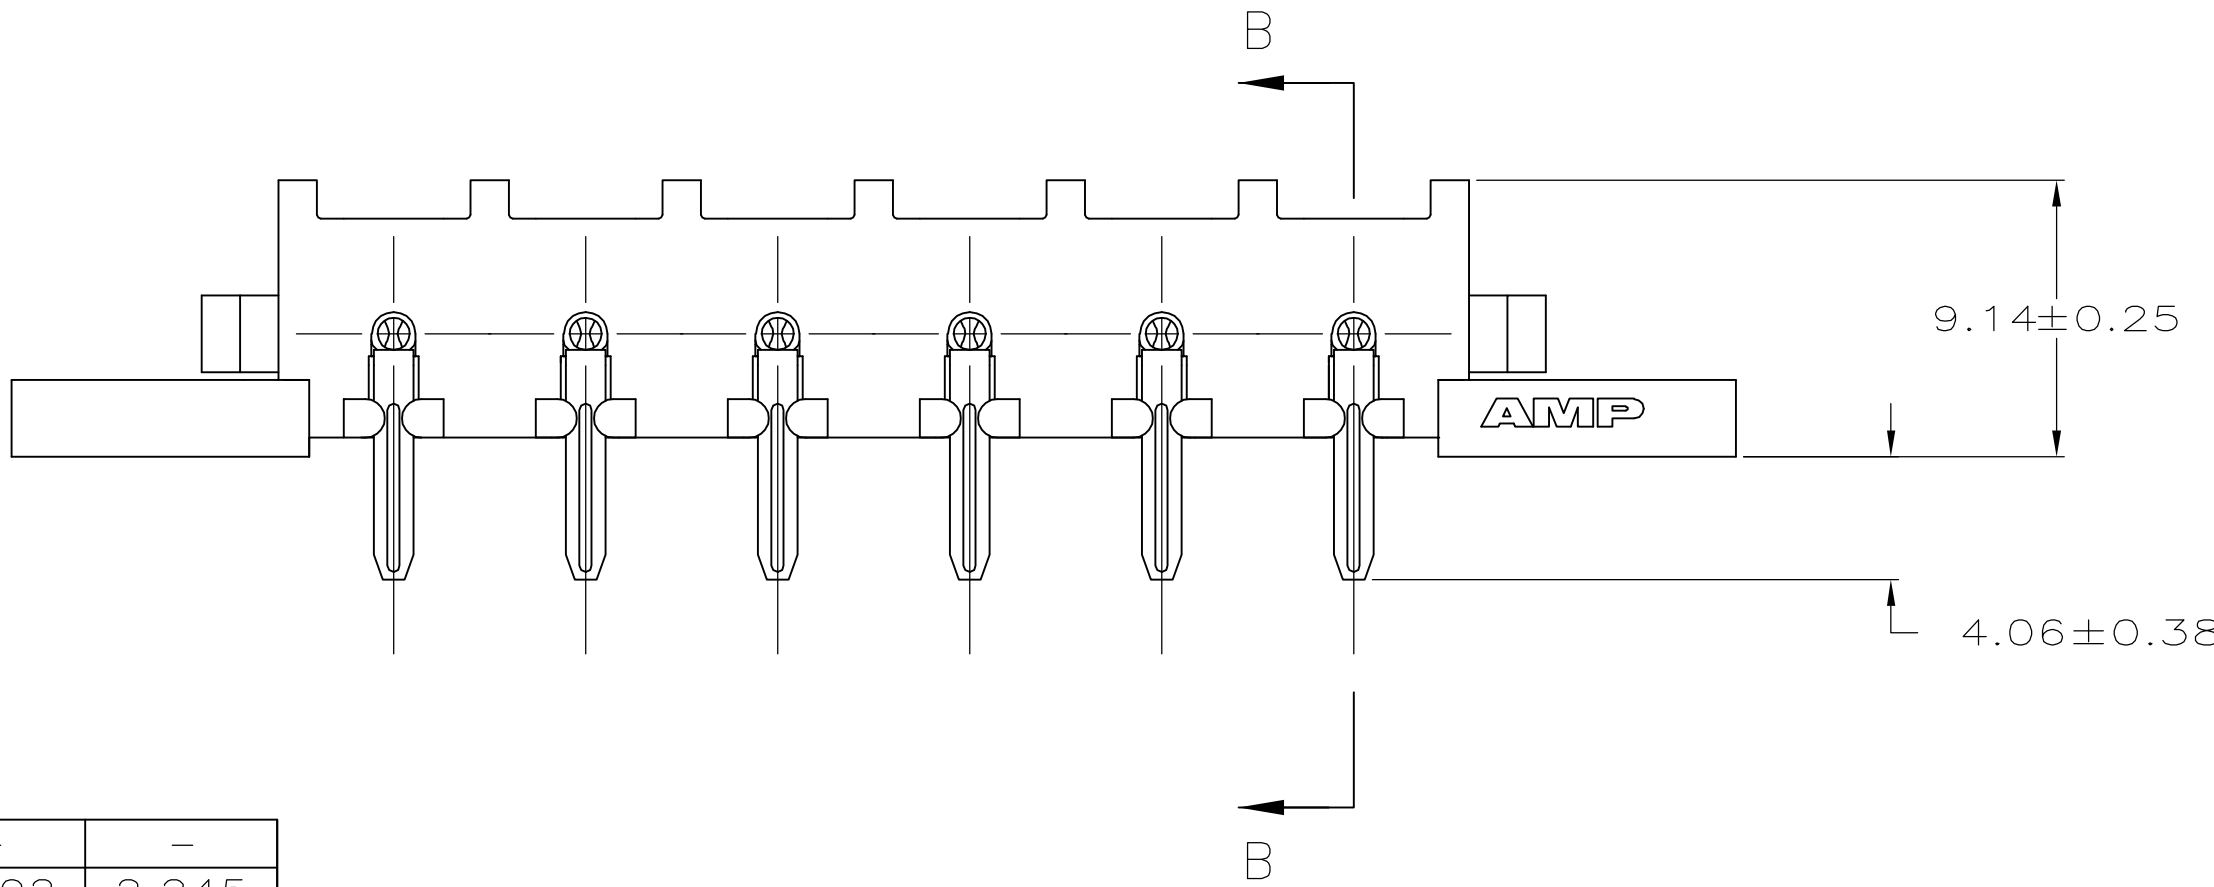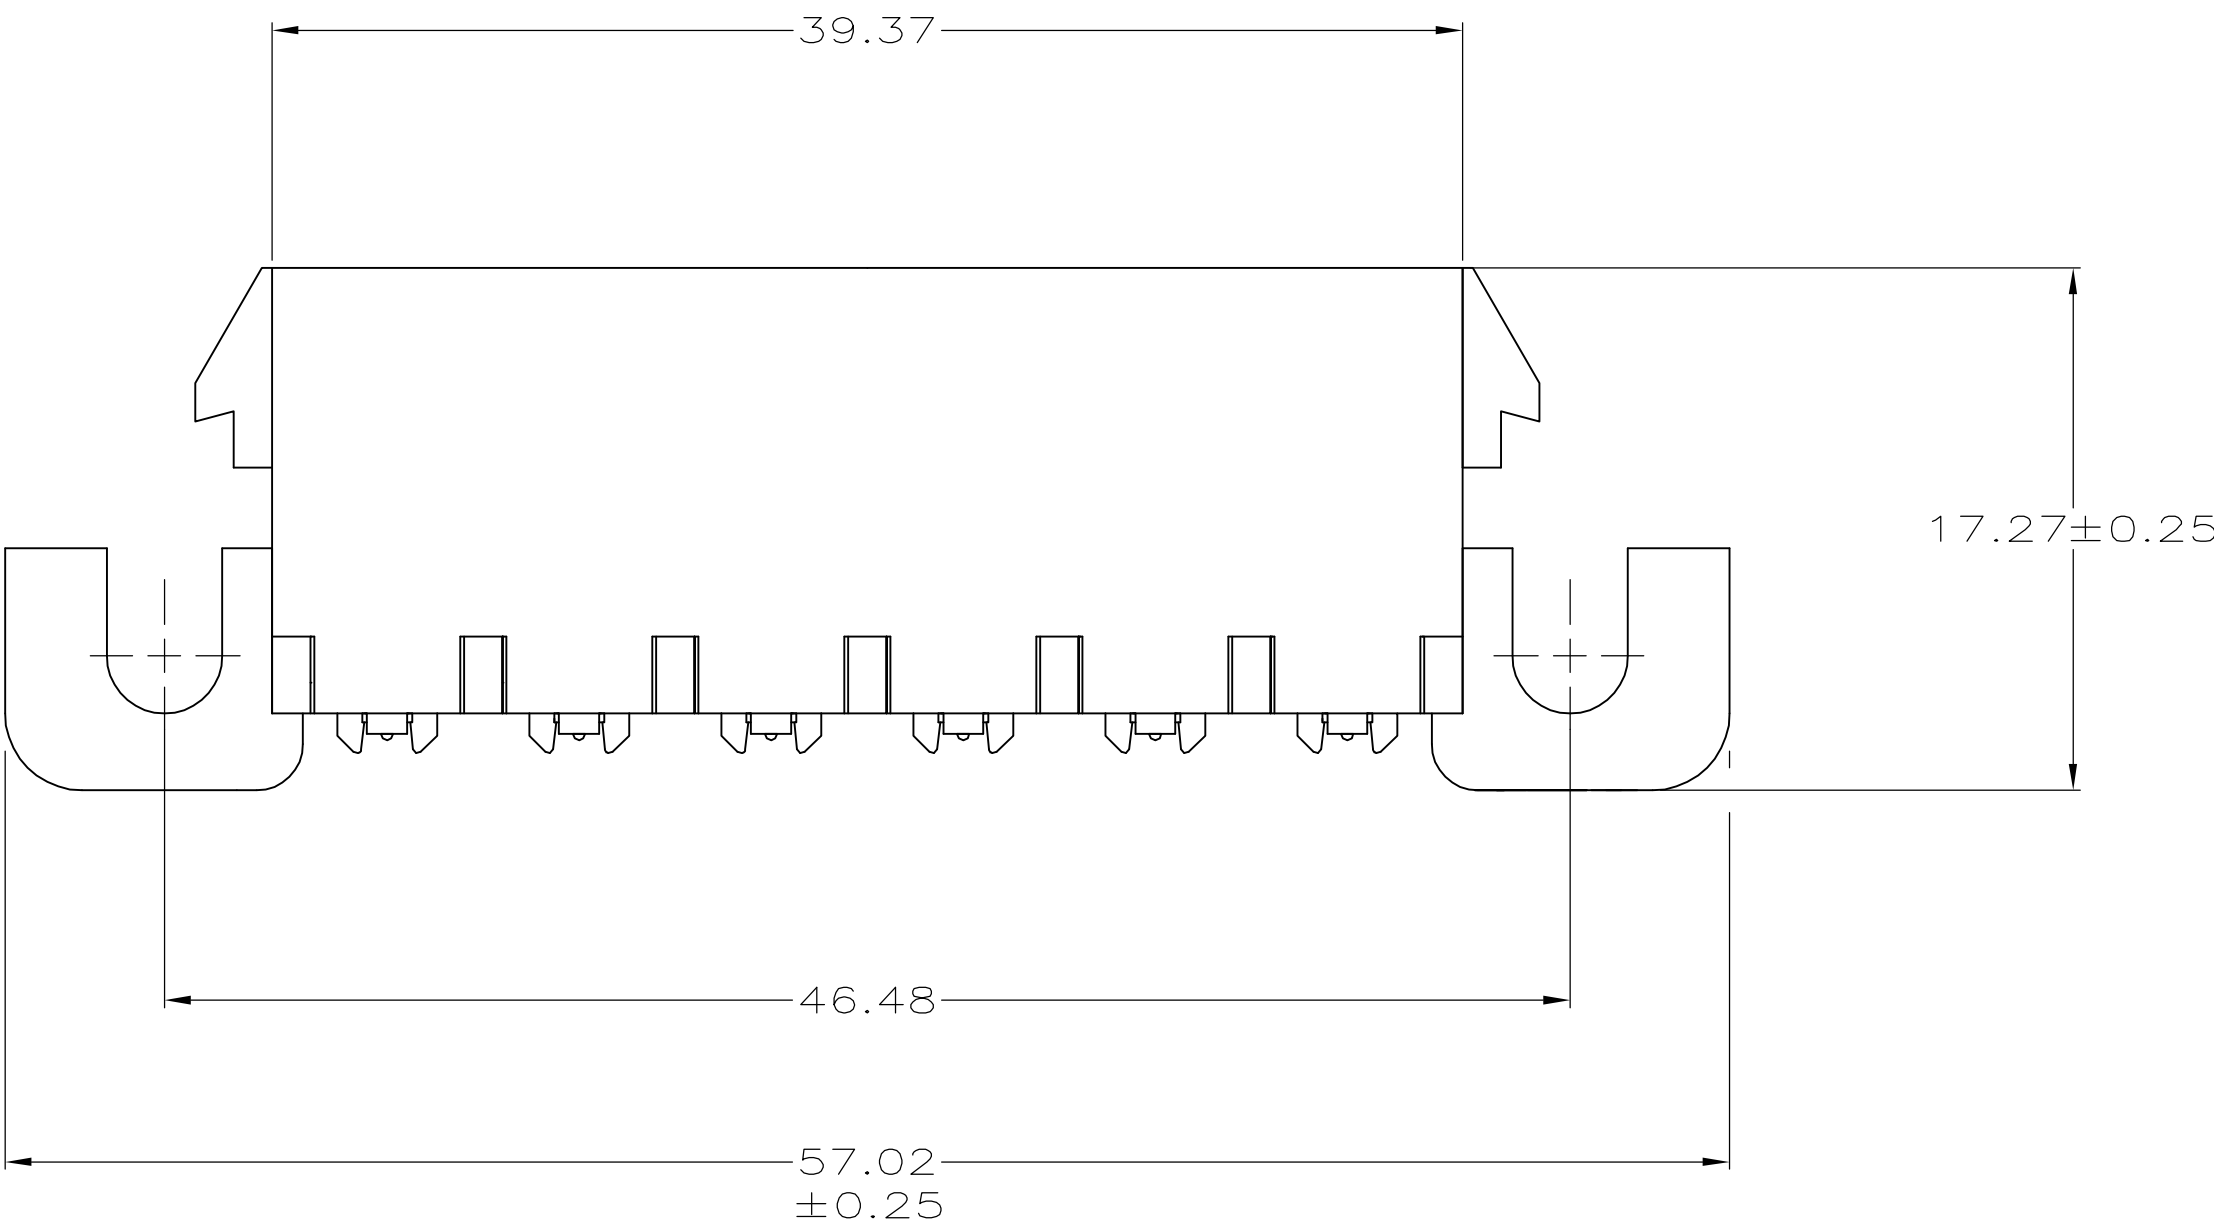


4.06	.160	—	—
3.81	.150	57.02	2.245
2.54	.100	46.48	1.830
2.24	.088	39.37	1.550
2.11	.083	31.75	1.250
1.98	.078	25.40	1.000
1.85	.073	19.05	.750
1.57	.062	17.27	.680
1.52	.060	12.83	.505
0.38	.015	12.70	.500
0.25	.010	9.14	.360
0.13	.005	7.37	.290
0.08	.003	6.35	.250
MM	IN	MM	IN
CONVERSION TABLE			


AMP 4805 REV 31MAR2000

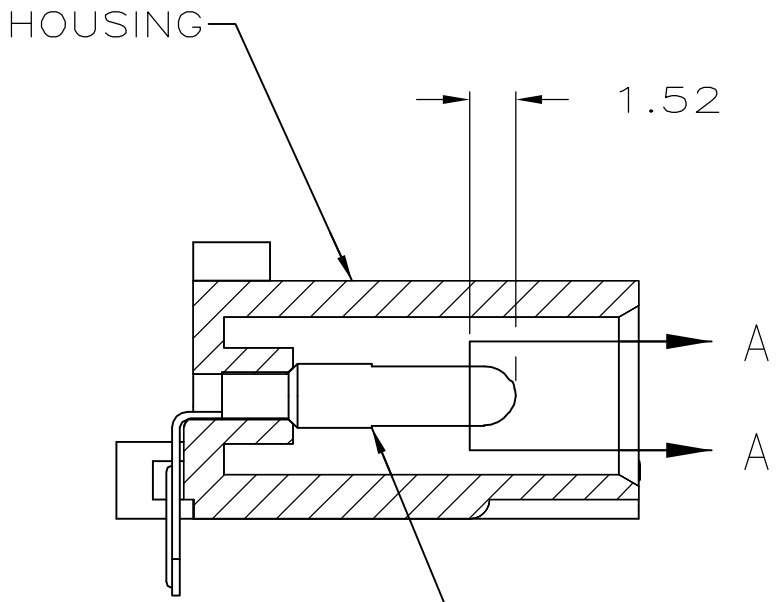

SECTION B-B

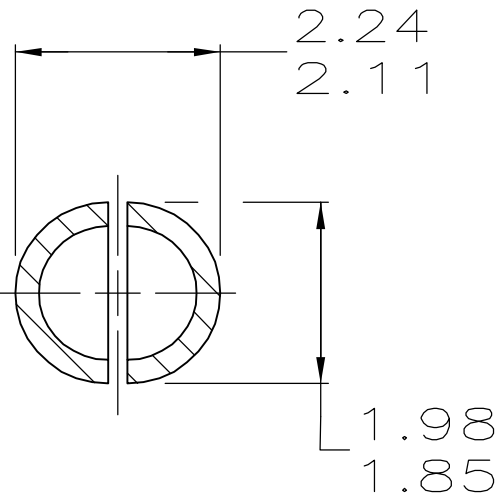

SECTION A-A
SCALE 10:1

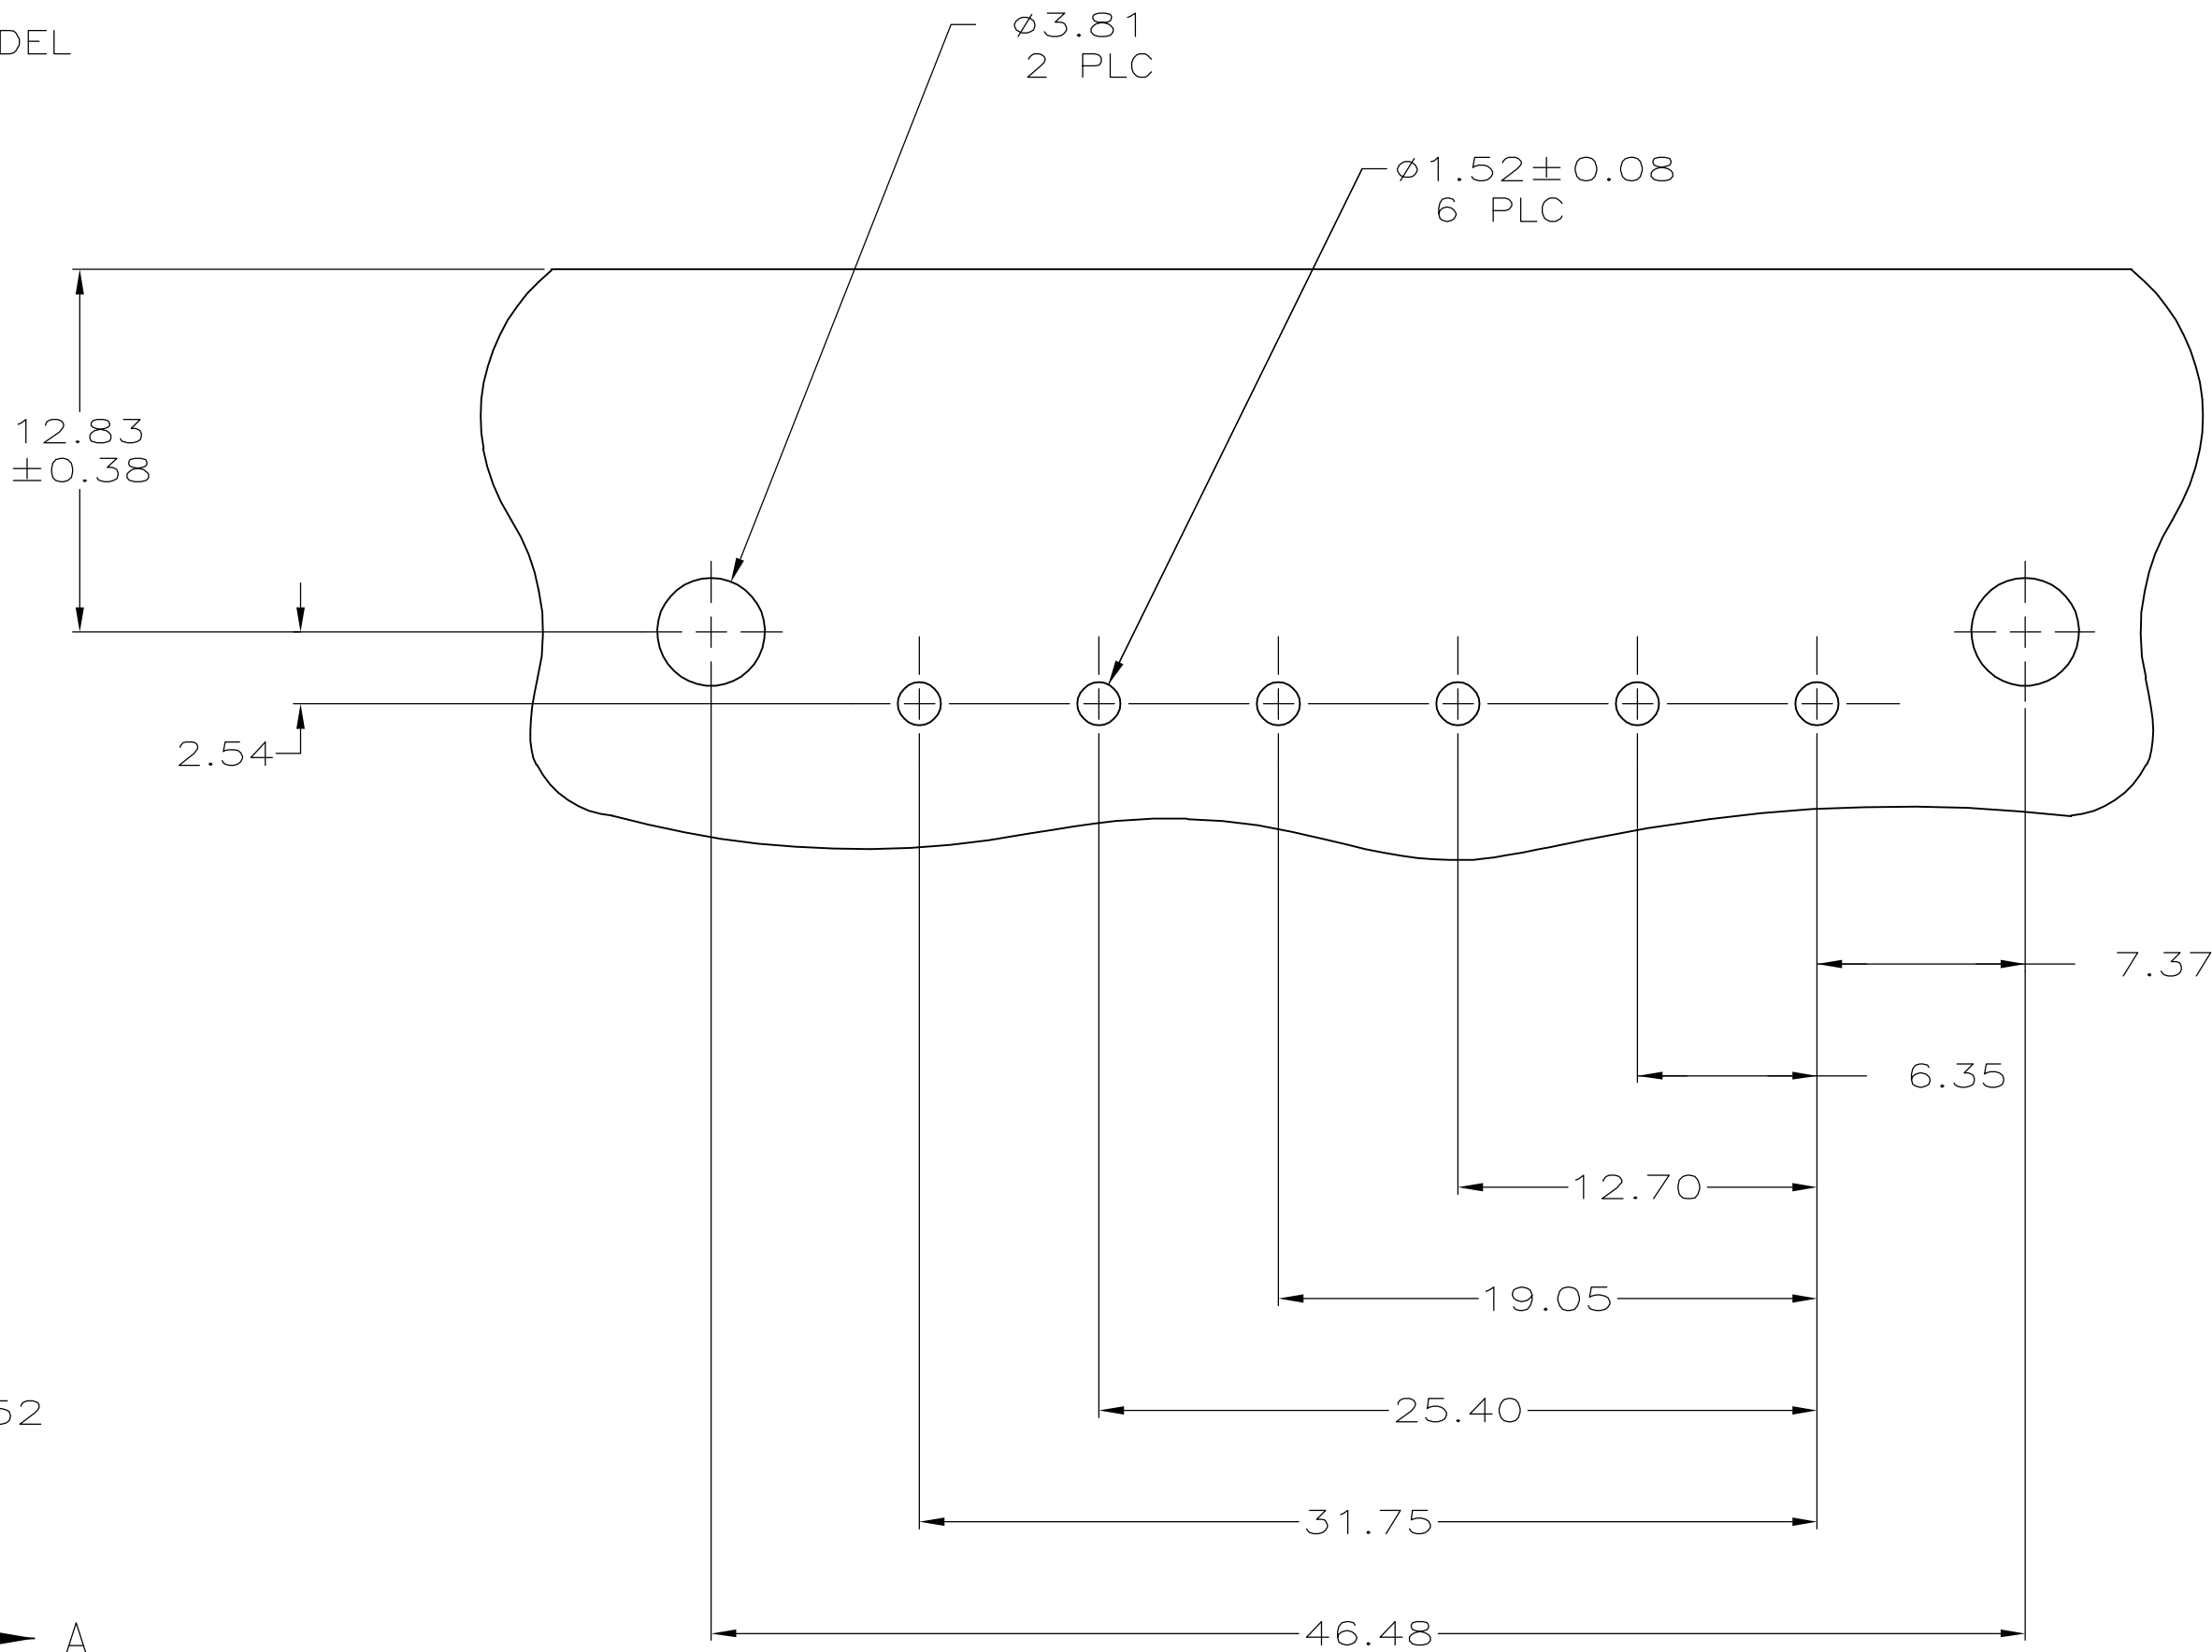

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 THICK P.C. BOARD

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 22JULY2005	Tyco Electronics Corporation Harriaburg, Pa 17105-3608	
DIMENSIONS: mm		CHK S. RIDGILL 22JULY2005	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD S. RIDGILL 22JULY2005	PRODUCT SPEC	
MATERIAL SEE TABLE		FINISH SEE TABLE	APPLICATION SPEC	
WEIGHT		—	RESTRICTED TO	
CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1 REV M	