


SUPERSEDED BY 1-103321-4
 SUPERSEDED BY 103321-3

5		.484	.400	4	5	5-103321-3
5	6	1.384	1.300	13	14	5-103321-2
5	6	1.184	1.100	11	12	5-103321-1
5	6	1.084	1.000	10	11	5-103321-0
5	6	.884	.800	8	9	4-103321-9
5		3.984	3.900	39	40	4-103321-8
5		1.584	1.500	15	16	4-103321-7
5		.784	.700	7	8	4-103321-6
5		.284	.200	2	3	4-103321-5
5		.184	.100	1	2	4-103321-4
5	6	.084	—	—	1	4-103321-3
	3	1.384	1.300	13	14	4-103321-2
	3	.284	.200	2	3	4-103321-1
4		3.984	3.900	39	40	4-103321-0
4		3.884	3.800	38	39	3-103321-9
4		3.784	3.700	37	38	3-103321-8
4		3.684	3.600	36	37	3-103321-7
4		3.584	3.500	35	36	3-103321-6
4		3.484	3.400	34	35	3-103321-5
4		3.384	3.300	33	34	3-103321-4
4		3.284	3.200	32	33	3-103321-3
4		3.184	3.100	31	32	3-103321-2
4		3.084	3.000	30	31	3-103321-1
4		2.984	2.900	29	30	3-103321-0
4		2.884	2.800	28	29	2-103321-9
4		2.784	2.700	27	28	2-103321-8
4		2.684	2.600	26	27	2-103321-7
4		2.584	2.500	25	26	2-103321-6
4		2.484	2.400	24	25	2-103321-5
4		2.384	2.300	23	24	2-103321-4
4		2.284	2.200	22	23	2-103321-3
4		2.184	2.100	21	22	2-103321-2
4		2.084	2.000	20	21	2-103321-1
4		1.984	1.900	19	20	2-103321-0
4		1.884	1.800	18	19	1-103321-9
4		1.784	1.700	17	18	1-103321-8
4		1.684	1.600	16	17	1-103321-7
4		1.584	1.500	15	16	1-103321-6
4		1.484	1.400	14	15	1-103321-5
4		1.384	1.300	13	14	1-103321-4
4		1.284	1.200	12	13	1-103321-3
4		1.184	1.100	11	12	1-103321-2
4		1.084	1.000	10	11	1-103321-1
4		.984	.900	9	10	1-103321-0
4		.884	.800	8	9	103321-9
4		.784	.700	7	8	103321-8
4		.684	.600	6	7	103321-7
4		.584	.500	5	6	103321-6
4		.484	.400	4	5	103321-5
4		.384	.300	3	4	103321-4
4		.284	.200	2	3	103321-3
4		.184	.100	1	2	103321-2
4		.084	—	—	1	103321-1

- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
 - ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 3 PACKAGE IN SINGLE TUBES
 - 4 .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL.
 - 5 .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
 - 6 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
 - △ HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK.

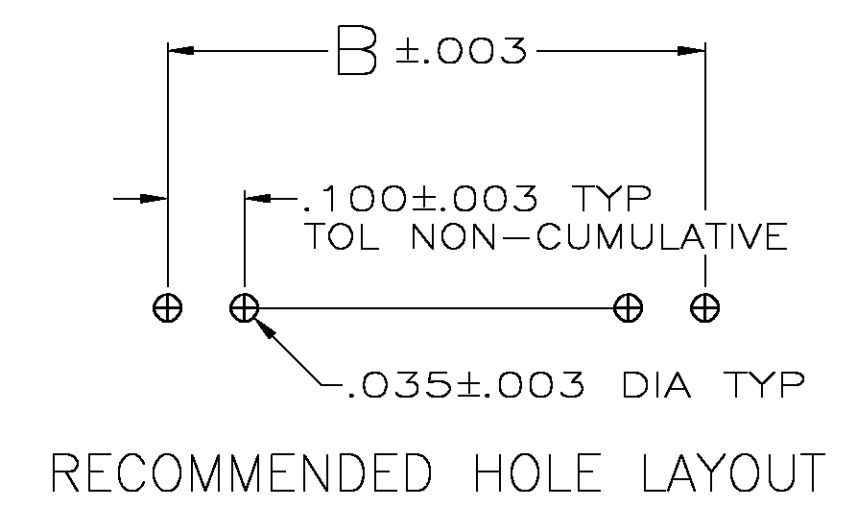

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN J. MARTINELLI 15OCT92	APPO B. FLINCHBAUGH 23NOV92	NAME	TYCO Electronics	Tyco Electronics Corporation Harrisburg, PA 17105
0 PLC ± -	1 PLC ± -	2 PLC ± -	3 PLC ± .005	4 PLC ± -	ANGLES ± -	FINISH SEE TABLE
MATERIAL PHOSPHOR BRONZE	FINISH SEE TABLE	WEIGHT	SIZE A1	CAGE CODE 00779	DRAWING NO. 103321	RESTRICTED TO
CUSTOMER DRAWING			SCALE 4:1	SHEET 1 OF 1	REV P	

ASSEMBLY, HEADER, BREAKAWAY, MOD II, SINGLE ROW, .100 C/L, VERTICAL, WITH .025 SQUARE POSTS