


LOC		DIST		REVISIONS				
AD	00	P	LTR	DESCRIPTION	DATE	DMN	APVD	
		N1		ECO-07-030575	27DEC2007	RB	JG	

- 1 THE NOTED DIMENSION APPLIES AT THE INTERSECTION OF THE POST AND HOUSING
- 2 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 3 POSTS: .000030 GOLD IN CONTACT AREA .000100-.000200 MATTE TIN LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL
- 4 POSTS: .000030 GOLD IN CONTACT AREA .000100-.000200 MATTE TIN ON SOLDER TAIL, ALL OVER .000050 NICKEL

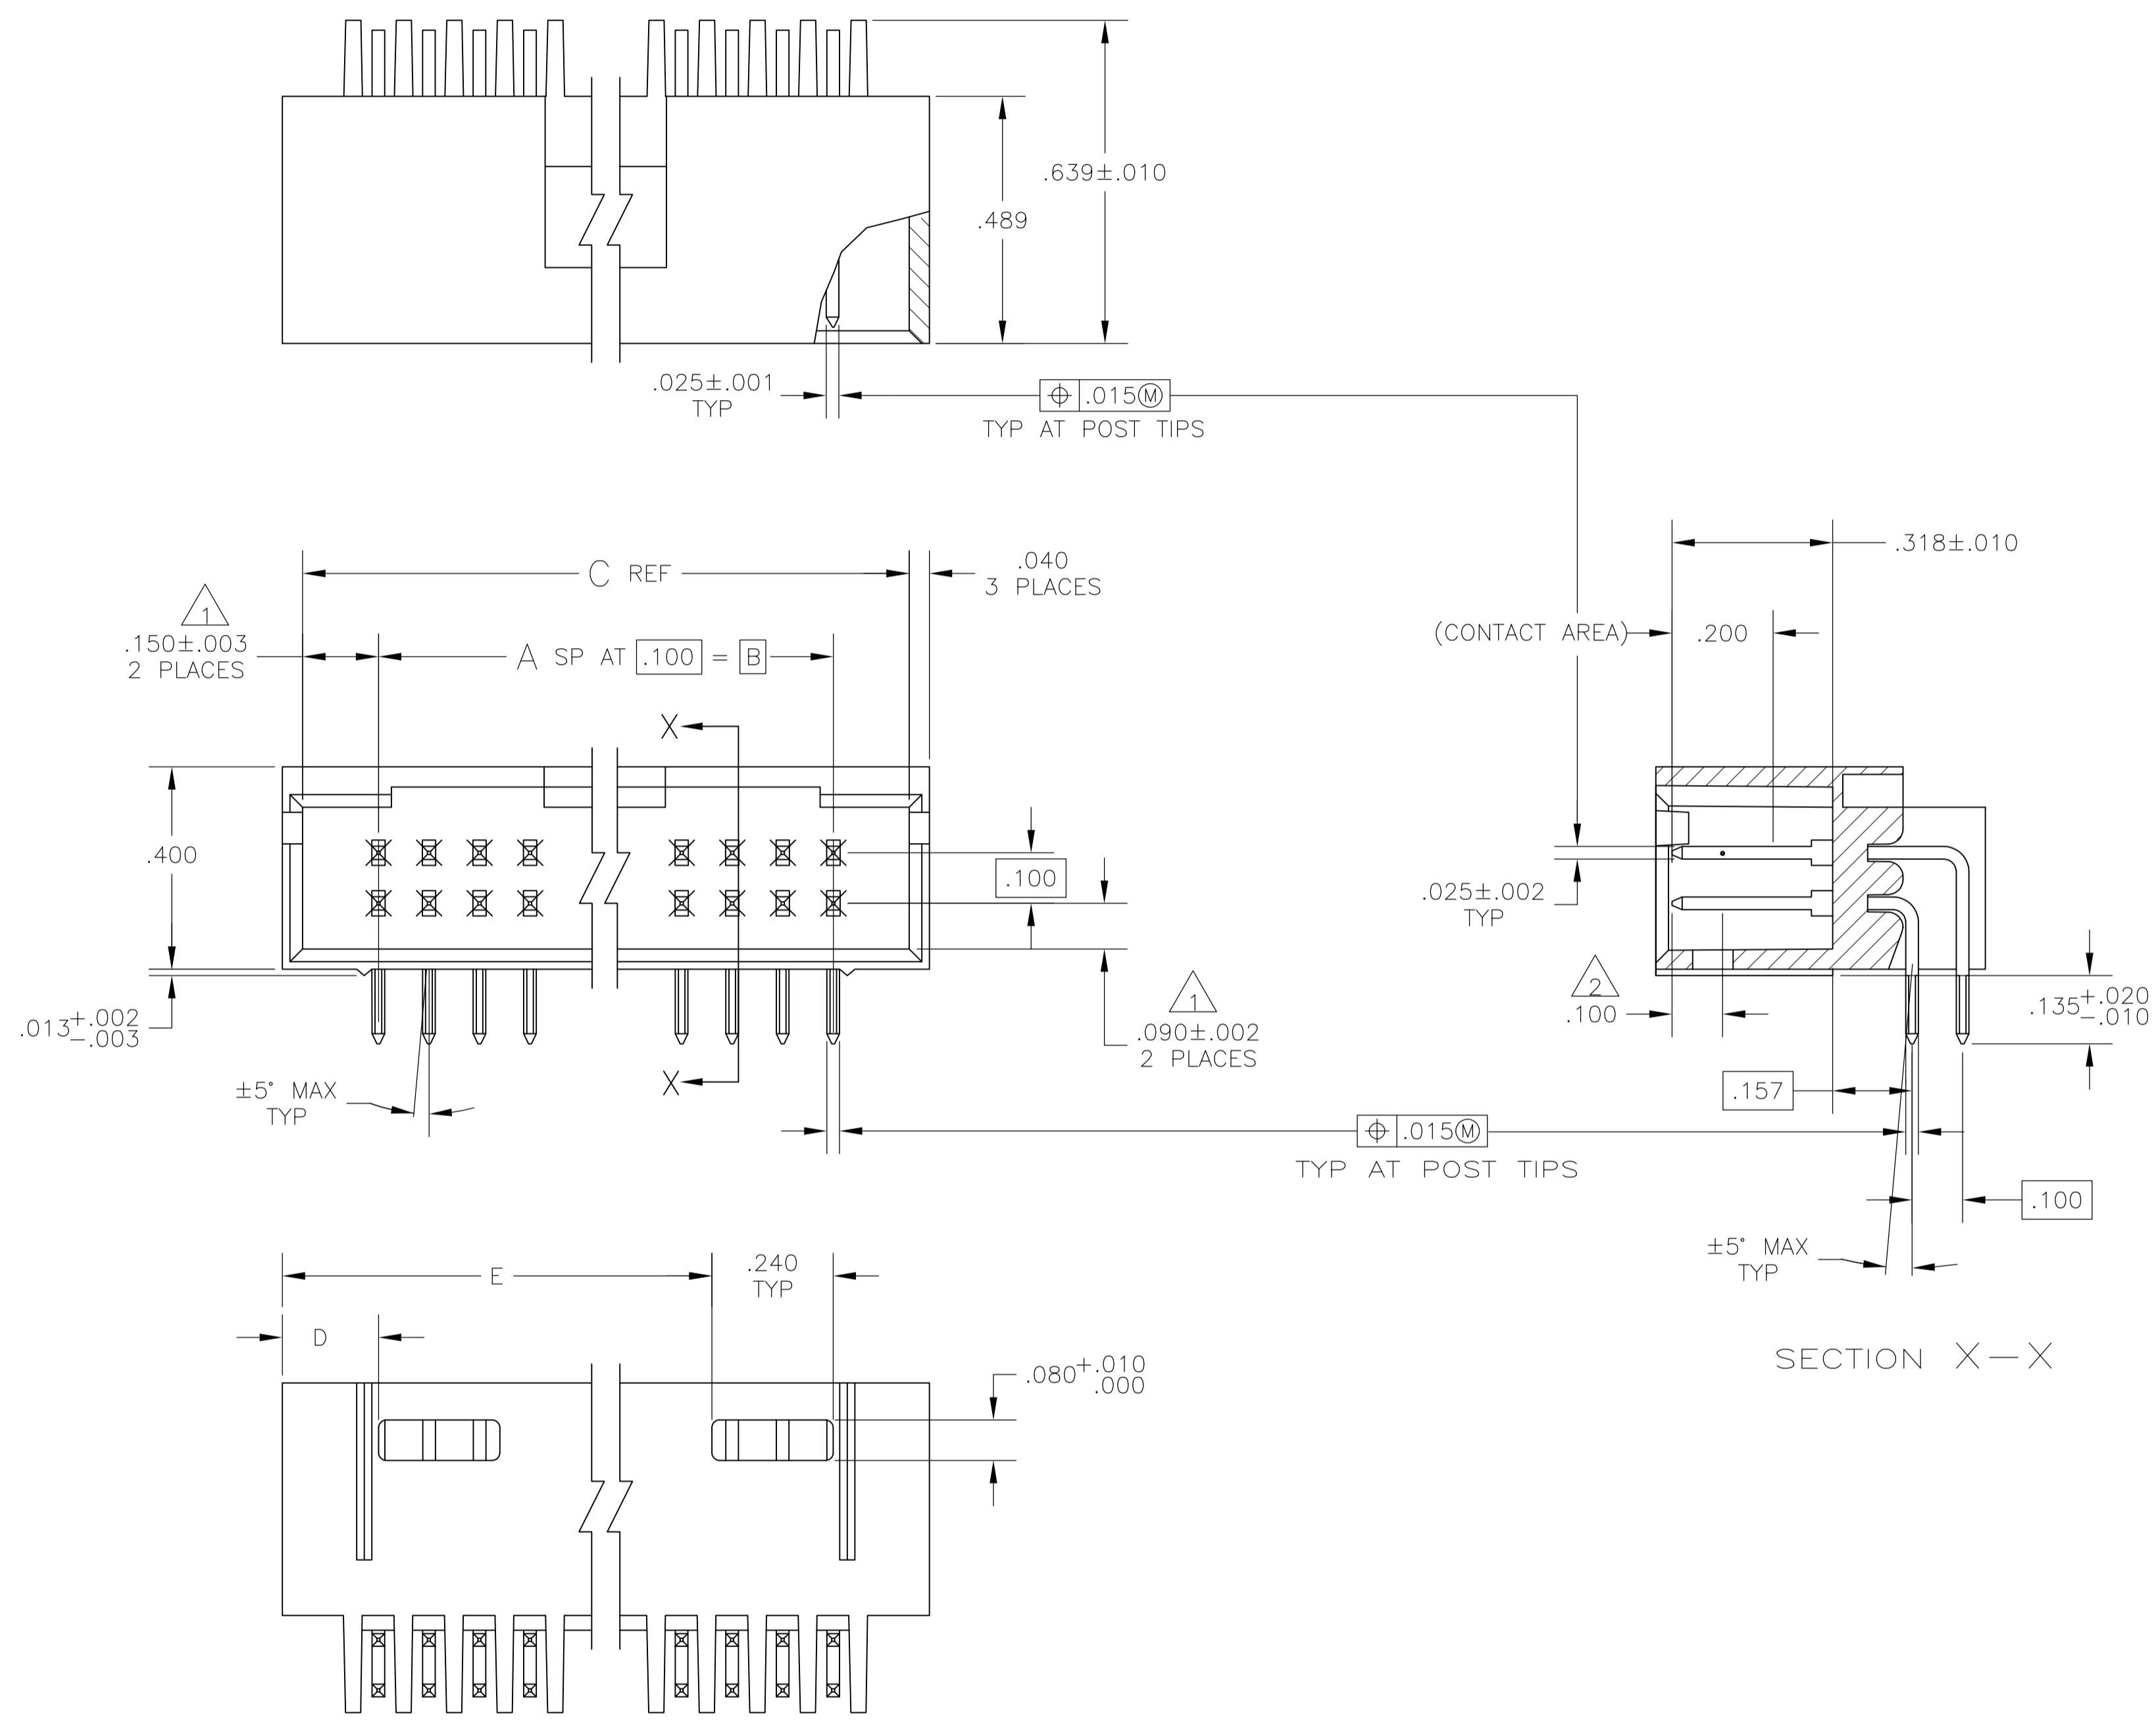

4	3	2	1	0	35	34	33	32	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
3.490	.190	3.800	3.500	35	72	8-103167-3																																	
3.390	.190	3.700	3.400	34	70	8-103167-2																																	
3.290	.190	3.600	3.300	33	68	8-103167-1																																	
3.190	.190	3.500	3.200	32	66	8-103167-0																																	
3.090	.190	3.400	3.100	31	64	7-103167-9																																	
2.990	.190	3.300	3.000	30	62	7-103167-8																																	
2.890	.190	3.200	2.900	29	60	7-103167-7																																	
2.790	.190	3.100	2.800	28	58	7-103167-6																																	
2.690	.190	3.000	2.700	27	56	7-103167-5																																	
2.590	.190	2.900	2.600	26	54	7-103167-4																																	
2.490	.190	2.800	2.500	25	52	7-103167-3																																	
2.390	.190	2.700	2.400	24	50	7-103167-2																																	
2.290	.190	2.600	2.300	23	48	7-103167-1																																	
2.190	.190	2.500	2.200	22	46	7-103167-0																																	
2.090	.190	2.400	2.100	21	44	6-103167-9																																	
1.990	.190	2.300	2.000	20	42	6-103167-8																																	
1.890	.190	2.200	1.900	19	40	6-103167-7																																	
1.790	.190	2.100	1.800	18	38	6-103167-6																																	
1.690	.190	2.000	1.700	17	36	6-103167-5																																	
1.590	.190	1.900	1.600	16	34	6-103167-4																																	
1.490	.190	1.800	1.500	15	32	6-103167-3																																	
1.390	.190	1.700	1.400	14	30	6-103167-2																																	
1.290	.190	1.600	1.300	13	28	6-103167-1																																	
1.190	.190	1.500	1.200	12	26	6-103167-0																																	
1.090	.190	1.400	1.100	11	24	5-103167-9																																	
.990	.190	1.300	1.000	10	22	5-103167-8																																	
.890	.190	1.200	.900	9	20	5-103167-7																																	
.490	1.100	.800	8	18	5-103167-6																																		
.390	1.000	.700	7	16	5-103167-5																																		
.390	.900	.600	6	14	5-103167-4																																		
.290	.800	.500	5	12	5-103167-3																																		
.290	.700	.400	4	10	5-103167-2																																		
.190	.600	.300	3	8	5-103167-1																																		
3.490	.190	3.800	3.500	35	72	3-103167-3																																	
3.390	.190	3.700	3.400	34	70	3-103167-2																																	
3.290	.190	3.600	3.300	33	68	3-103167-1																																	
3.190	.190	3.500	3.200	32	66	3-103167-0																																	
3.090	.190	3.400	3.100	31	64	2-103167-9																																	
2.990	.190	3.300	3.000	30	62	2-103167-8																																	
2.890	.190	3.200	2.900	29	60	2-103167-7																																	
2.790	.190	3.100	2.800	28	58	2-103167-6																																	
2.690	.190	3.000	2.700	27	56	2-103167-5																																	
2.590	.190	2.900	2.600	26	54	2-103167-4																																	
2.490	.190	2.800	2.500	25	52	2-103167-3																																	
2.390	.190	2.700	2.400	24	50	2-103167-2																																	
2.290	.190	2.600	2.300	23	48	2-103167-1																																	
2.190	.190	2.500	2.200	22	46	2-103167-0																																	
2.090	.190	2.400	2.100	21	44	1-103167-9																																	
1.990	.190	2.300	2.000	20	42	1-103167-8																																	
1.890	.190	2.200	1.900	19	40	1-103167-7																																	
1.790	.190	2.100	1.800	18	38	1-103167-6																																	
1.690	.190	2.000	1.700	17	36	1-103167-5																																	
1.590	.190	1.900	1.600	16	34	1-103167-4																																	
1.490	.190	1.800	1.500	15	32	1-103167-3																																	
1.390	.190	1.700	1.400	14	30	1-103167-2																																	
1.290	.190	1.600	1.300	13	28	1-103167-1																																	
1.190	.190	1.500	1.200	12	26	1-103167-0																																	
1.090	.190	1.400	1.100	11	24	103167-9																																	
.990	.190	1.300	1.000	10	22	103167-8																																	
.890	.190	1.200	.900	9	20	103167-7																																	
.490	1.100	.800	8	18	103167-6																																		
.390	1.000	.700	7	16	103167-5																																		
.390	.900	.600	6	14	103167-4																																		
.290	.800	.500	5	12	103167-3																																		
.290	.700	.400	4	10	103167-2																																		
.190	.600	.300	3	8	103167-1																																		

.100±.003 TYP TOLERANCE NON-CUMULATIVE

.100±.003  
 φ.035±.003 TYP

RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT. DIN H MOLL 27JUL87  
 CHK R FRIDT 28JUL87  
 APVD R FLICKER 29JUL87

Tyco Electronics Corporation  
 Harrisburg, Pa 17105-3608

NAME: HDR ASSY, MOD II, SHROUDED, 4 SIDES, DBL ROW, .100X.100 RIGHT ANGLE, W/ .025 SQ POSTS

APPLICATION SPEC: PRODUCT SPEC

SIZE: A1  
 WEIGHT: 100779  
 CUSTOMER DRAWING

SCALE: 4:1 SHEET 1 OF 1 REV N1