



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

LOC		DIST		P		F		ZONE		LTR		REVISIONS		DATE	APPROVED	
AD	00												DESCRIPTION			
													o	RELEASED	-	-
													A	REV PER ECN AR2325	JPG	4-20-89
													B	REV LOC & DIST AD-4171		3-90 BF
													C	0B5 PER 0010-0831-93		9-15-93 JG
													D	REV PER 0010-0782-93		2-16-94 JG
													E	REV PER 0010-1884-93		2-16-94 JG
													F	REV PER 0010-0104-95		3-3-95 JG
													G	REV PER 0010-0012-96		1-3-96 JG
													H	REV PER 0010-1114-95		1-25-96 JG
													J	REV PER 0430-0025-96		1-23-97 JG
													K	REV PER 0310-0040-97		1-28-97 JG
													L	REV PER 0310-0355-97		02-FEB-98 JG
													M	REV PER EC 0G3C-0441-00		05FEB01 KW

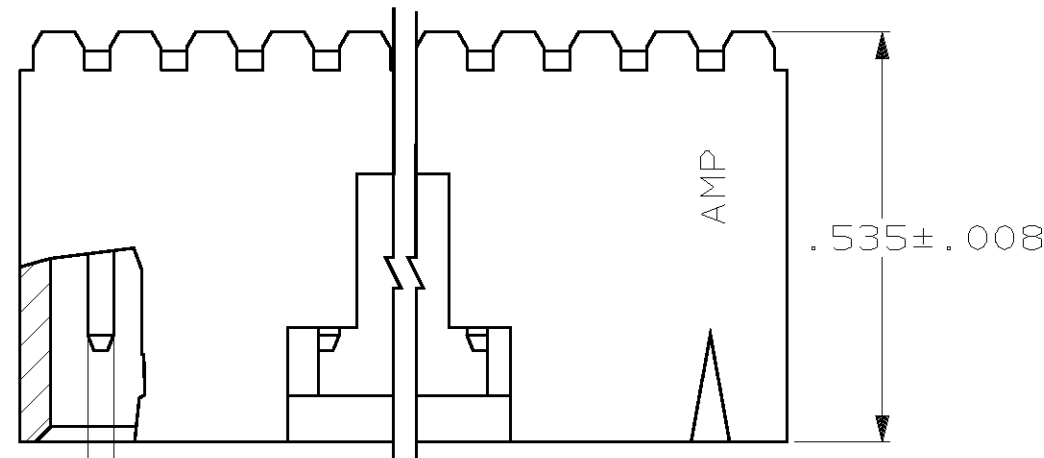


- ① .000030 GOLD IN THE CONTACT AREA,  
.000100-.000200 MATTE TIN-LEAD ON THE  
SOLDER TAIL, ALL OVER .000050 NICKEL
- ② POINT OF MEASUREMENT FOR PLATING THICKNESS
- ③ THE NOTED DIMENSIONS APPLY FROM THE BASIC  
DIMENSION LINE (NOT THE POST CENTERLINE)  
TO THE SURFACE INDICATED
- ④ ON ASSEMBLIES WITH FOUR OR MORE POSITIONS,  
TWO POLARIZATION SLOTS.  
ON ASSEMBLIES WITH TWO OR THREE POSITIONS,  
ONE POLARIZATION SLOT.

.025 ± .001 TYP  
 .015 (M) TYP AT POST TIPS

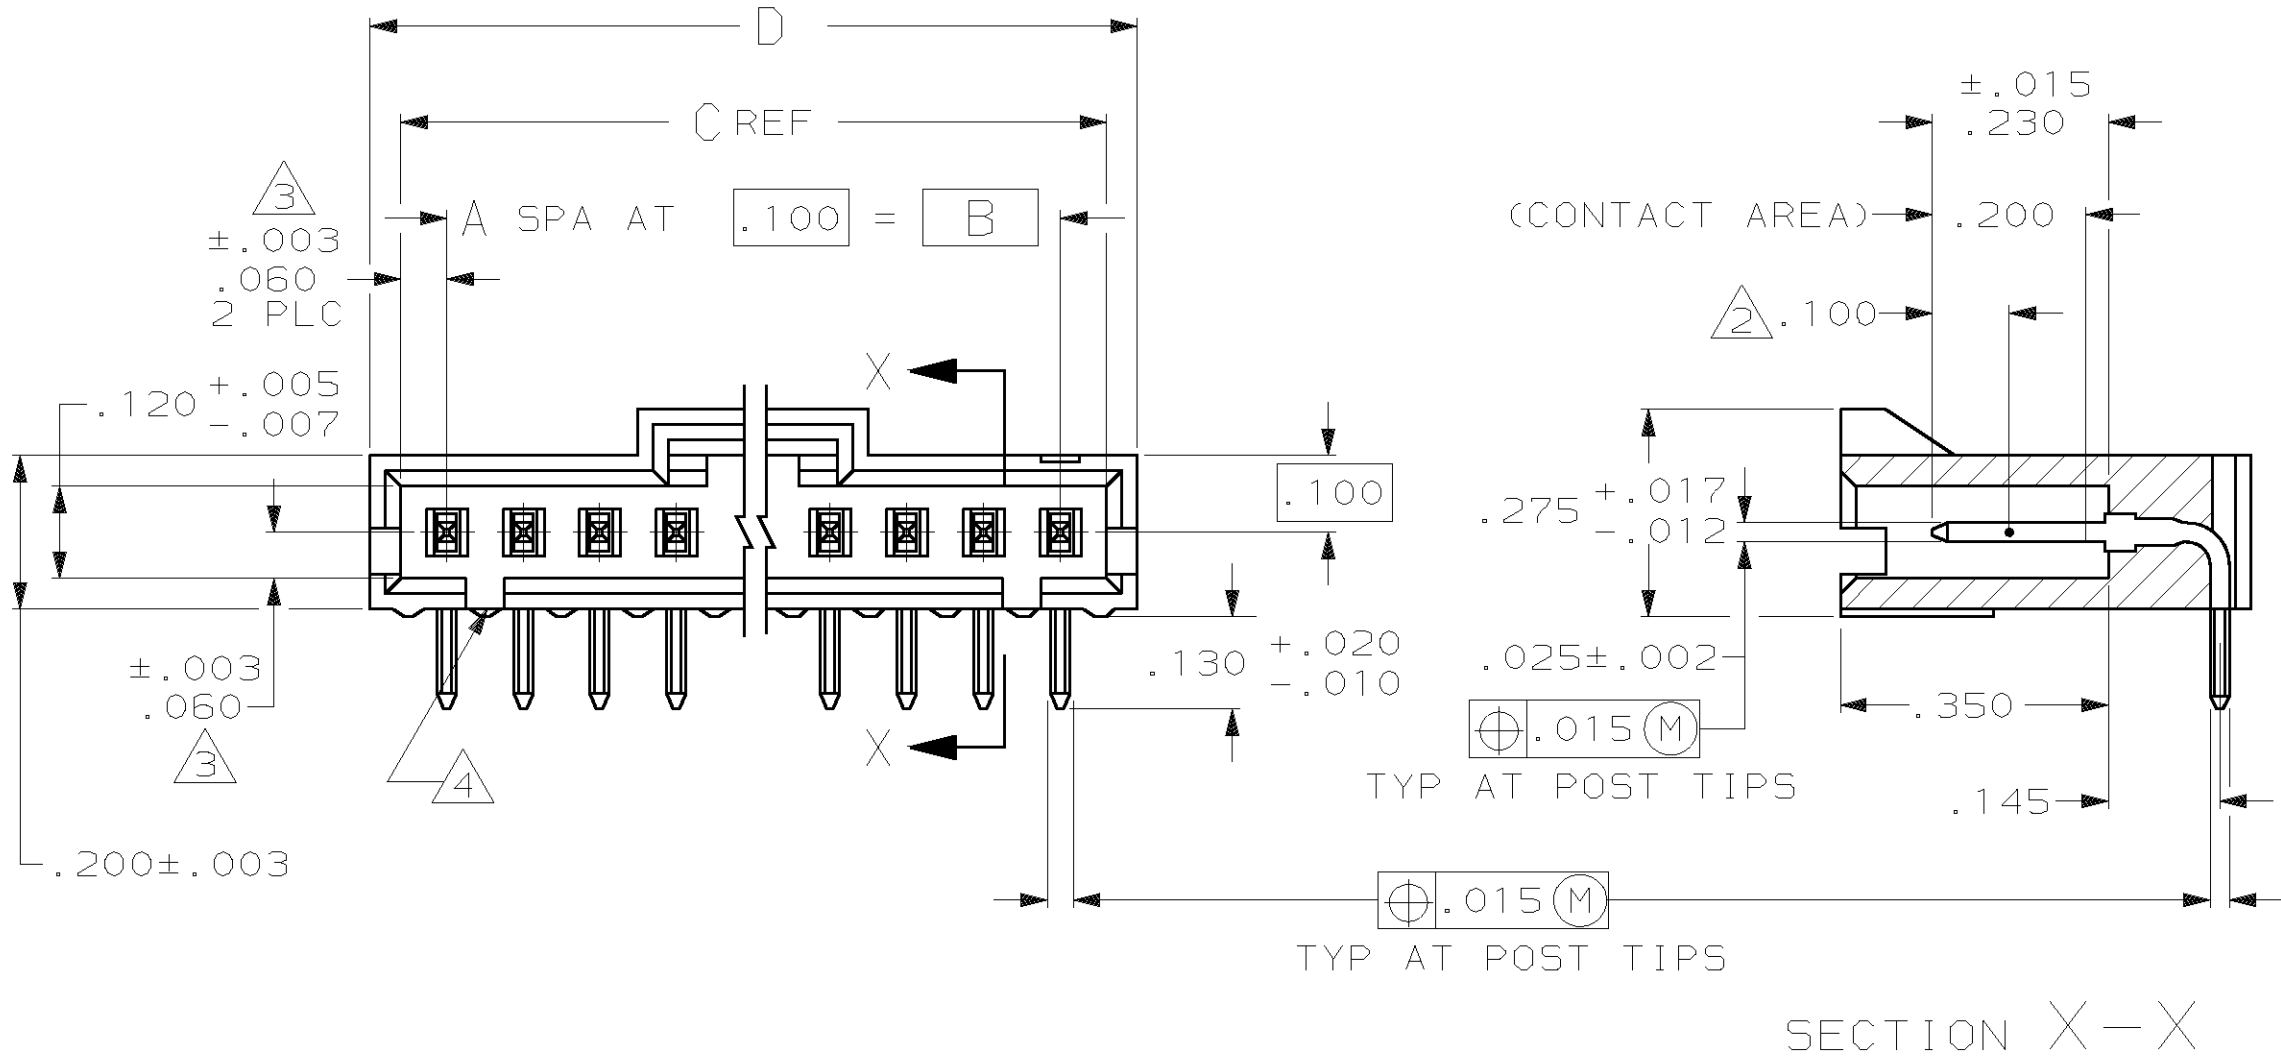

2.600	2.520	2.400	24	25	2-103906-4
2.500	2.420	2.300	23	24	2-103906-3
2.400	2.320	2.200	22	23	2-103906-2
2.300	2.220	2.100	21	22	2-103906-1
2.200	2.120	2.000	20	21	2-103906-0
2.100	2.020	1.900	19	20	1-103906-9
2.000	1.920	1.800	18	19	1-103906-8
1.900	1.820	1.700	17	18	1-103906-7
1.800	1.720	1.600	16	17	1-103906-6
1.700	1.620	1.500	15	16	1-103906-5
1.600	1.520	1.400	14	15	1-103906-4
1.500	1.420	1.300	13	14	1-103906-3
1.400	1.320	1.200	12	13	1-103906-2
1.300	1.220	1.100	11	12	1-103906-1
1.200	1.120	1.000	10	11	1-103906-0
1.100	1.020	.900	9	10	103906-9
1.000	.920	.800	8	9	103906-8
.900	.820	.700	7	8	103906-7
.800	.720	.600	6	7	103906-6
.700	.620	.500	5	6	103906-5
.600	.520	.400	4	5	103906-4
.500	.420	.300	3	4	103906-3
.400	.320	.200	2	3	103906-2
.300	.220	.100	1	2	103906-1
D	C	B	A	NO OF POS	ASSEMBLY PART NUMBER

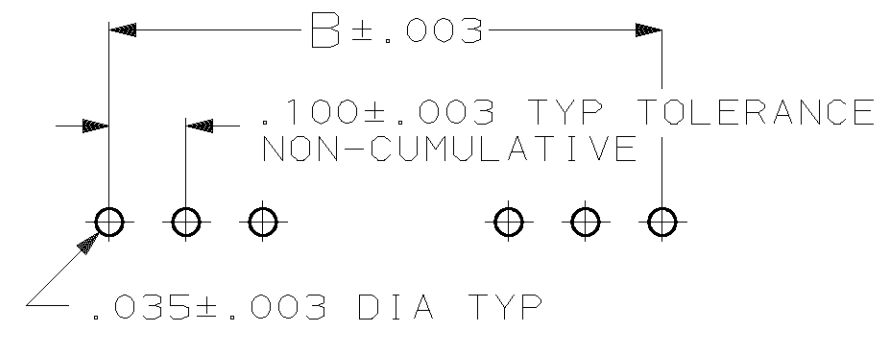

RECOMMENDED HOLE LAYOUT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES  
 TOLERANCES ON:  
 2 PL DEC ± -  
 3 PL DEC ± .005  
 ANGLES ± -  
 MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC COLOR - BLACK  
 CONTACTS: BRASS  
 FINISH: POST: ①

DR 4-30-86 LA MAYER  
 CHK 4-30-86 P deJONG  
 APPD 4-30-86 P deJONG  
 APPD 4-30-86 C LINDGREN  
 PRODUCT SPEC 108-25034  
 APPLICATION SPEC -  
 WEIGHT -

**AMP** AMP INCORPORATED Harrisburg, Pa. 17105

NAME  
 ASSY, AMPMODU MTE, HEADER, RIGHT  
 ANGLE, SINGLE ROW, .100¢,  
 .025 SQ POST, WITH LATCH

SIZE **C** F5CM NO 00779 DRAWING NO 103906

SCALE 4:1 SHEET 1 OF 1