

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

,1998

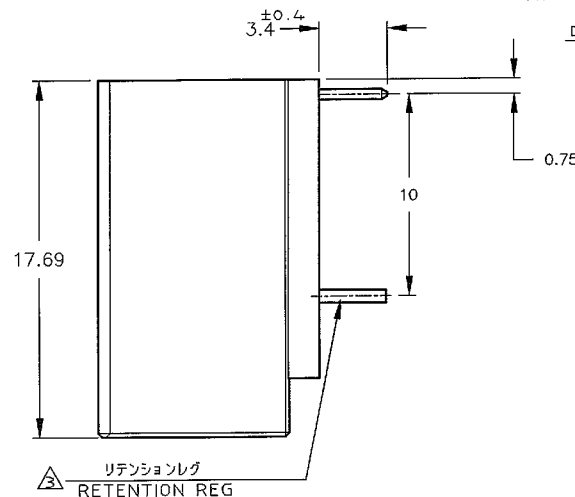
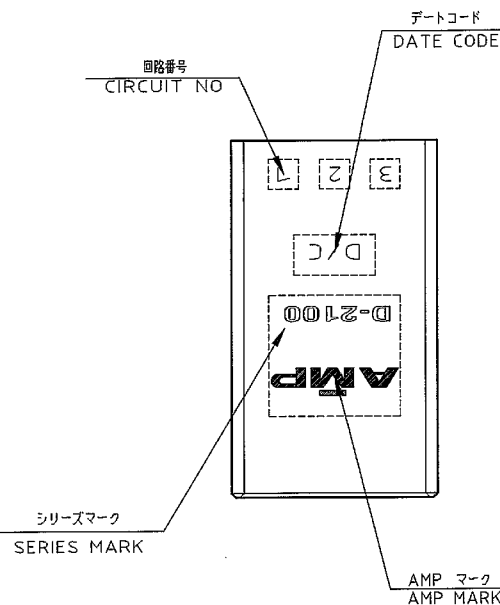
© COPYRIGHT 1998

BY AMP INCORPORATED, ALL RIGHTS RESERVED.

LOC DIST



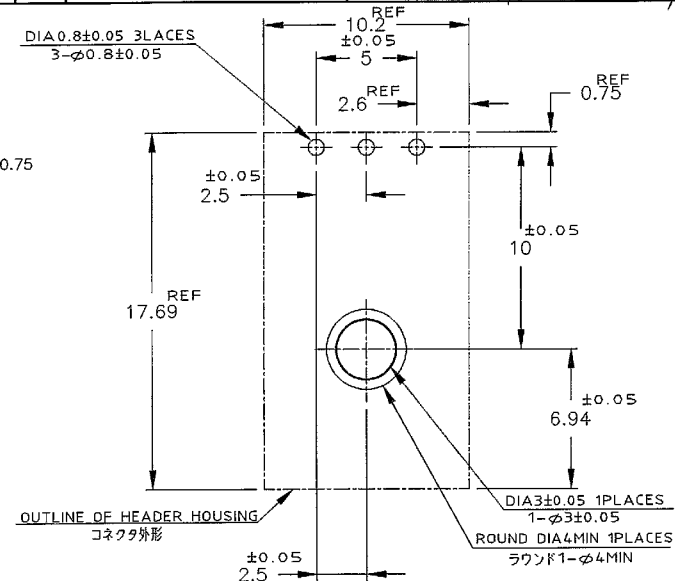
REVISIONS

P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
0		RELEASED	FJ00-1755-99	28FEB'00	K.I.H.	
A		REVISED	FJ00-1080-00	21SEP'00	Y.K.S.M.	
B		REVISED	FJ00-2536-02	5DEC'02	T.S.S.M.	
C		REVISED	FJ00-0039-03	6/2/03	T.S.S.M.	



NOTES

1. MATERIAL: HOUSING: GLASS FILLED THERMO PLASTIC, POLYESTER (94V-0), COLOR: BLACK
TAB CONTACT: COPPER ALLOY
RETENTION LEG: BRASS
2. FINISH (CONTACT AREA): 0.38 μm MIN GOLD PLATING OVER NI PLATING
3. FINISH (RETENTION LEG): TIN PLATED (CONTACT TAIL) OVER NICKEL

1376135-2
(KEYING Y)
SCALE: 2-11376135-3
(KEYING Z)
SCALE: 2-1

推奨基板取付け寸法公差: ±0.05

PC 基板厚: 1.6 ± 0.3
(コネクタ搭載面)

RECOMMENDED PC BOARD HOLE PATTERN (TOL: ±0.05)

PC BOARD THICKNESS: 1.6 ± 0.3
(CONNECTOR MOUNT SIDE)

注記

1. 材料: ハウジング: ガラス入り熱可塑性

ポリエスチル樹脂 (94V-0), 色: 黒

タブ コンタクト: 銅合金

リテンション レグ: 黄銅



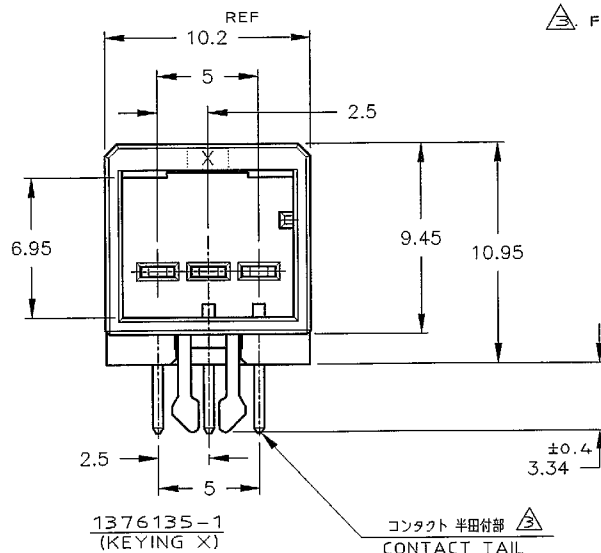

めっき: コンタクト: 全面Ni下地

接触部: 0.38 μm MIN 金めっき



めっき: リテンションレグとコンタクト半田付部

: ニッケル下地の上にスズめっき

1376135-1
(KEYING X)コンタクト 半田付部
CONTACT TAILTHIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING
ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.DIMENSIONS:
単位: mmTOLERANCES UNLESS
OTHERWISE SPECIFIED

1φ	±0.3
2φ	±0.35
3φ	±0.4
10φ	±0.4
ANGLE	±3°

MATERIAL

注記参照
SEE NOTES

FINISH

注記参照
SEE NOTESKIKEDA
CHK
Y.KATO
24/FEB/'00
28/FEB/'00
28/FEB/'00

I.HASEGAWA

PRODUCT SPEC

108-5619

APPLICATION SPEC

114-5258

取付適用規格

WEIGHT

CUSTOMER DRAWING

tyco
ElectronicsTyco Electronics AMP K.K.
Kawasaki, Japan

NAME 1別 ヘッダーアセンブリ 3P

6号

(水平タイプ)

SINGLE ROW HEADER ASS'Y 3P ("H" TYPE)

<DYNAMIC D-2100S>

SIZE A3

CAGE CODE 00779

DRAWING NO

C-1376135

RESTRICTED TO

SCALE 4-1

SHEET 1

OF 1

REV C