


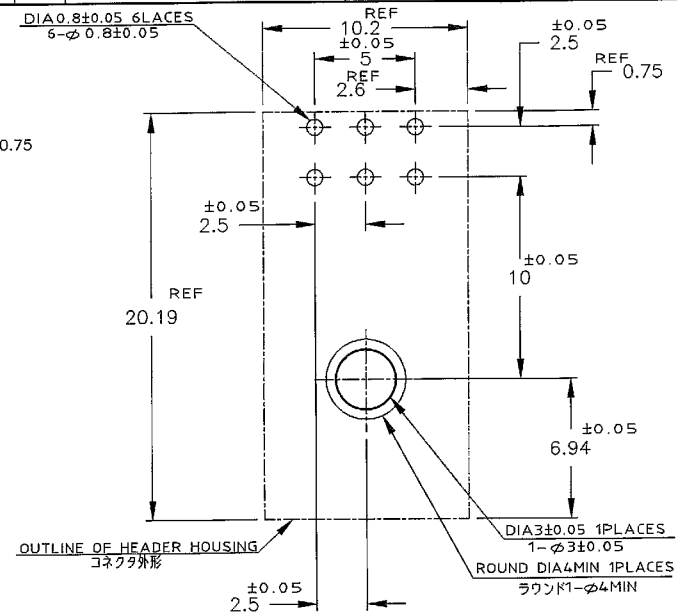


推奨基板取付け穴寸法 (公差 ± 0.05)

PC 基板厚: 1.6 ± 0.3
(コネクタ搭載面)

RECOMENDED PC BOARD HOLE PATTERN(TOL:±0.05)
PC BOARD THICKNESS:1.6±0.3
(CONNECTOR MOUNT SIDE)

△3. めっき: リテンションレグとコンタクト半田付部
: ニッケル下地の上にスズめっき



THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN 24/FEB/'00 K.KIKEDA CHK 28/FEB/'00 Y.KATO APVD 28/FEB/'00 H.HASEGAWA PRODUCT SPEC 部品規格 108-5619 APPLICATION SPEC 動作適用規格 114-5258		tyco Electronics Tyco Electronics AMP K.K. Kawasaki, Japan	
DIMENSIONS: 寸法 単位 mm		TOLERANCES UNLESS OTHERWISE SPECIFIED 一般公差 1% ± 0.3 3% ± 0.35 10% ± 0.4 ANGLE: $\pm 3'$		NAME 2列 ヘッダーアセンブリー 6P 名称 (水平タイプ) DOUBLE ROW HEADER ASS'Y 6P ("H" TYPE) <DYNAMIC D-2100D>	
		MATERIAL 注記参照 材料 SEE NOTES		FINISH 注記参照 仕上 SEE NOTES	
WEIGHT $\frac{1}{1}$		SIZE A3 CAGE CODE 00779 DRAWING NO 4-1 図号 C-1376136		RESTRICTED TO - SCALE 4-1 SHEET 1 OF 1 REV B	
CUSTOMER DRAWING					