
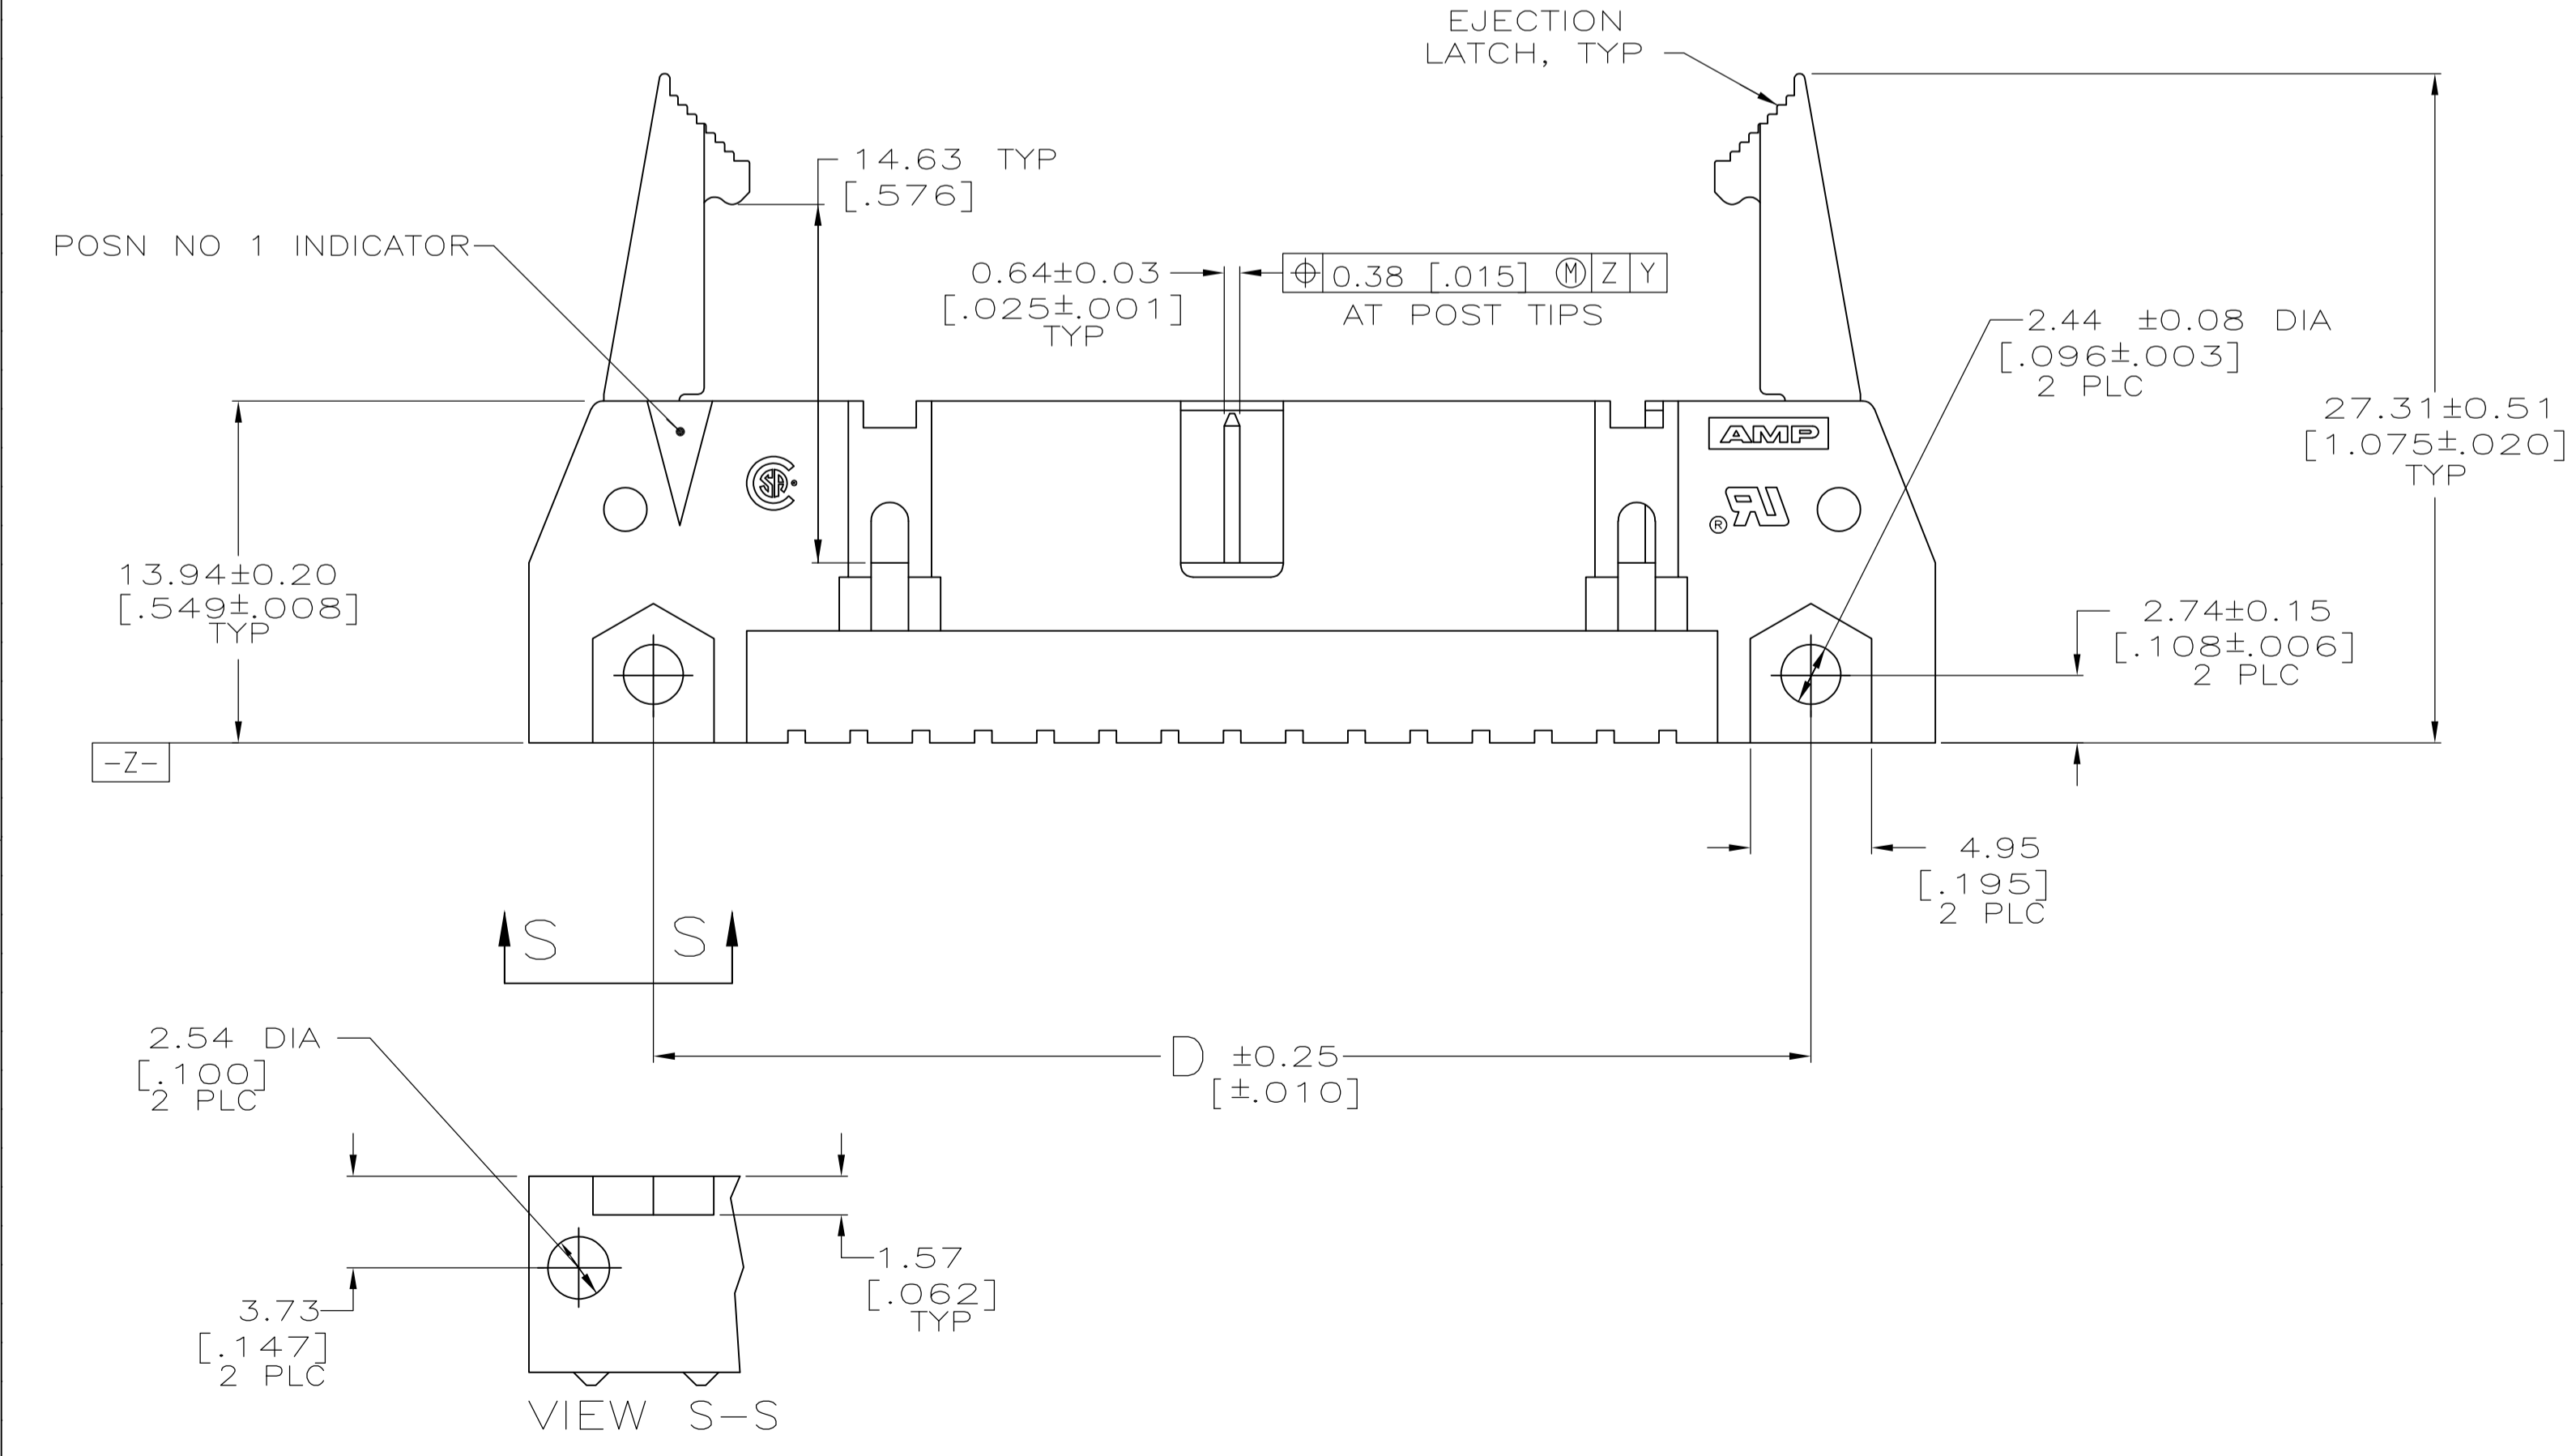
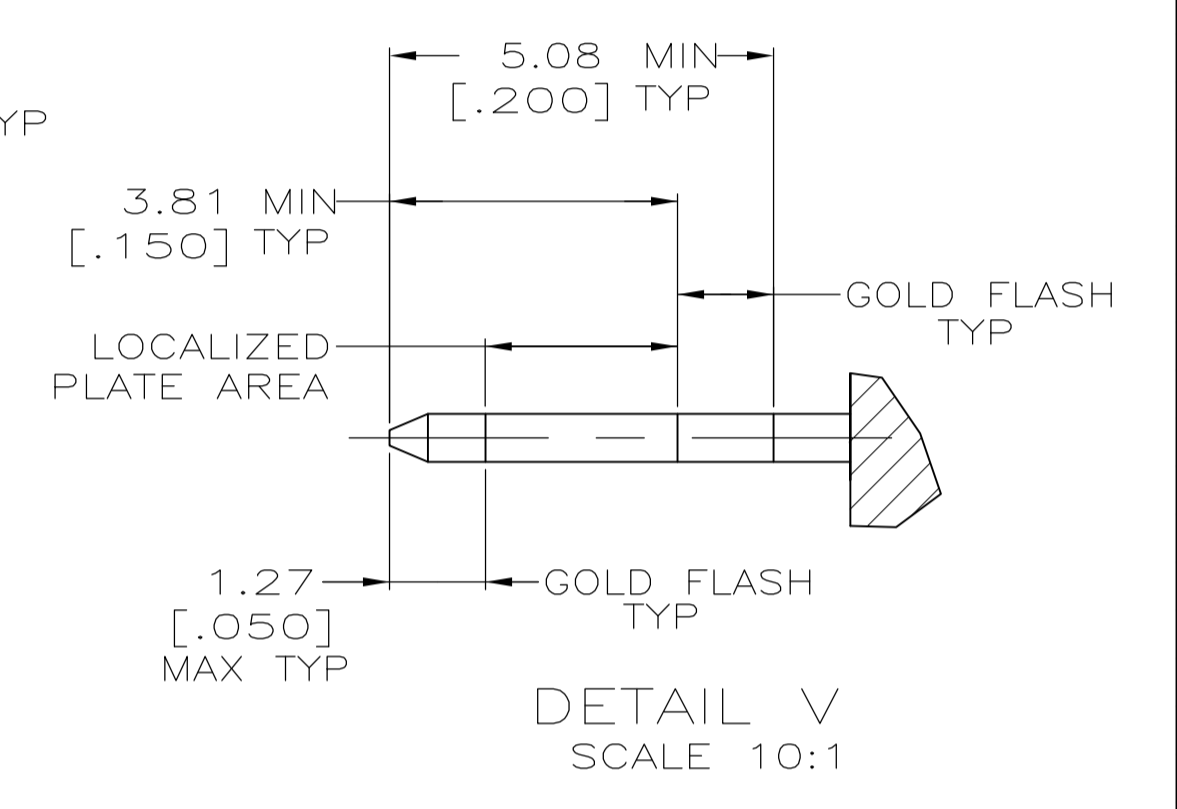
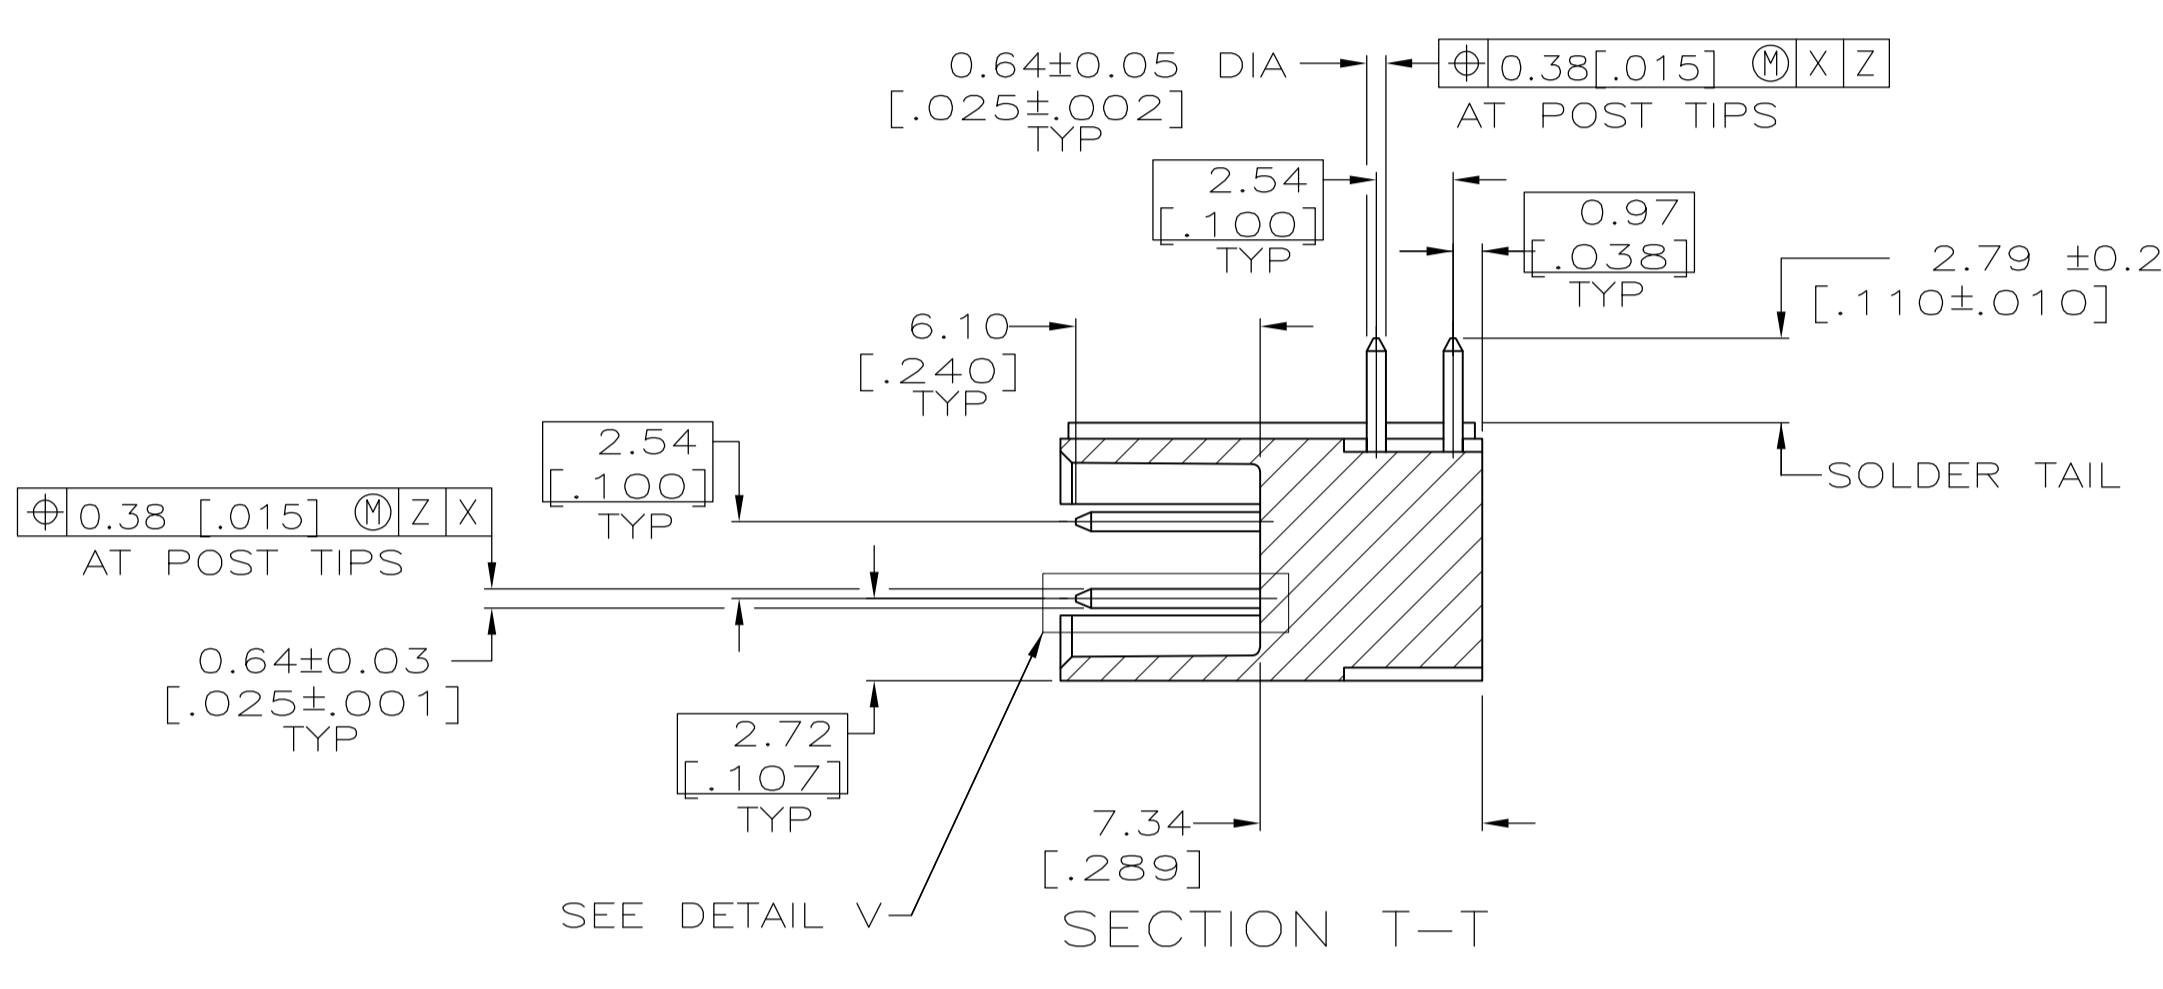


- 1. COORDINATE DIMENSION APPLIES FROM BASIC LOCATION.
- 2. 10 AND 14 POSITION SIZES CONTAIN ONLY ONE SLOT FOR SNAP-IN POLARIZER (MILITARY POLARIZATION) LOCATED AS SHOWN.
- 3. 10 POSITION SIZES CONTAIN ONLY ONE SLOT FOR DUAL POLARIZATION, LOCATED AS SHOWN.
- 4. RECOMMENDED PRINTED CIRCUIT BOARD THICKNESS IS 1.57 [0.062].
- 5. DISTANCE REQUIRED BY EJECTION LATCHES IN THE OPEN POSITION.
- 6. POSTS: GOLD FLASH OVER PALLADIUM-NICKEL PLATE, 0.76µm [0.00030] MIN TOTAL ON THE LOCALIZED PLATE AREA, 2.54µm [0.00100] MIN TIN OR TIN-LEAD PLATE ON THE TAIL, 1.27µm [0.00050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.  
 -OR-  
 0.76µm [0.00030] MIN GOLD PLATE ON THE LOCALIZED PLATE AREA, 2.54µm [0.00100] MIN TIN OR TIN-LEAD PLATE ON THE TAIL, 1.27µm [0.00050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.

EJECTION LATCHES OMITTED IN THIS VIEW FOR CLARITY

RECOMMENDED PC BOARD MOUNTING DIMENSIONS SCALE 2:1

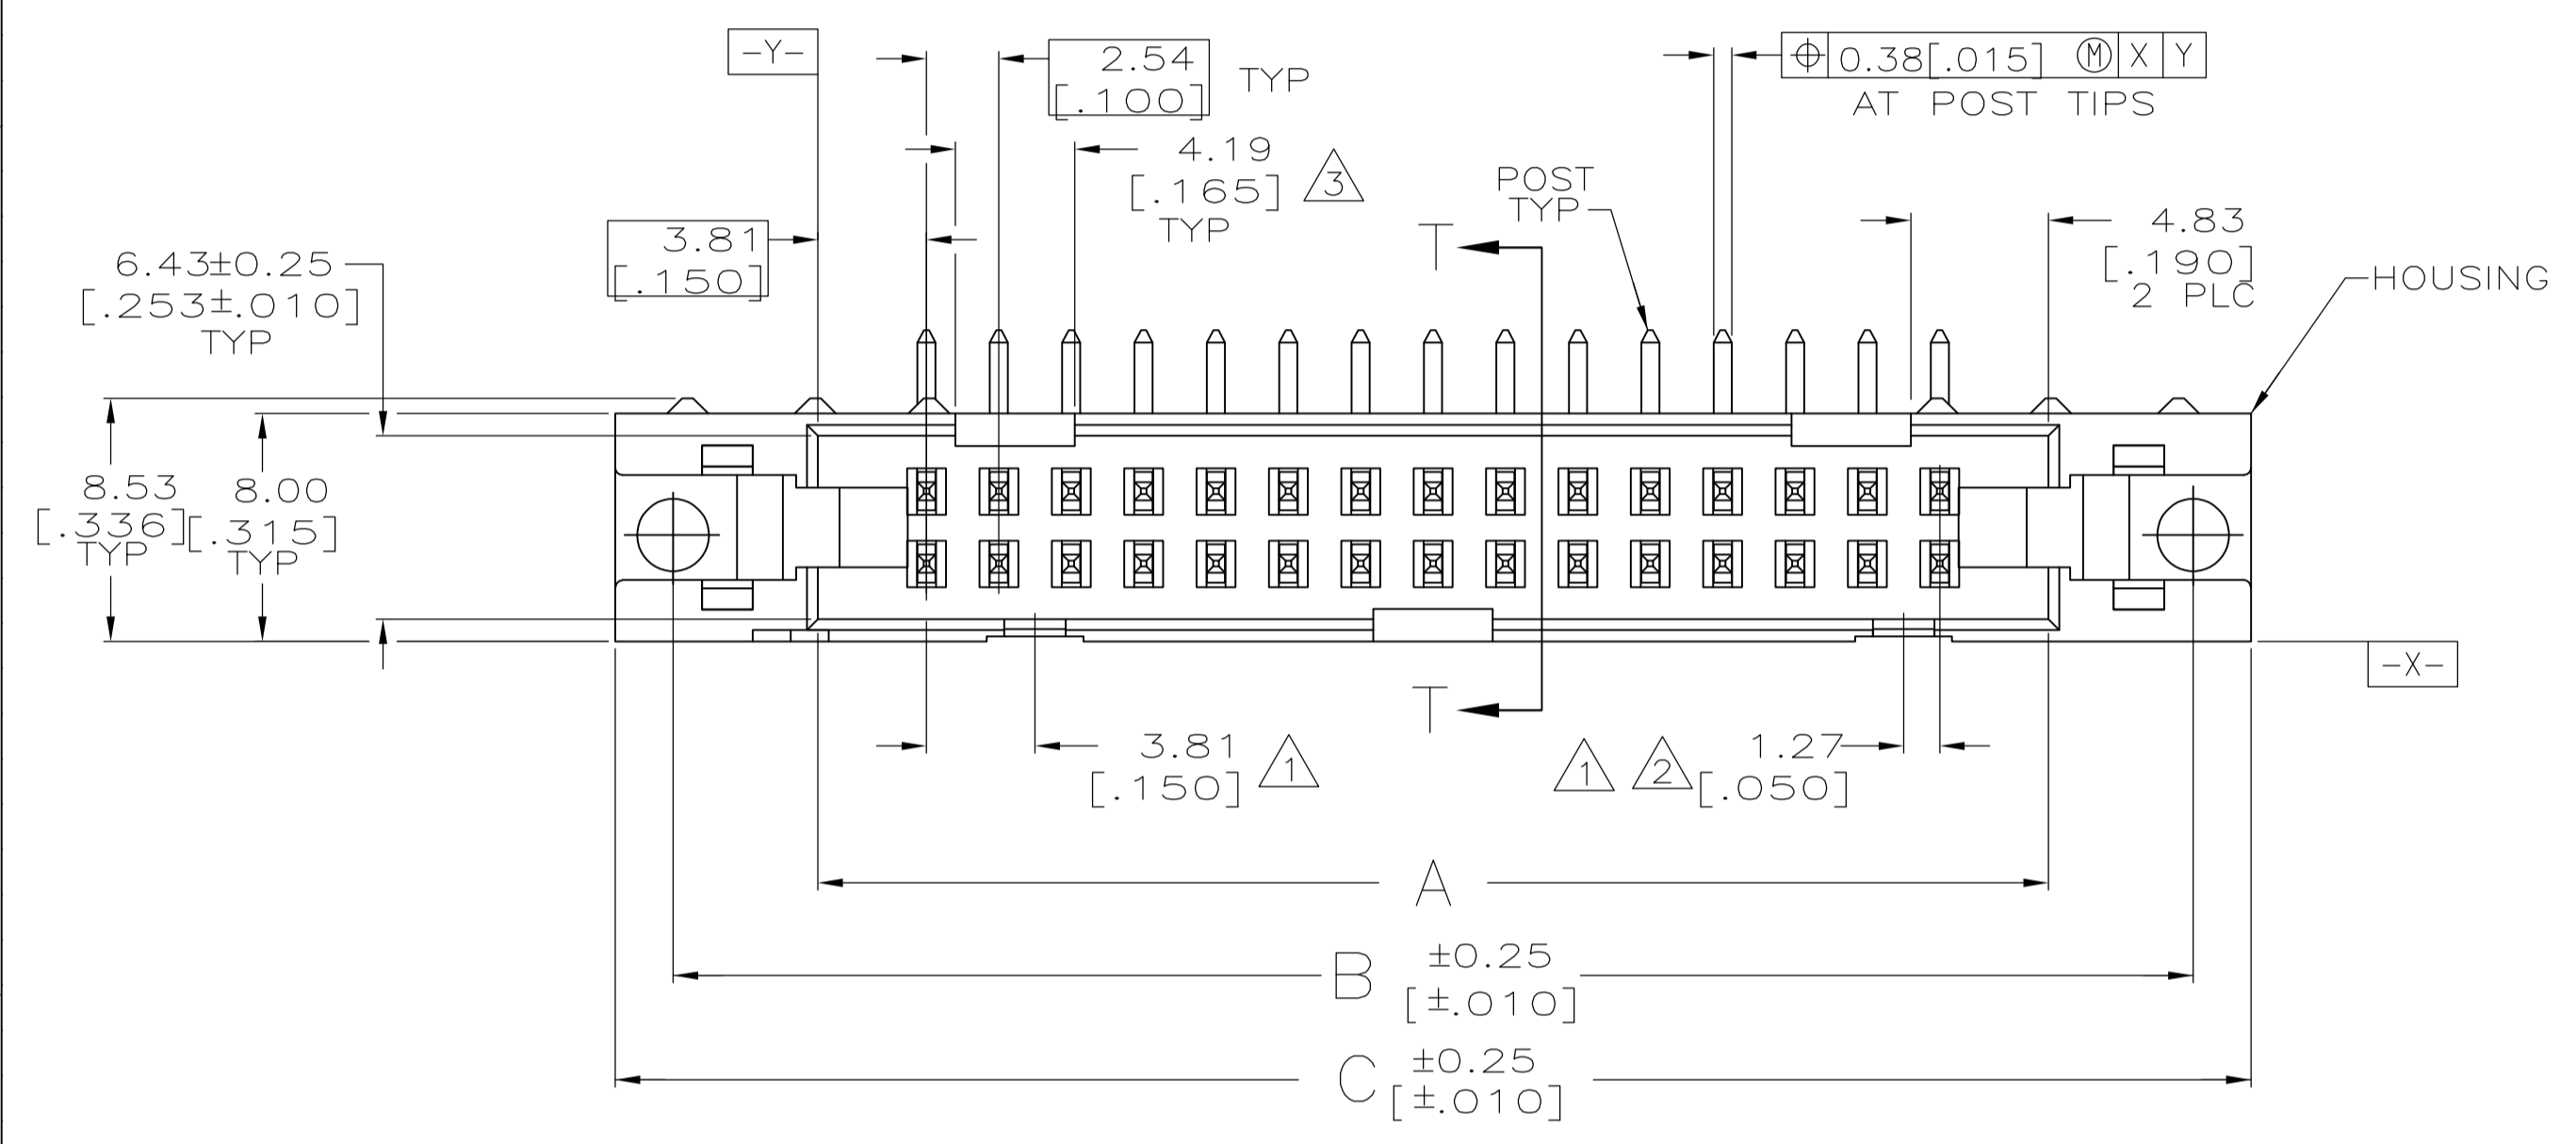

OBSOLETE	53.34	65.02	65.02	75.18	71.12	60.96	44	1-499141-3								
	[2.100]	[2.560]	[2.560]	[2.960]	[2.800]	[2.400]										
	78.74	90.42	90.42	100.58	96.52	86.36			64	1-499141-2						
	[3.100]	[3.560]	[3.560]	[3.960]	[3.800]	[3.400]										
	73.66	85.34	85.34	95.50	91.44	81.28					60	1-499141-1				
	[2.900]	[3.360]	[3.360]	[3.760]	[3.600]	[3.200]										
	60.96	72.64	72.64	82.80	78.74	68.58							50	1-499141-0		
	[2.400]	[2.860]	[2.860]	[3.260]	[3.100]	[2.700]										
	48.26	59.94	59.94	70.10	66.04	55.88									40	499141-9
	[1.900]	[2.360]	[2.360]	[2.760]	[2.600]	[2.200]										
40.64	52.32	52.32	62.48	58.42	48.26	34	499141-8									
[1.600]	[2.060]	[2.060]	[2.460]	[2.300]	[1.900]											
35.56	47.24	47.24	57.40	53.34	43.18			30	499141-7							
[1.400]	[1.860]	[1.860]	[2.260]	[2.100]	[1.700]											
30.48	42.16	42.16	52.32	48.26	38.10					26	499141-6					
[1.200]	[1.660]	[1.660]	[2.060]	[1.900]	[1.500]											
OBSOLETE	27.94	39.62	39.62	49.78	45.72							35.56	24	499141-5		
[1.100]	[1.560]	[1.560]	[1.960]	[1.800]	[1.400]											
22.86	34.54	34.54	44.70	40.64	30.48							20			499141-4	
[.900]	[1.360]	[1.360]	[1.760]	[1.600]	[1.200]											
17.78	29.46	29.46	39.62	35.56	25.40	16	499141-3									
[.700]	[1.160]	[1.160]	[1.560]	[1.400]	[1.000]											
15.24	26.92	26.92	37.08	33.02	22.86			14	499141-2							
[.600]	[1.060]	[1.060]	[1.460]	[1.300]	[.900]											
10.16	21.84	21.84	32.00	27.94	17.78					10	499141-1					
[.400]	[.860]	[.860]	[1.260]	[1.100]	[.700]											

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN H. MOLL 4-23-90	APVO S. GOOD 11-29-90	NAME
0 PLC ± -	1 PLC ± -	2 PLC ± 0.13[005]	3 PLC ± -	4 PLC ± -
MATERIAL: HOUSING & LATCHES: GLASS FILLED NYLON OR POLYESTER, 90%+ REIN. POSTS: BRASS		FINISH: 6		

Customer Drawing

Scale: 4:1

Weight: A1

Part Number: 108-40018

Product Spec: 108-40018

Application Spec: 108-40018

Size: A1

Case Code: 00779

Drawing No: 499141

Restricted To: -

Customer Drawing

Scale: 4:1

Sheet: 1 of 1

Rev: K