
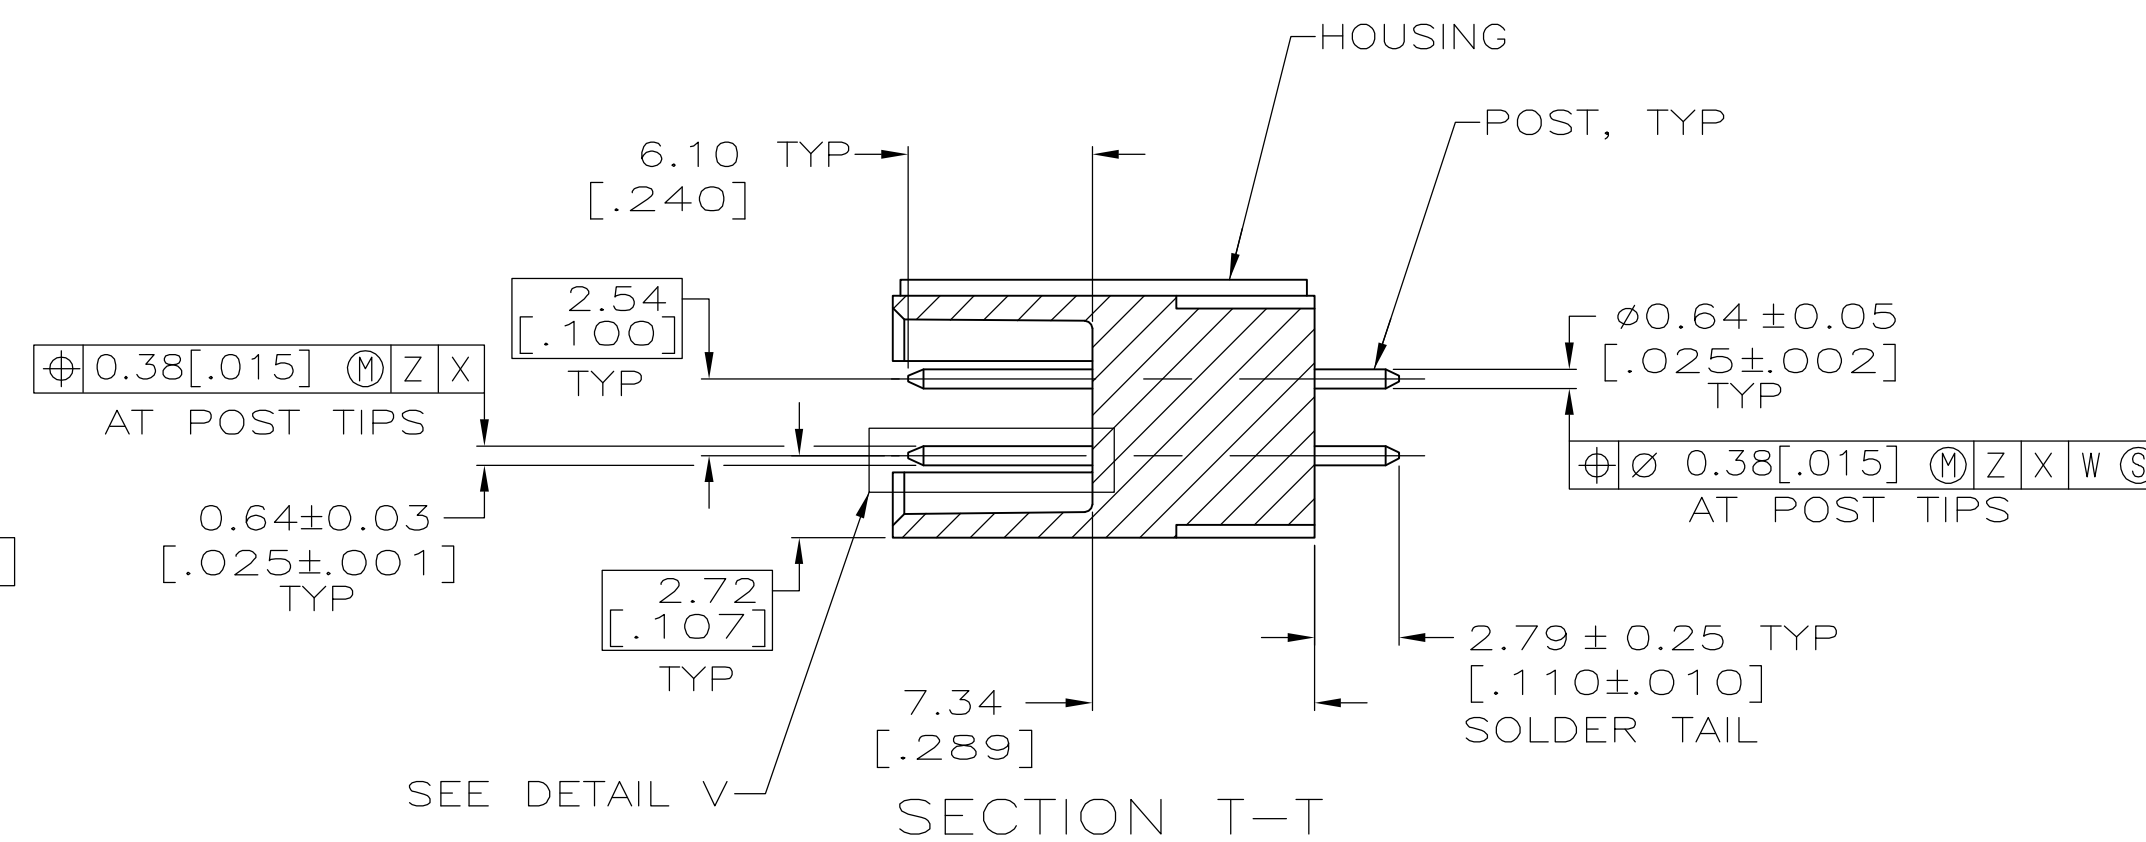


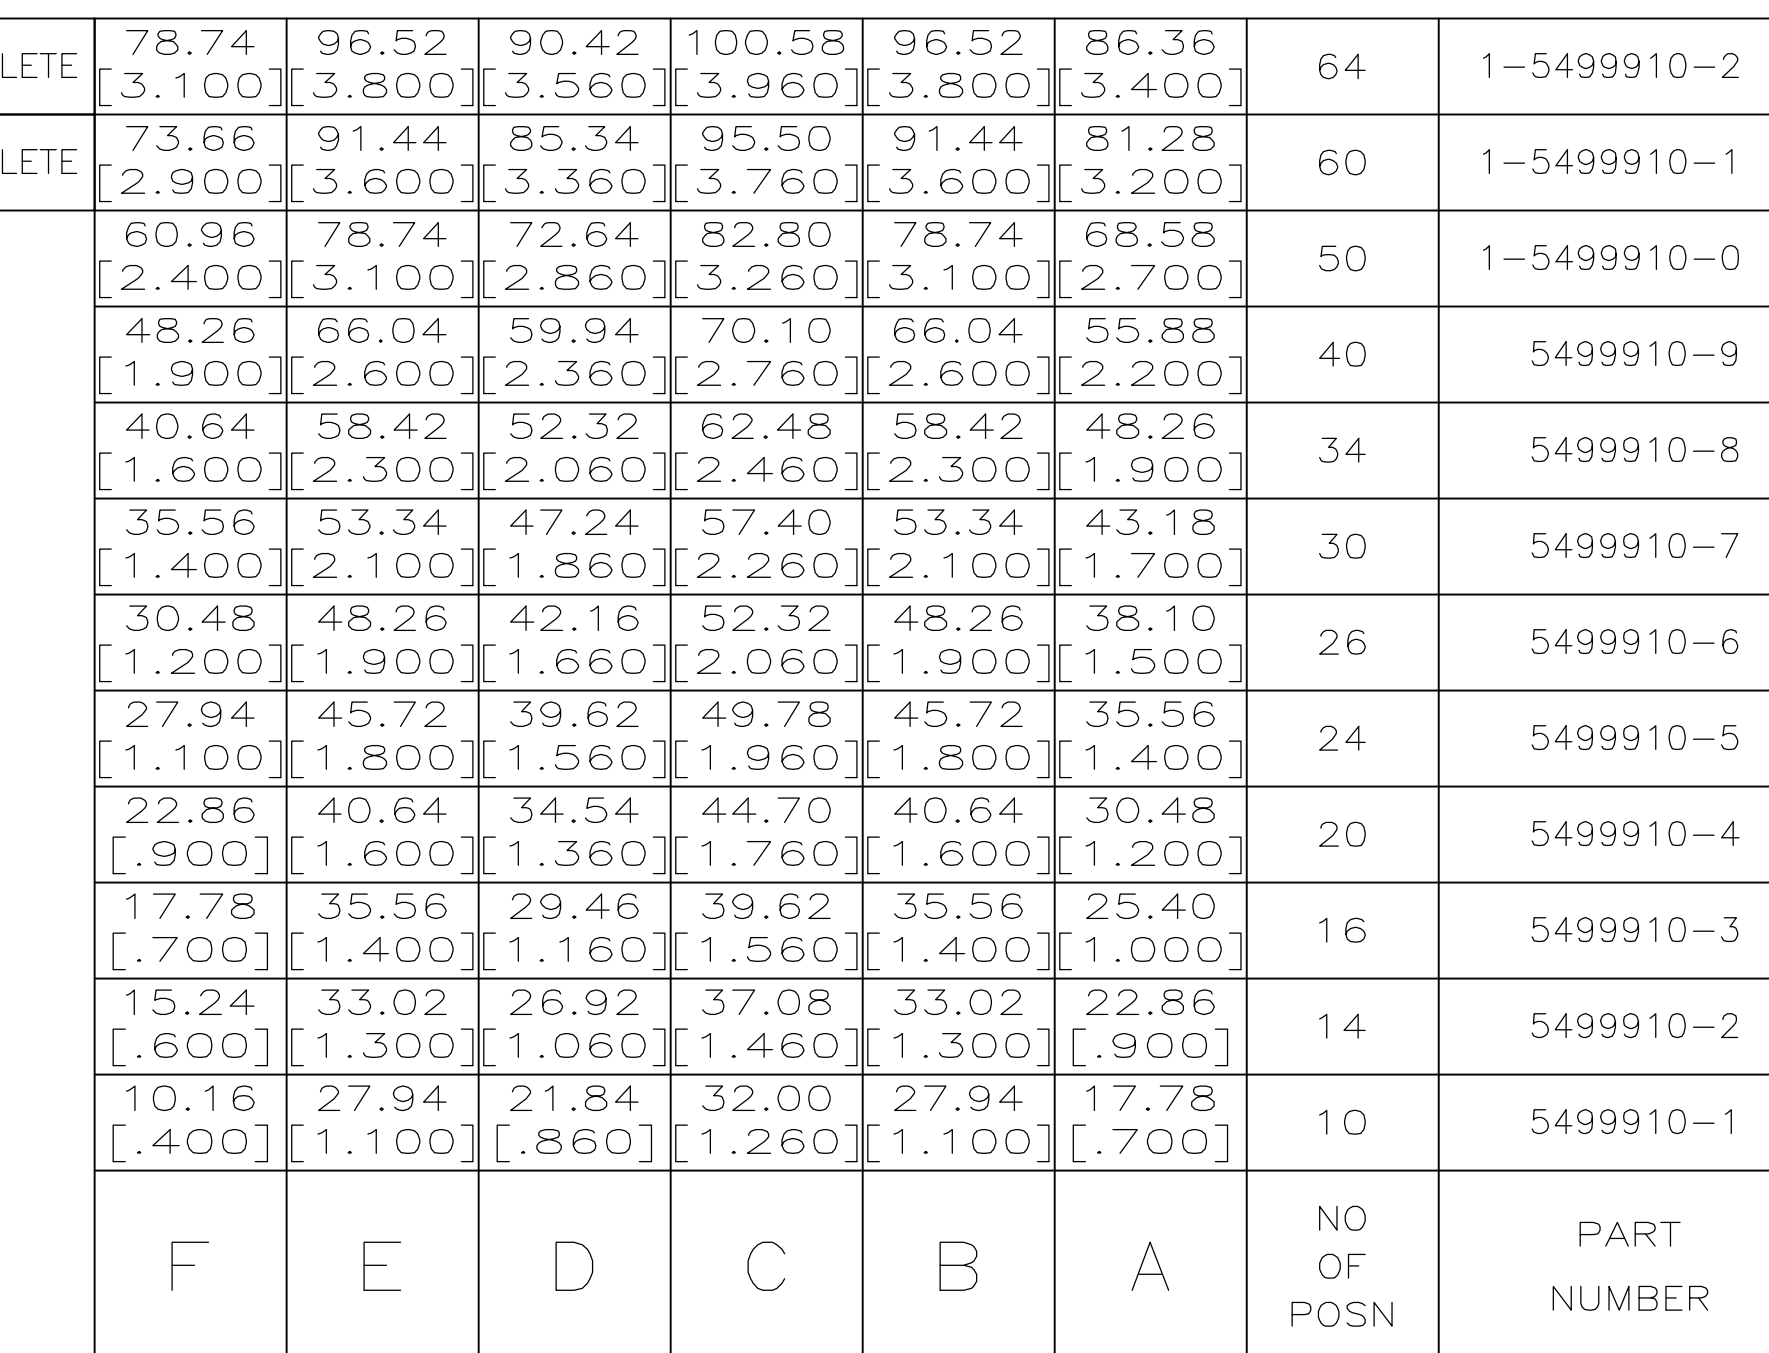

-
- POSN NO 1 INDICATOR
- 10.57 TYP
[.416]
- 0.64±0.03
[.025±.001]
TYP
- 0.38[.015] Z X Y
AT POST TIPS
- EJECTION LATCH, TYP
- Ø2.44±0.08
[.096±.003]
2 PLC
- 23.09±0.51
[.909±.020]
TYP
- 2.74±0.15
[.108±.006]
2 PLC
- 4.95
[.195]
2 PLC
- 5.08 MIN
[.200] TYP
- 3.81 MIN
[.150] TYP
- LOCALIZED
PLATE AREA
- 1.27
[.050]
MAX TYP
- GOLD FLASH
TYP
- GOLD FLASH
TYP
- D ±0.25
[±.010]
- Z-
- AMP
- DETAIL V
SCALE 10:1
- 3 10 P
4. RECO
5. DIST
6. HOUS
POST
7. POST
LOCAL
1.27
-OR-
0.38
2.54
NICK
8. DATU

AMR 4805 REV 31MAR2000