



- Headers (350 & 450) use MM# 3404 pins. See page 170 for details.
- Sockets (310 & 410) use MM# 1005 receptacles and accept pin diameters from .015-.025. See page 135 for details.

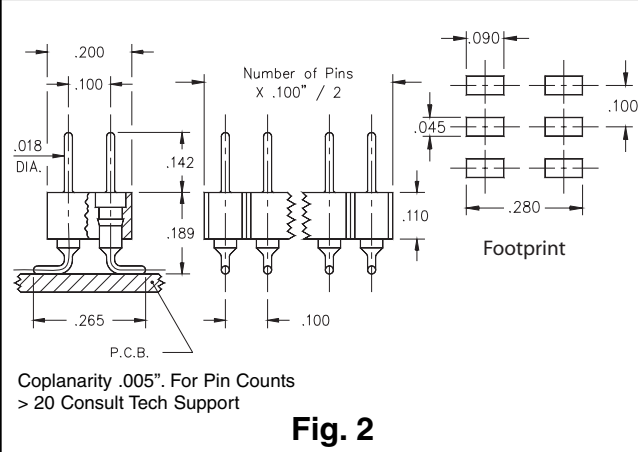


- Coplanarity .005" (Single Row max 10 pins; Double Row max 20 pins) for higher pin counts contact tech support.
- Insulators are high temp. thermoplastic.

**Ordering Information**

<b>Fig. 1L</b>	<b>Single Row Header, Left Hand Footprint Odd or Even # of pins</b>	350-XX-1__-00-106000
	<b>Specify # of pins</b>	02-64
<b>Fig. 1R</b>	<b>Single Row Header, Right Hand Footprint Even # of pins</b>	350-XX-1__-00-107000
	<b>Specify even # of pins</b>	02-64
<b>Fig. 2</b>	<b>Double Row Header, Even # of pins</b>	450-XX-2__-00-106000
	<b>Specify even # of pins</b>	04-72

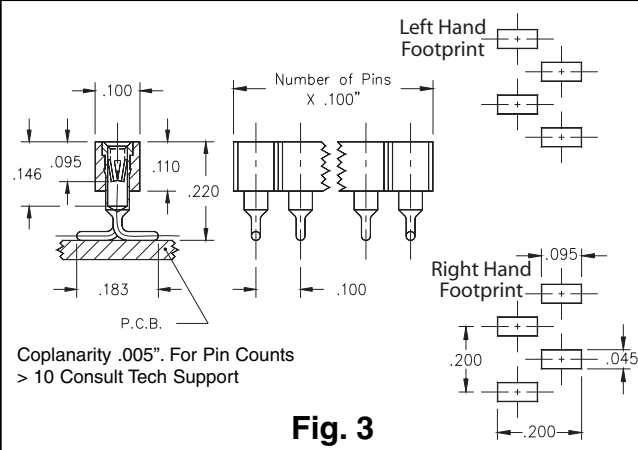

SPECIFY PLATING CODE XX=	10◇	90	40◇
Pin Plating	10μ" Au	200μ" Sn/Pb	200μ" Sn

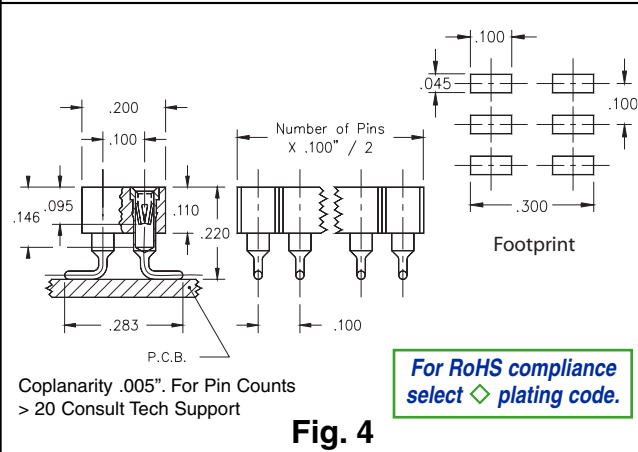

<b>Fig. 3L</b>	<b>Single Row Socket, Left Hand Footprint Odd or Even # of pins</b>	310-XX-1__-41-105000
	<b>Specify # of pins</b>	02-64
<b>Fig. 3R</b>	<b>Single Row Socket, Right Hand Footprint Even # of pins</b>	310-XX-1__-41-107000
	<b>Specify even # of pins</b>	02-64
<b>Fig. 4</b>	<b>Double Row Socket, Even # of pins</b>	410-XX-2__-41-105000
	<b>Specify even # of pins</b>	04-72

*For RoHS compliance select ◇ plating code.*

SPECIFY PLATING CODE XX=	13◇	93	99	43◇	44◇
Sleeve (Pin)	10μ" Au	200μ" Sn/Pb	200μ" Sn/Pb	200μ" Sn	200μ" Sn
Contact (Clip)	30μ" Au	30μ" Au	200μ" Sn/Pb	30μ" Au	200μ" Sn