
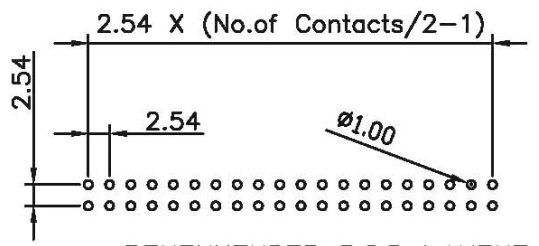


Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Dielectric Withstanding: AC 1000 V
 Operating Temperature: - 40° ~ +105° C
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: PBT
 Underplate: Nickel
 Contact Area: 1u"~30u" Selective Gold
 Solder Tails Area: 100u" Tin/Lead(Brighten Tin)or
 100u" Tin/Lead Free(Brighten Tin/Matte Tin)

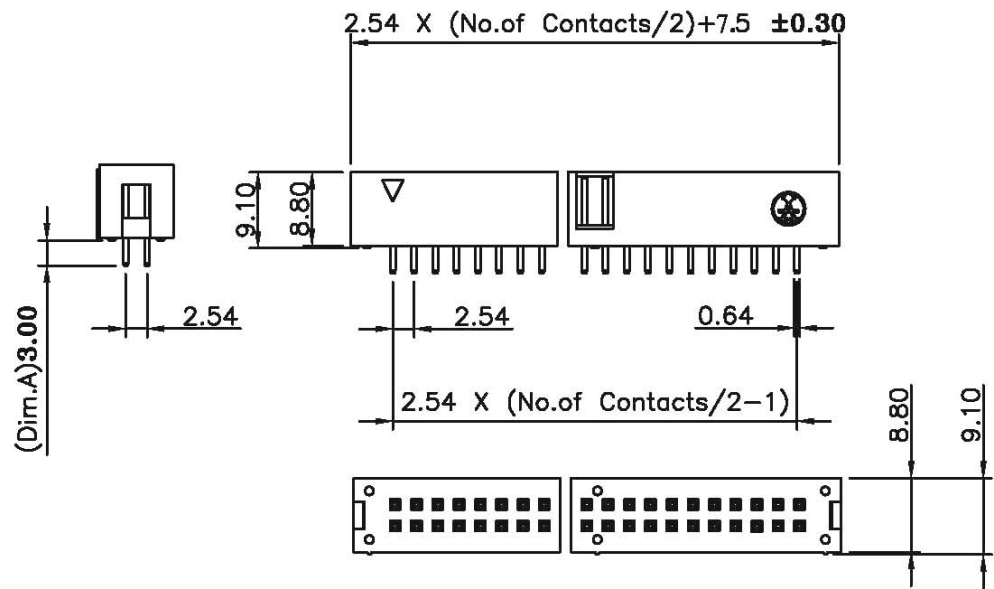

RENOMMENDED P.C.B LAYOUT
 TOLERANCES: ±0.05mm

AWHWxxG-0102-T-R
 30u" of Gold
 AWHWxxG-0202-T-R
 Flash Gold

UNLESS OTHERWISE SPECIFIED TOLERANCE		±0.2		
SCALE: AS SHOWN	UNIT: mm			
DRAWN	JOE	DATE	12/19/05	DRAWN NAME:
CHECKED	/ /			BOX HEADER (PITHC: 2.54mm) 1/2
APPROVED	/ /	DATE	12/13/05	PRODUCT NO.
		SIZE	A4	REV.
		REV.	A	FILE NAME:

REV.	A	ECN-0512106(Emily)	DESCRIPTION	DATE	12/13/05
------	---	--------------------	-------------	------	----------