

A B C D E


NO. OF CONTACTS	DIMENSIONS	
	B	A
2	4	2
3	6	4
4	8	6
5	10	8
6	12	10
7	14	12
8	16	14
9	18	16
10	20	18
11	22	20
12	24	22
13	26	24
14	28	26
15	30	28
16	32	30
17	34	32
18	36	34
19	38	36
20	40	38
21	42	40
22	44	42
23	46	44
24	48	46
25	50	48
26	52	50
27	54	52
28	56	54
29	58	56
30	60	58
31	62	60
32	64	62
33	66	64
34	68	66
35	70	68
36	72	70
37	74	72
38	76	74
39	78	76
40	80	78

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator Resistance: 5000 Megohms min.
 Dielectric Withstanding: 500VAC
 Operating Temperature: -40 Degrees C. to +105 Degrees C.
 Contact Material: Brass
 Insulator Material: PBT, UL 94V-0
 Contact Finish: Overall Gold or Selective Plating Gold/Tin

Standard Part is:
 PBT
 Overall Gold Flash plating

Contact Sullins Electronics for additional plating options available.

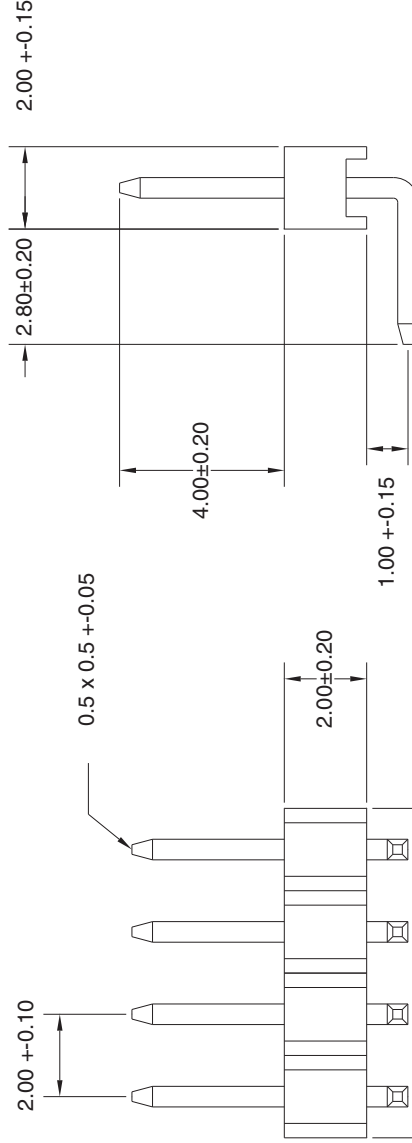

To complete the part number, replace "xx" with number of contacts. The 3rd letter in the part number designates plating. Insert:
 P = Gold flash all over
 Z = 10u" selective Gold / Tin on Tail
 W = Selective Gold Flash / Tin on tail
 X = A30u" selective gold / Tin on tail

A 11-27-02 Added information notes

Sullins 801 E. MISSION RD. SAN MARCOS, CA 92069		DWG. NO. T0015		TITLE PR_Nxx1PARN		REV. A	
GENERAL TOLERANCE		SCALE 6:1		DATE		DRAWN	
XX. +	.XXX. +	UNIT MM		CHECK		APPROVE	
X. +	.XXX +	SIZE A4		DATE		DATE	
.X +	.X.β +	APPROVE		DATE		DATE	
.XX +	.Xβ +	APPROVE		DATE		DATE	

1

2

3

A B C D E