
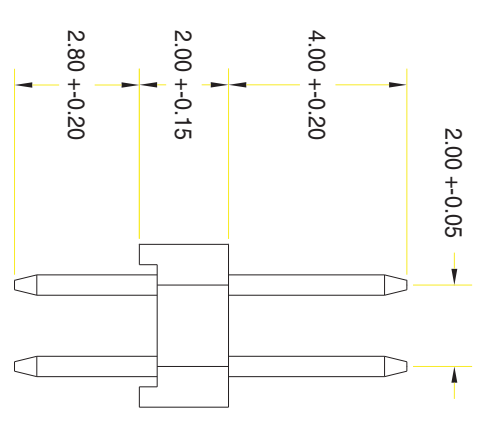
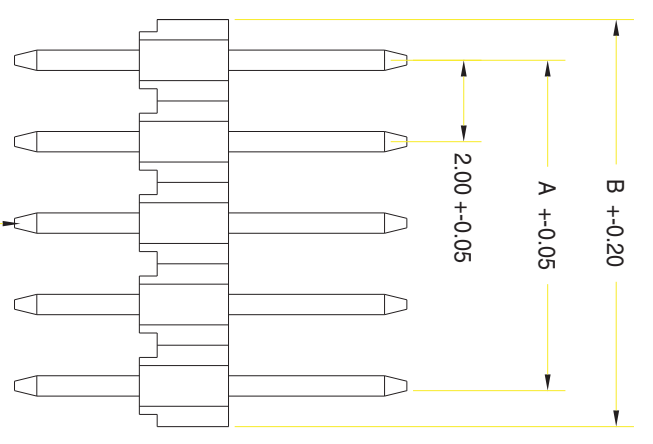


No. of Contacts	DIMENSIONS	
	A	B
4	2.00	4.00
6	4.00	6.00
8	6.00	8.00
10	8.00	10.00
12	10.00	12.00
14	12.00	14.00
16	14.00	16.00
18	16.00	18.00
20	18.00	20.00
22	20.00	22.00
24	22.00	24.00
26	24.00	26.00
28	26.00	28.00
30	28.00	30.00
32	30.00	32.00
34	32.00	34.00
36	34.00	36.00
38	36.00	38.00
40	38.00	40.00
42	40.00	42.00
44	42.00	44.00
46	44.00	46.00
48	46.00	48.00
50	48.00	50.00
52	50.00	52.00
54	52.00	54.00
56	54.00	56.00
58	56.00	58.00
60	58.00	60.00
62	60.00	62.00
64	62.00	64.00
66	64.00	66.00
68	66.00	68.00
70	68.00	70.00
72	70.00	72.00
74	72.00	74.00
76	74.00	76.00
78	76.00	78.00
80	78.00	80.00

-yucpa PIN DIM. B +0.50

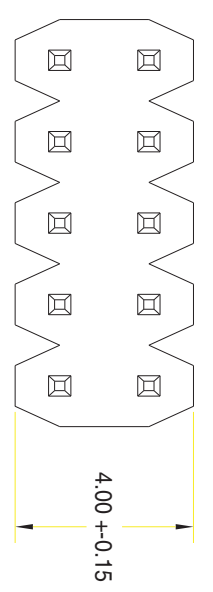

Note that "xx" in part number designates number of dual positions, not total contacts.

SPECIFICATIONS
 Current Rating: 1 Amp
 Insulator Resistance: 5000 Mega Ohm Min.
 Dielectric withstanding: 500 VAC
 Operating Temperature: -40 Degrees C. to +105 Degrees C.
 Contact Material: Brass or Phosphor bronze
 Insulator Material: Polyester, UL 94V-0 Standard: P.B.T
 Contact Finish: Gold/Tin, Selective Plating

SULLINS
 801 E. MISSION RD.
 SAN MARCOS, CA 92069

GENERAL TOLERANCE		SCALE	NTS	DRAWN	DATE	DWG. NO.	TITLE	REV.
XX, +	XXX, +	UNIT	MM	CHECK	04.18.2000	T0030		
X, +	.XXX, +	SIZE		APPROVE	DATE	PARTS NO.		SHEET
XX, +	X.B, +				DATE	PRPNXX2PAEN		
XX, +	.X.B, +							