

PART NUMBER CODING

G C DABN - M30


NUMBER OF POSITIONS PER ROW

PLATING


ALL PLATINGS HAVE .000050" NICKEL UNDERPLATE

CONTACT TERMINATION

- B = .000010" GOLD .000100" PURE TIN, MATTE
- C = .000030" GOLD .000100" PURE TIN, MATTE
- E = .000100" PURE TIN, MATTE OVERALL

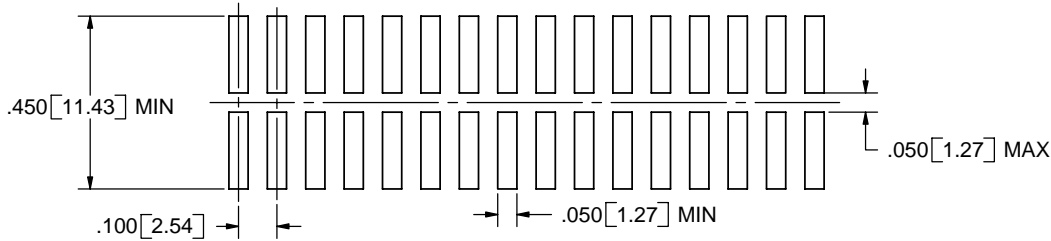

RECOMMENDED PCB LAYOUT

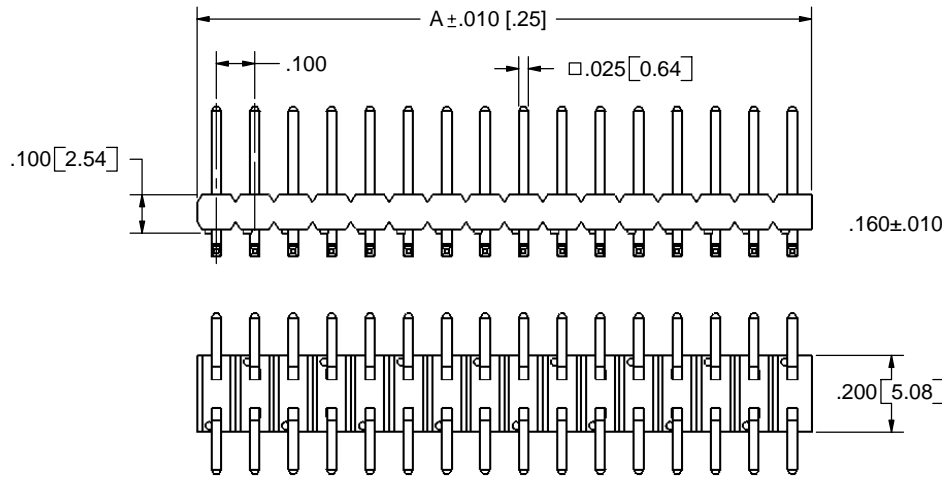

NOTES:

1. INSULATOR MATERIAL: PA9T.
2. CONTACT MATERIAL: PHOSPHOR BRONZE
3. PLATING: SEE TABLE
4. OPERATING TEMPERATURE: -65°C TO +125°C
5. PROCESSING TEMPERATURE: 260°C MAX FOR 120 SECS MAX.
6. UL FLAMMABILITY: 94V-0
7. VOLTAGE RATING: 600 VDC MINIMUM AT SEA LEVEL.
8. CURRENT RATING: 3 AMP
9. INSULATION RESISTANCE: 5000 MEGA OHMS.
10. MODIFICATION: SURFACE MOUNT.

REVISIONS

REV.	ECO. NO	DESCRIPTION	DATE	BY
A	62	INITIAL RELEASE	2/1/2005	AJT
B	83	.150" DIMENSION CHANGED TO .160"	2/1/2005	AJT
C	536	ADDED SPECS, UPDATED TO SHOW ONLY AB TERMINATION	2/1/2005	AN

PART NUMBER	A
G_C01DABN-M30	0.100 [2.54]
G_C02DABN-M30	0.200 [5.08]
G_C03DABN-M30	0.300 [7.62]
G_C04DABN-M30	0.400 [10.16]
G_C05DABN-M30	0.500 [12.70]
G_C06DABN-M30	0.600 [15.24]
G_C07DABN-M30	0.700 [17.78]
G_C08DABN-M30	0.800 [20.32]
G_C09DABN-M30	0.900 [22.86]
G_C10DABN-M30	1.000 [25.40]
G_C11DABN-M30	1.100 [27.94]
G_C12DABN-M30	1.200 [30.48]
G_C13DABN-M30	1.300 [33.02]
G_C14DABN-M30	1.400 [35.56]
G_C15DABN-M30	1.500 [38.10]
G_C16DABN-M30	1.600 [40.64]
G_C17DABN-M30	1.700 [43.18]
G_C18DABN-M30	1.800 [45.72]
G_C19DABN-M30	1.900 [48.26]
G_C20DABN-M30	2.000 [50.80]
G_C21DABN-M30	2.100 [53.34]
G_C22DABN-M30	2.200 [55.88]
G_C23DABN-M30	2.300 [58.42]
G_C24DABN-M30	2.400 [60.96]
G_C25DABN-M30	2.500 [63.50]
G_C26DABN-M30	2.600 [66.04]
G_C27DABN-M30	2.700 [68.58]
G_C28DABN-M30	2.800 [71.12]
G_C29DABN-M30	2.900 [73.66]
G_C30DABN-M30	3.000 [76.20]
G_C31DABN-M30	3.100 [78.74]
G_C32DABN-M30	3.200 [81.28]
G_C33DABN-M30	3.300 [83.82]
G_C34DABN-M30	3.400 [86.36]
G_C35DABN-M30	3.500 [88.90]
G_C36DABN-M30	3.600 [91.44]

CUSTOMER COPY



RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES[MM]		DATE		NAME	
TOLERANCES: ANGULAR: ± 1° .XX ± .02 [0.508] .XXX ± .005 [0.1270] XXXX ± .0005 [0.0127] PARENTHETICAL INFORMATION IS FOR REFERENCE ONLY		DRAWN		Aria. N	
THE INFORMATION HEREIN CONTAINS PROPRIETARY RIGHTS OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY SULLINS ELECTRONICS.		DESCRIPTION			
INTERPRET DIMENSIONS AND GEOMETRIC TOLERANCING PER: ANSI Y14.5-1984		PART NUMBER		G_C__DABN-M30	
SIZE		DWG. NO		REV	
C		C10059		C	
SCALE: 4:1				SHEET 1 OF 1	