


No. of Contacts	DIMENSIONS	
	A	B
24	10.00	12.00
28	12.00	14.00
32	14.00	16.00
36	16.00	18.00
40	18.00	20.00
44	20.00	22.00
48	22.00	24.00
52	24.00	26.00
56	26.00	28.00
60	28.00	30.00
64	30.00	32.00
68	32.00	34.00
72	34.00	36.00
76	36.00	38.00
80	38.00	40.00
84	40.00	42.00
88	42.00	44.00
92	44.00	46.00
96	46.00	48.00
100	48.00	50.00
104	50.00	52.00
108	52.00	54.00
112	54.00	56.00
116	56.00	58.00
120	58.00	60.00

SPECIFICATIONS
 Current Rating: 1 Amp
 Insulator Resistance: 5000 Mega Ohms min.
 Dielectric Withstanding: 500 VAC
 Operating Temperature: -40 Degrees C to +105 Degrees C
 Contact Material: Brass or Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 © Standard: Nylon-6T
 Contact Finish: Selective Plating, Gold/Tin

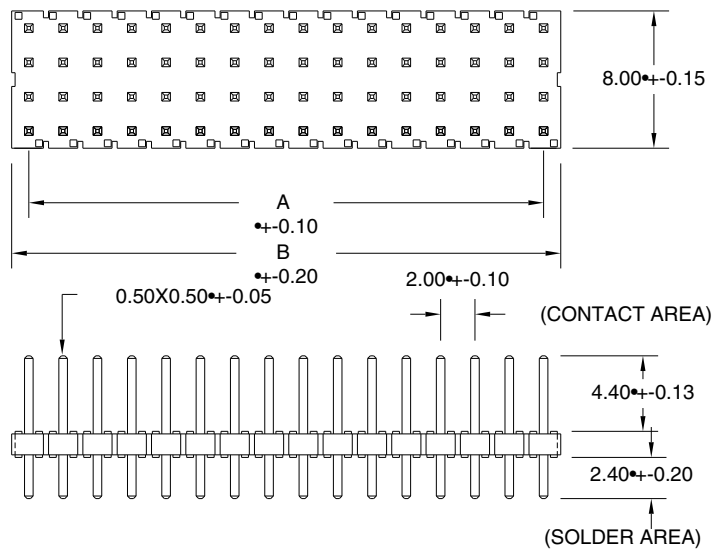

SULLINS
 801 E. MISSION RD.
 SAN MARCOS, CA 92069

GENERAL TOLERANCE		SCALE	3:1	DRAWN	DATE	DWG. NO.	T0019	TITLE	REV.
XX. \pm	XXX. \pm	UNIT	MM	CHECK	DATE	PARTS NO.	PRPNxx4RCCN		SHEET
X. \pm 0.20	.XXX \pm	SIZE	A4	APPROVE	DATE				
.X \pm 0.10									
.XX \pm 0.05									