


No. of Contacts	DIMENSIONS	
	A	B
24	10.00	12.00
28	12.00	14.00
32	14.00	16.00
36	16.00	18.00
40	18.00	20.00
44	20.00	22.00
48	22.00	24.00
52	24.00	26.00
56	26.00	28.00
60	28.00	30.00
64	30.00	32.00
68	32.00	34.00
72	34.00	36.00
76	36.00	38.00
80	38.00	40.00
84	40.00	42.00
88	42.00	44.00
92	44.00	46.00
96	46.00	48.00
100	48.00	50.00
104	50.00	52.00
108	52.00	54.00
112	54.00	56.00
116	56.00	58.00
120	58.00	60.00

SPECIFICATIONS

CURRENT RATING: 1AMP  
 INSULATOR RESISTANCE: 5000 MEGA OHM MIN  
 DIELECTRIC WITHSTANDING: 500 VAC  
 OPERATING TEMPERATURE: -40°C TO +105°C  
 CONTACT MATERIAL: GOLD FLASH OVERALL

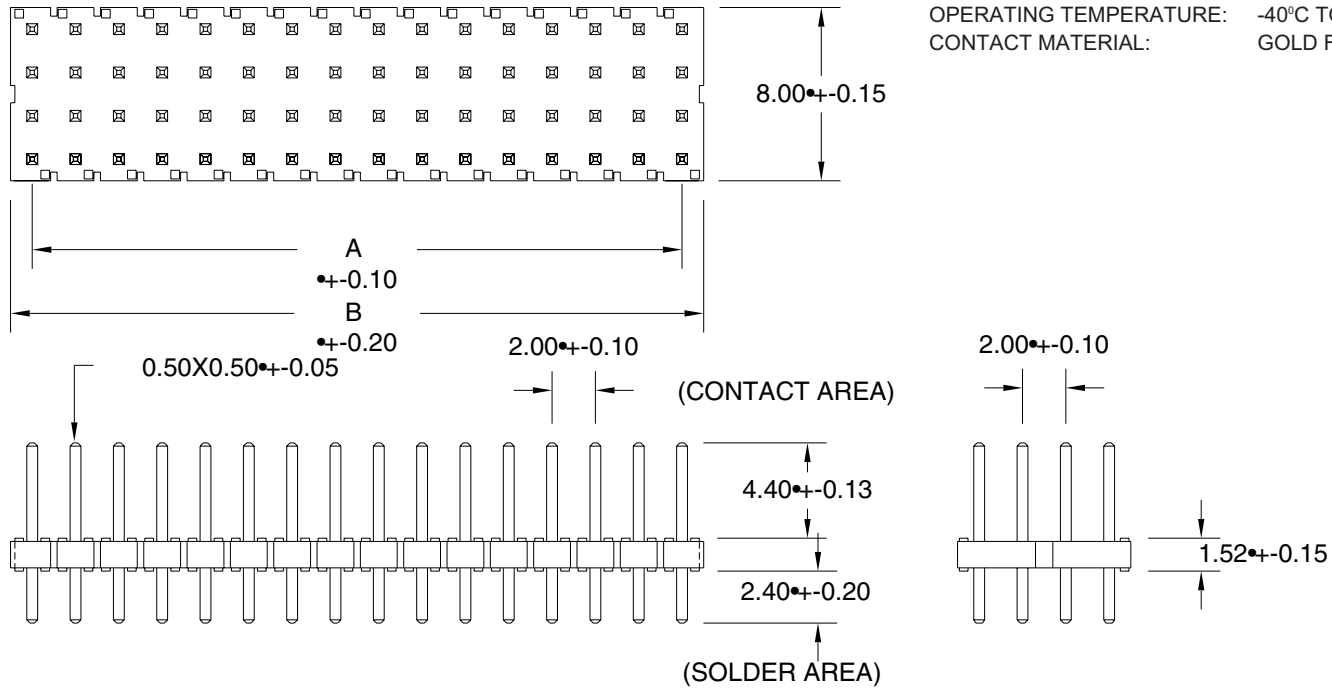

PART NUMBER CODING

x RPN xx 4RCCN-RC

NUMBER OF POSITIONS (24-120)

P = Polyester, UL 94v-0

\* Processing Temperature = 210°C for 5 seconds.

N = Nylon 6-T

Processing Temperature = 260°C for 10 seconds.

\* Indicated temperature and time is for component insulator.

Higher processing temperatures may be used, provided heat is applied from the back side of PCB, and insulator does not exceed indicated temperature and time.



RoHS Compliant

<b>SULLINS</b> 801 E. MISSION RD. SAN MARCOS, CA 92069	GENERAL TOLERANCE		SCALE	3:1	DRAWN	YCH	DATE	5-22-06	DWG. NO.	10734	TITLE	2mm Male Header	REV.	B	
	XX. +/-	.XXX +/-	UNIT	MM	CHECK		DATE		PART	xRPNxx4RCCN-RC	SHEET				
	X. +/-	.XX +/-	SIZE	A4	APPROVE		DATE								
	.X +/-	.05 +/-													