


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19 .  
 © COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

MOD	LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPROVED
30	AD	39				C	REV PER 063C-0200-04	140CT04	JR/DS

- △1 CAVITY 2 MOLDED SHUT
- △2 CAVITY 3 MOLDED SHUT

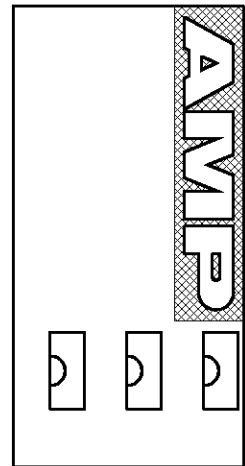

3 2 1 CAVITY NUMBER

△2	87499-6	104673-2
△1	87499-6	104673-1
EXCEPT	SAME AS PART NUMBER	PART NUMBER

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DEC ± - 3 PL DEC ± - ANGLES ± -	DR 02/09/90 KATE HELM	AMP INCORPORATED Harrisburg, Pa. 17105		
	CHK 2-15-90 S. SHUEY			
	MATERIAL: FLAME RETARDANT, GLASS FILLED NYLON, COLOR-BLACK PER ASTM D4066	APPD 2-15-90 J. GESFORD	NAME HSG, MOD IV, SGL ROW, .100 CL, 3 POSN	
	FINISH:	APPD 2-15-90 R. FELIX	SIZE <b>B</b>	FSCM NO 00779
	PRODUCT SPEC 108-25020	SCALE 4:1	SHEET 1 OF 1	
	APPLICATION SPEC 114-25003			
	WEIGHT -			