
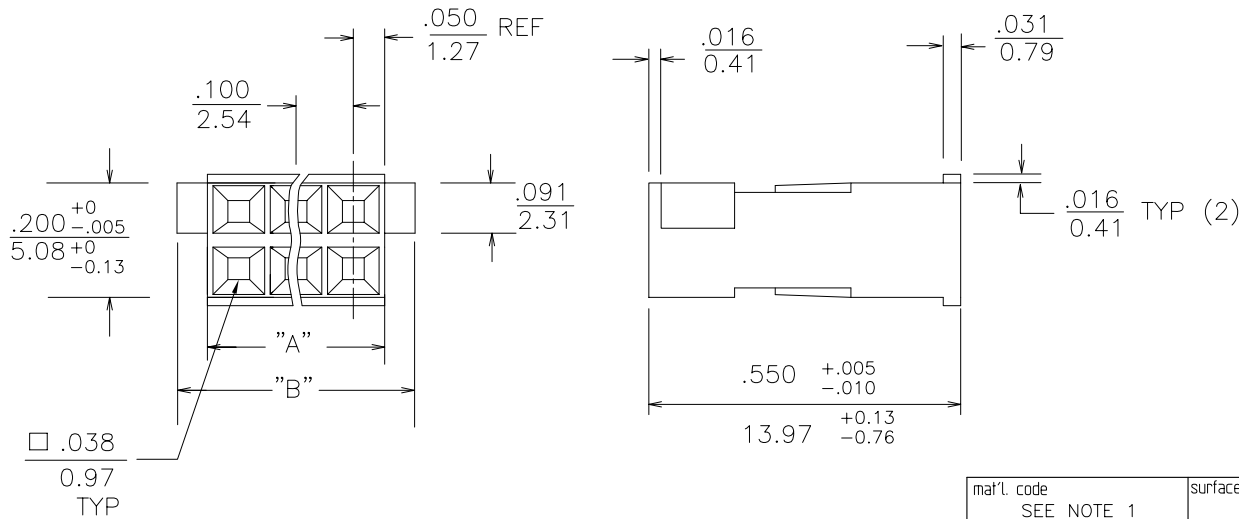



PRODUCT NUMBER	NO. OF POS.	DIM "A"	DIM "B"
68105-001	4	.194/4.93	.273/6.93
68105-001LF	4	.194/4.93	.273/6.93
68105-002	6	.294/7.47	.373/9.47
68105-002LF	6	.294/7.47	.373/9.47
68105-003	8	.394/10.01	.473/12.01
68105-003LF	8	.394/10.01	.473/12.01

OBSOLETE
OBSOLETE
OBSOLETE

NOTES

1. MATERIAL: POLYAMIDE (PA66), FLAME RETARDANT PER UL 94V-0, COLOR: BLACK
2. TERMINALS MUST BE CRIMPED PROPERLY FOR SATISFACTORY LATCHING. SEE TA-75 FOR CRIMPING INSTRUCTIONS. FOR TERMINAL APPLICATION SEE TA-531. PRODUCT SPECIFICATION: BUS-12-067.
3. THIS HOUSING IS INTENDED FOR USE WITH MINI PV™ TERMINAL WITH 22-36 GAUGE WIRE.
4. PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
5. THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO MANUFACTURING SOLDER PROCESSES.



mat'l. code SEE NOTE 1				surface ✓	tolerance tolerances unless otherwise specified	projection INCH/MM	product family PV HOUSINGS
ltr	ec'n no	dr	date	angles	linear	scale N.T.S.	title MINI LATCH HOUSING DR POLARIZED .100 [2.54] CC
D	v06-0485	HTB	2006-05-19				 sheet 1 of 1 size 68105 A3 type Product Customer Drawing
E	v06-0975	HTB	2006-09-20				
F	v07-0532	HTB	2007-08-16	0°±2°			
G	v08-0097	HTB	2008-02-25	dr	T. BREWBAKER	2006-05-19	
				engr	T. BREWBAKER	2006-05-19	
				chr	T. BREWBAKER	2006-05-19	
				appd	T. BREWBAKER	2006-05-19	
sheet index	revision sheet	G	1				



FCJconnect.com

Copyright FCJ