

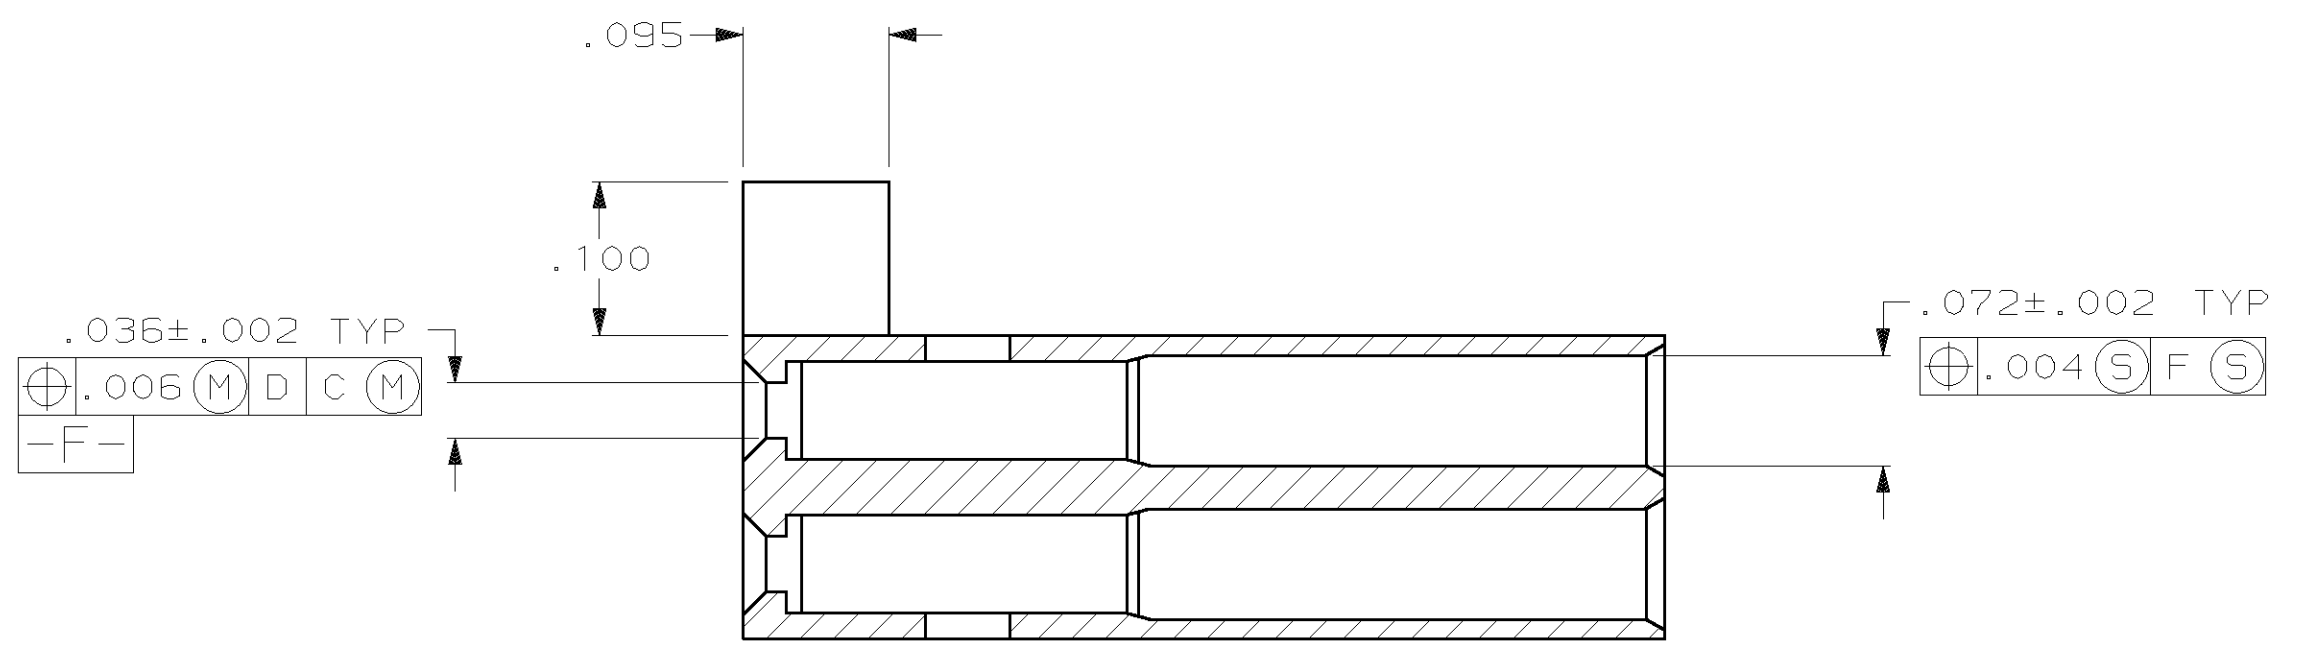
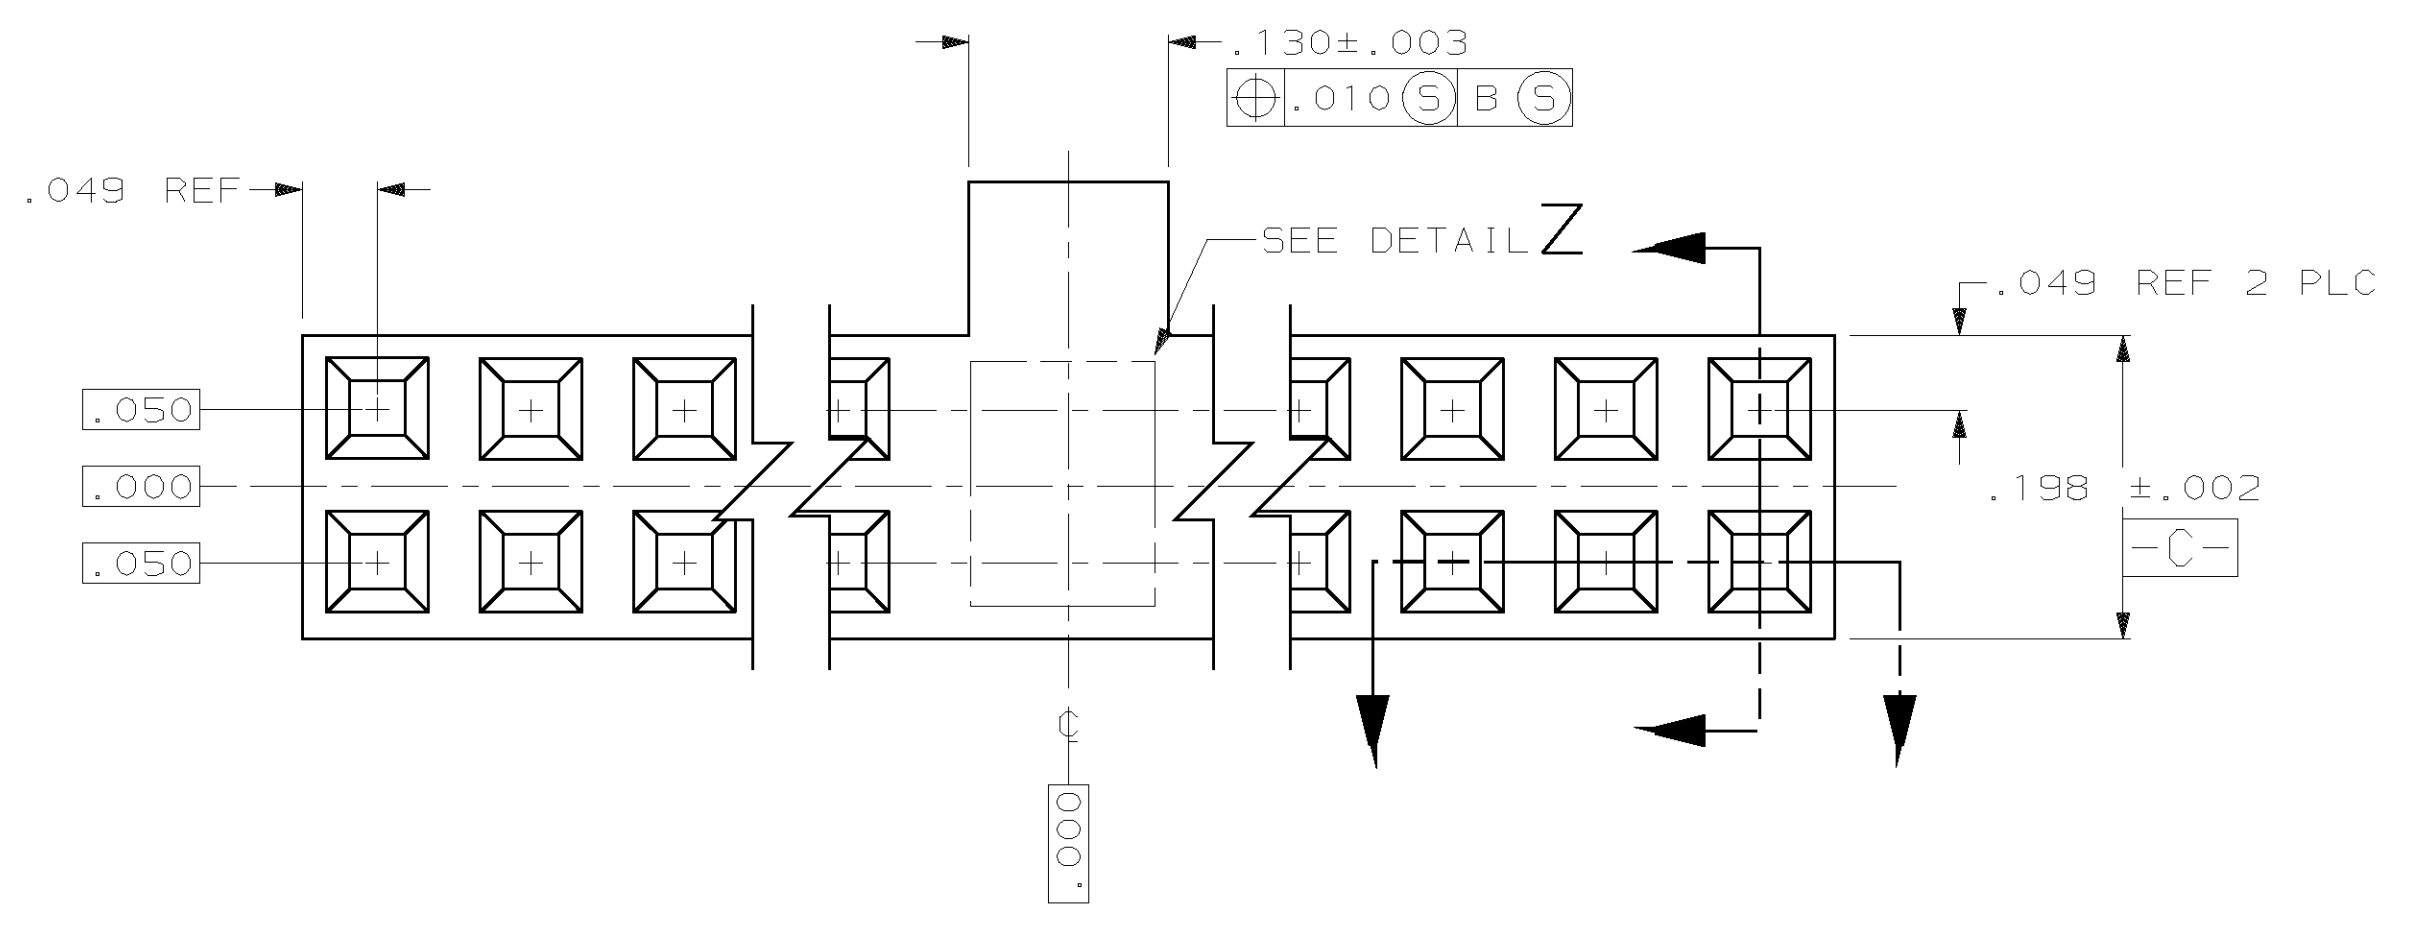
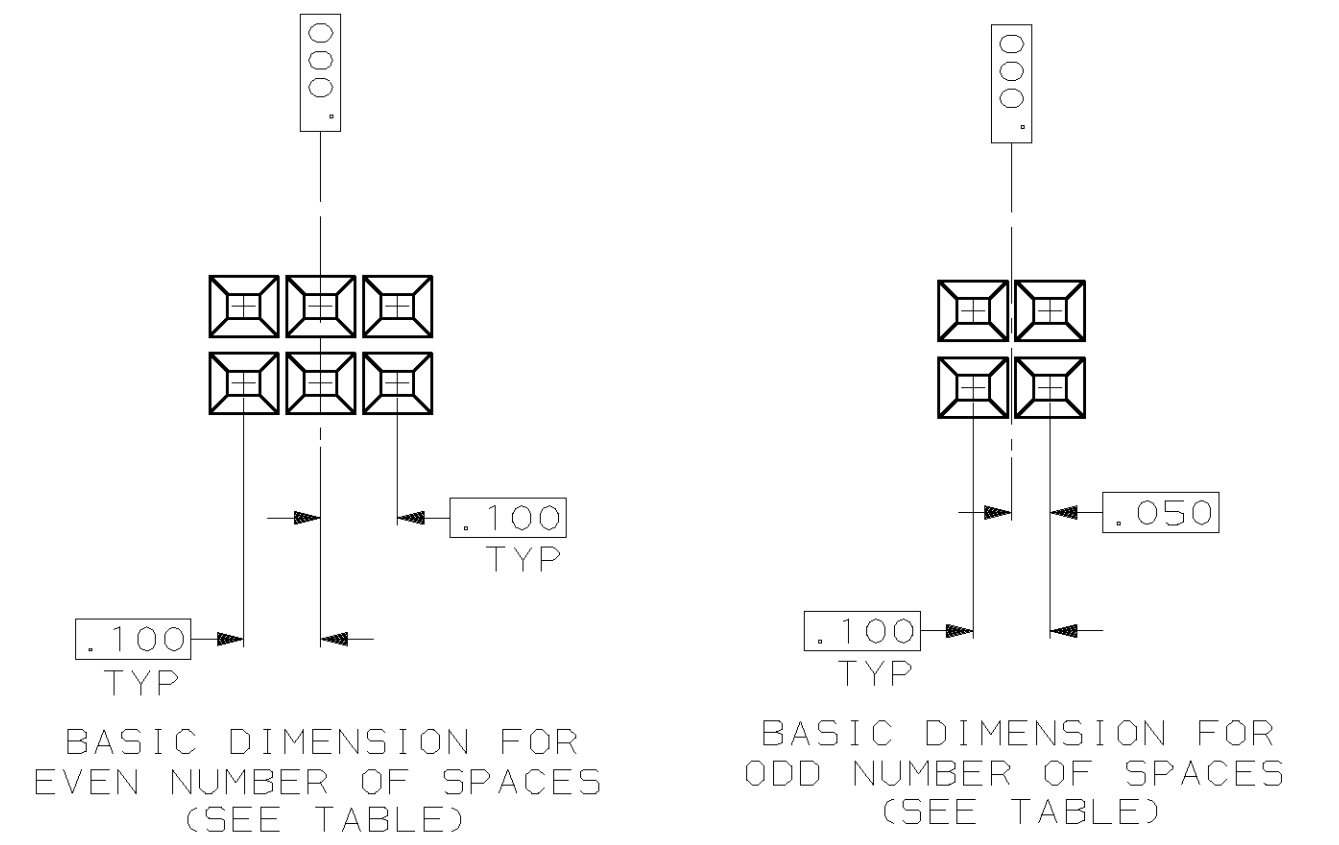


LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AD	39					REL PER PR-2670	5-17-89	SAS/
						REV LOC & DIST AD-4171	3-90	BF
						REV PER 0010-0008-96	1-11-96	PS
						REV PER 0010-0421-96	3-26-96	PS
						REV PER 0010-1483-95	3-26-96	PS
						REV PER 063C-0569-03	16MAR04	DL5

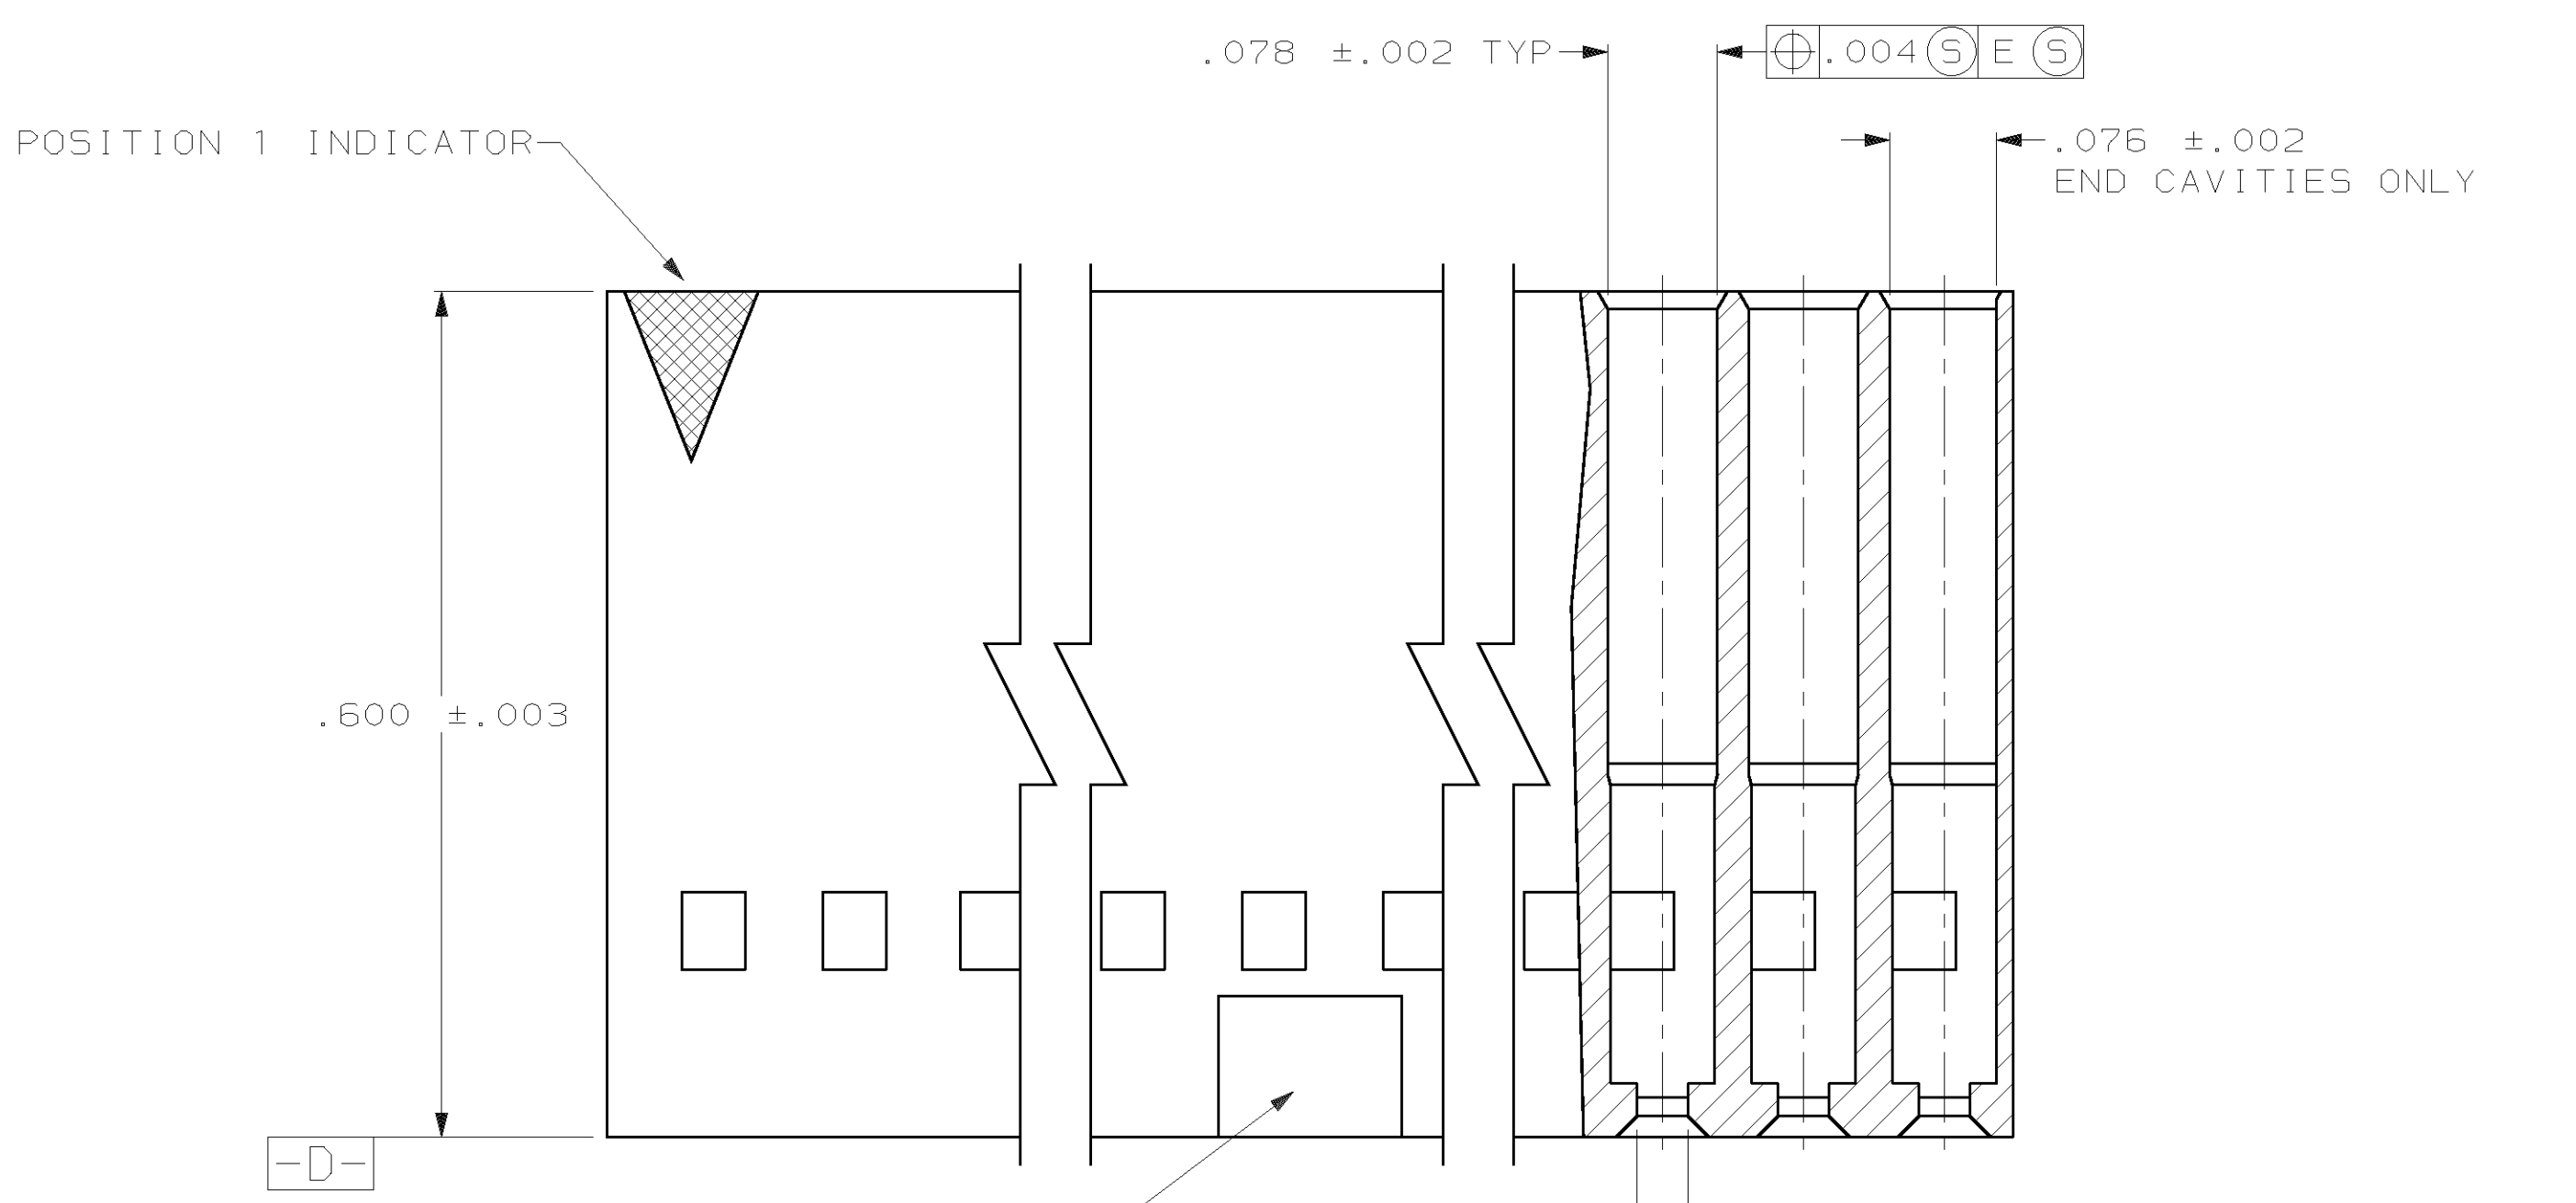

VOID CORING PERMISSIBLE IN POLARIZATION BAR.

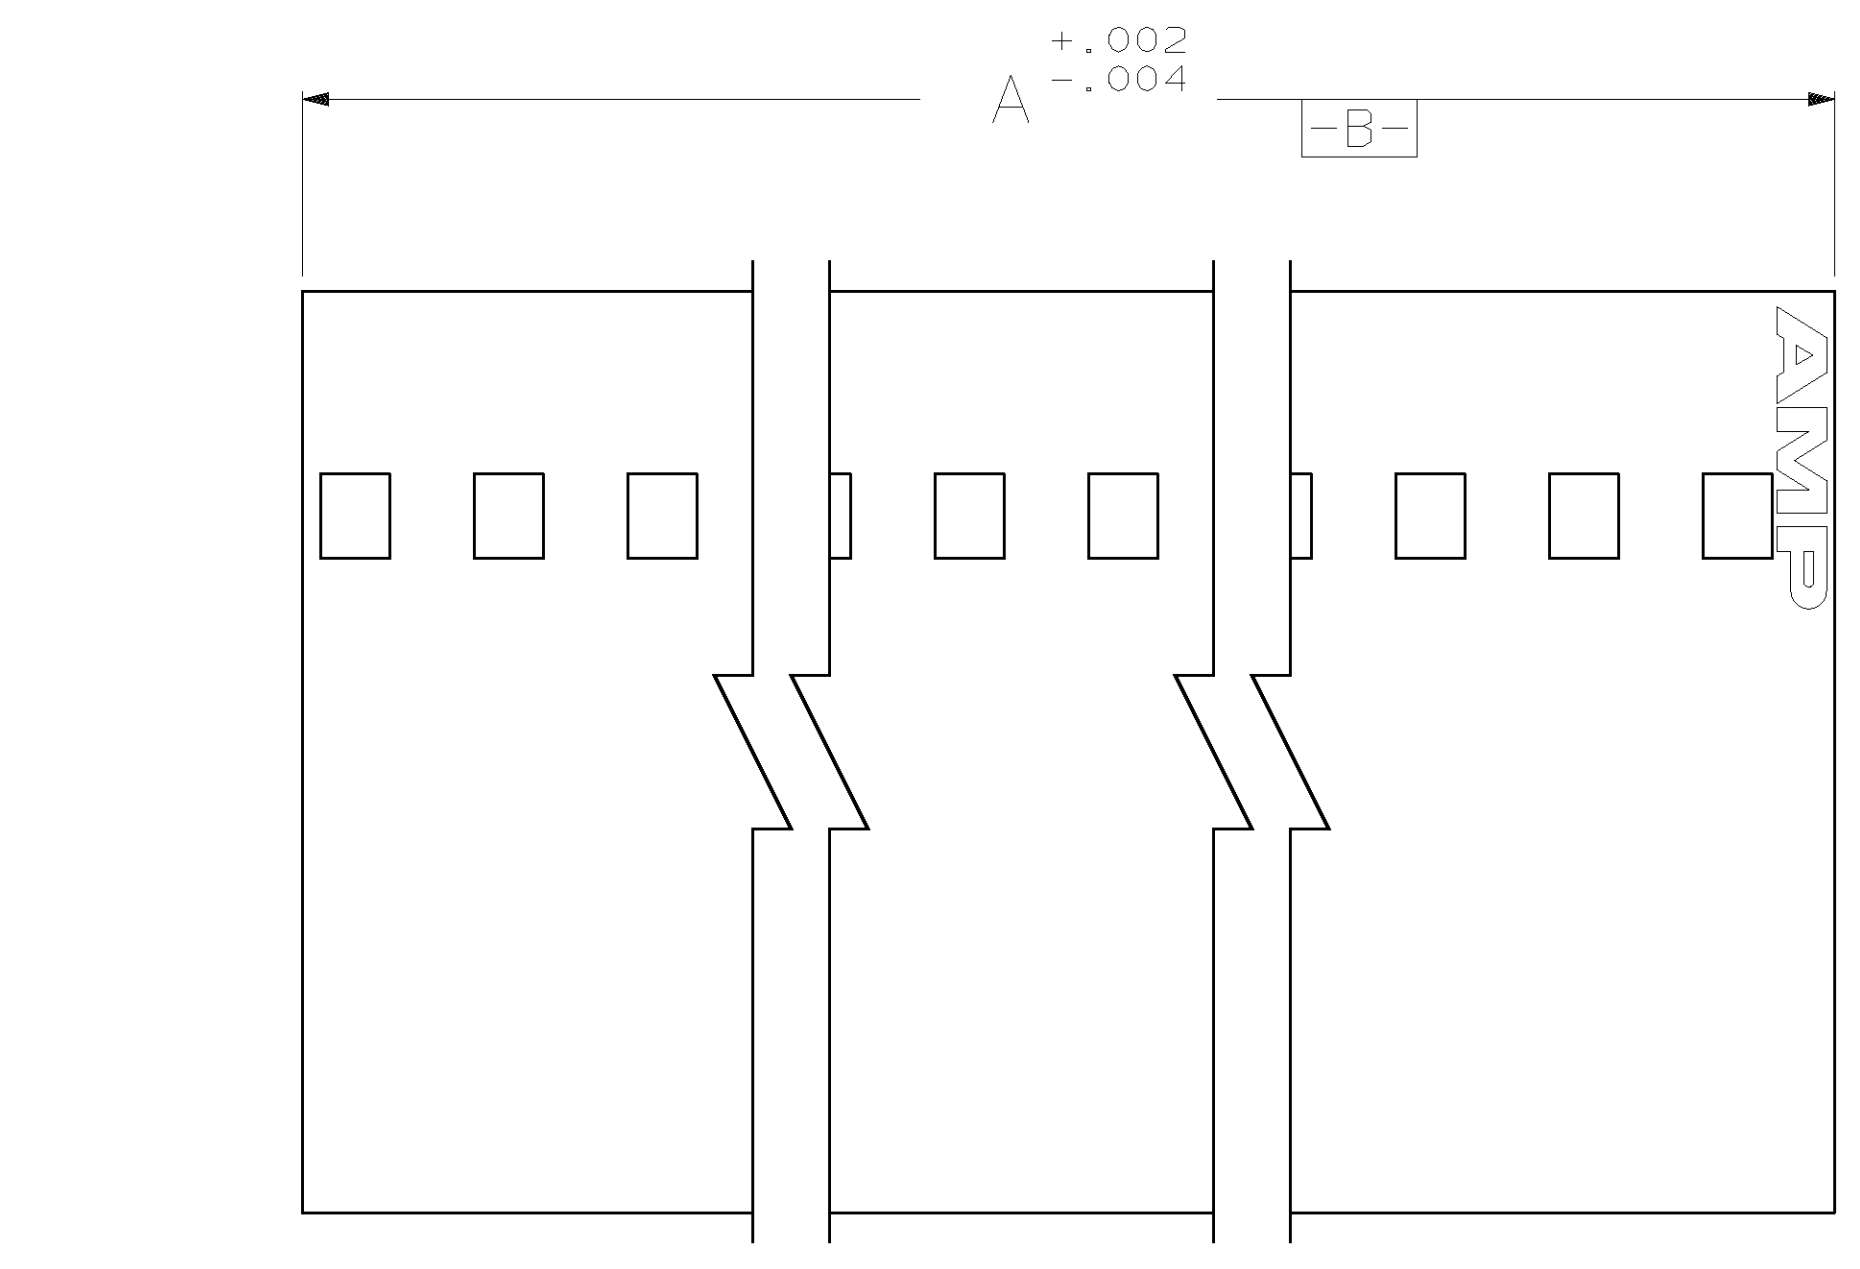

1.798	17	36	1-104483-4
2.498	24	50	1-104483-3
.598	5	12	1-104483-2
.498	4	10	1-104483-1
2.598	25	52	1-104483-0
.698	6	14	104483-9
3.198	31	64	104483-8
2.698	26	54	104483-7
1.898	18	38	104483-6
1.498	14	30	104483-5
1.298	12	26	104483-4
.998	9	20	104483-3
.898	8	18	104483-2
.398	3	8	104483-1

A	NO OF SP	NO OF POSN	PART NUMBER

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES		DR 5-17-89 SCOTT A. SHUEY		AMP INCORPORATED Harrisburg, Pa. 17105	
TOLERANCES ON:		CHK 5-18-89 H. MOLL		NAME	
2 PLC DEC ±		APPD 5-18-89 R. ELICKER		RCPT HSG, DBL ROW,	
3 PLC DEC ± .005		APPD 5-18-89 FLINCHBAUGH		PLZD, .100x.100 CL,	
ANGLES ± -		PRODUCT SPEC		SHORT PT, AMPMODU	
MATERIAL		APPLICATION SPEC		SIZE D	FSCM NO 00779
FLAME RETARDANT THERMOPLASTIC				SCALE 8:1	DRAWING NO 104483
COLOR: BLACK					SHEET 1 OF 1
FINISH -		WEIGHT -			