
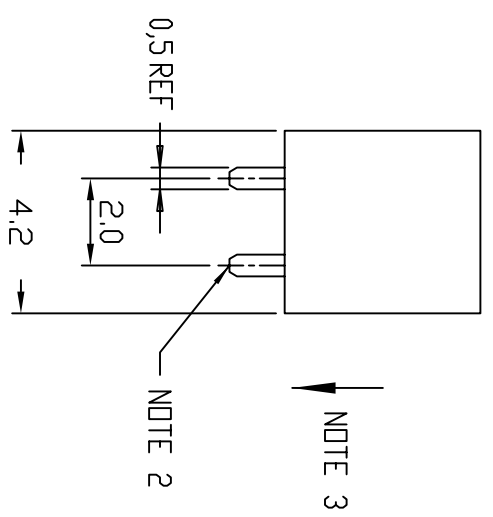


RECOMMENDED MOUNTING HOLE LAYOUT

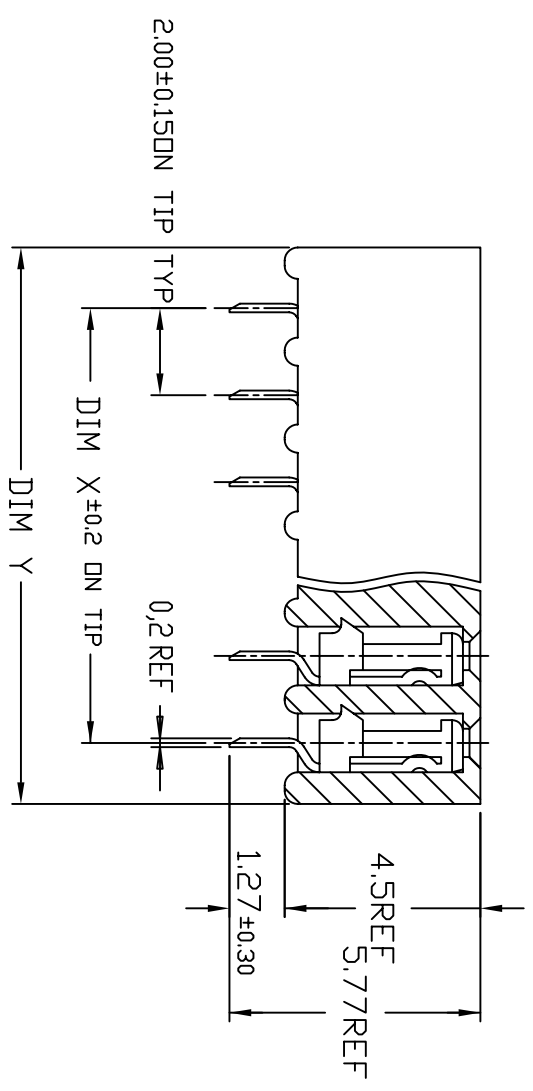

CONFIDENTIAL

mat'l. code	surface	tolerance	projection	product family
itr ecn no/dr	ISO 1302	ISO 406 ISO 1101	MM	MINITEK
date	tolerances unless otherwise specified			
7/8/05				
7/20/06				
angles	line ar	±0.25	scale 4:1	
±3°				
dr	JANET	5/30/00		
engr	JPEH	6/1/00		
chr	KH LEE	7/20/06		
chr	JOEY NG	7/20/06		
sheet	revision	F	F	
1	2			
index	sheet	1	2	

title
MINITEK II
VCC (1.27 LEG) HTP

dwg no
87175

sheet 1 of 3
size A

form: A 1 2 3 4 5 6

PRODUCT NO	POS	DIM X	DIM Y
87175-X02LF ⑤⑥⑦	2X1	- OBSOLETE	-
X04LF	2X2	2	4,8
X06LF	2X3	4	6,8
X08LF	2X4	6	8,8
X10LF	2X5	8	10,8
X12LF	2X6	10	12,8
X14LF	2X7	12	14,8
X16LF	2X8	14	16,8
X18LF	2X9	16	18,8
X20LF	2X10	18	20,8
X22LF	2X11	20	22,8
X24LF	2X12	22	24,8
X26LF	2X13	24	26,8
X28LF	2X14	26	28,8
X30LF	2X15	28	30,8
X32LF	2X16	30	32,8
X34LF	2X17	32	34,8
X36LF	2X18	34	36,8
X38LF	2X19	36	38,8
X40LF	2X20	38	40,8
X42LF	2X21	40	42,8
X44LF	2X22	42	44,8
X46LF	2X23	44	46,8
X48LF	2X24	46	48,8
X50LF ⑤⑥⑦	2X25	48	50,8

5 THE HOUSING WILL WITHSTAND EXPOSURE TO 250 °C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRARED OR VAPOR PHASE REFLOW OVEN.

6 THE HOUSING WILL WITHSTAND EXPOSURE TO 260 °C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.57MM MINIMUM THICK CIRCUIT BOARD.

⑦ THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

CONFIDENTIAL

matl. code	surface	tolerance	projection	product family
litr ecn no dr	ISO 1302	ISO 406 ISO 1101	MM	MINITEK
date	angles	linear	scale 1:1	title
	±3°	±0.25		MINITEK II
	dr	JANET	5/30/00	VCC (1.27 LEG) HTP
	enjr	JPEH	6/1/00	dwg no
	chr	KH LEE	7/20/06	87175
	apppd	JOEY NG	7/20/06	sheet 3 of 3
sheet revision				size
index sheet				A
				type
				Product Customer Drawing