



CONFIDENTIAL

lfr	ecn no	dr	date	surface	tolerance	projection	product family
				ISO 1302	ISO 408 ISO 1101	MM/INCH	LPVCC
J	SS0131	BSL	1995-06-19	tolerances unless otherwise specified	.XX±.3/XX±.01	MM/INCH	LOW PROFILE VCC SMT 2.3 BOTTOM ENTRY
K	SS0228	BSL	1995-11-17		.XX±.13/XX±.005	MM/INCH	ASSY WITH 0.30/0.012 LOCATING FEATURES
L	V94400	BSL	1999-12-01		.XXX±.05/XXX±.0020	Scale 10 : 1	
M	S04-0245	KBM	2004-11-18	dr	BS LOW		sheet 1 of 2 size
N	S05-0059	KBM	2005-04-20	engr	BS LOW		91763
P	S06-0383	KHL	2006-11-20	CHR	KH LEE		Product Customer Drawing
R	S07-0015	KHL	2007-01-09	pppd	JOEY NG		
Sheet	revision	R	R				
index	sheet	1	2				

PRODUCT NO ④	POSITIONS	DIM. A	DIM. B
91763-X04	2 X 2	2,00/.079	3,92/.154
-X06	2 X 3	4,00/.158	5,92/.233
-X08	2 X 4	6,00/.236	7,92/.312
-X10	2 X 5	8,00/.315	9,92/.391
-X12	2 X 6	10,00/.394	11,92/.469
-X14	2 X 7	12,00/.472	13,92/.548
-X16	2 X 8	14,00/.551	15,92/.627
-X18	2 X 9	16,00/.630	17,92/.706
-X20	2 X 10	18,00/.709	19,92/.784
-X22	2 X 11	20,00/.787	21,92/.863
-X24	2 X 12	22,00/.866	23,92/.942
-X26	2 X 13	24,00/.945	25,92/1,020
-X28	2 X 14	26,00/1,024	27,92/1,099
-X30	2 X 15	28,00/1,102	29,92/1,178

- NOTES:
- HOUSING MAT'L: HIGH TEMP PLASTIC
 - TERMINAL MAT'L: BeCu.
 - TERMINAL RETENTION 0.5 Kg/1.1 Lbs.
 - PRODUCT DESCRIPTION CODE:
 - XXXXX-XXXXF LEAD FREE ③
 - XXXXX-XXXXL TOTAL POSITIONS
 - XXXXX-XXXXR CONTACT AREA PLATING
 - XXXXX-XXXXB BASE NUMBER

- PACKAGING:
 - (a) XXXXX-XXX --- STD PACKAGING IN TUBE.
 - (b) XXXXX-XXXXR --- TAPE AND REEL (CONDUCTIVE) PACKAGING WITH PICK-UP CAP (SEE FIG 1).
 - (c) XXXXX-XXXXTRN --- TAPE AND REEL (CONDUCTIVE) PACKAGING WITHOUT PICK-UP CAP.
- 'V' CUT OPTIONAL - MANUFACTURING PROCESS OPTION.
- SOLDERTAIL PLATING:
 - a) SOLDERTAIL OF P/N91763-XXX IS TIN/LEAD PLATED.
 - b) SOLDERTAIL OF P/N91763-XXXXL IS 100% MATTE TIN PLATED.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 255° C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRARED OR VAPOR PHASE REFLOW OVEN.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

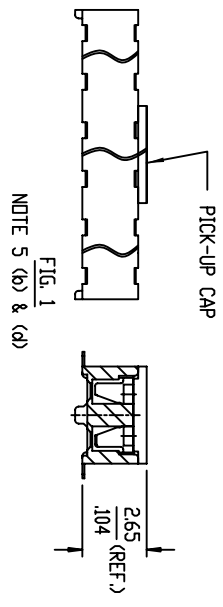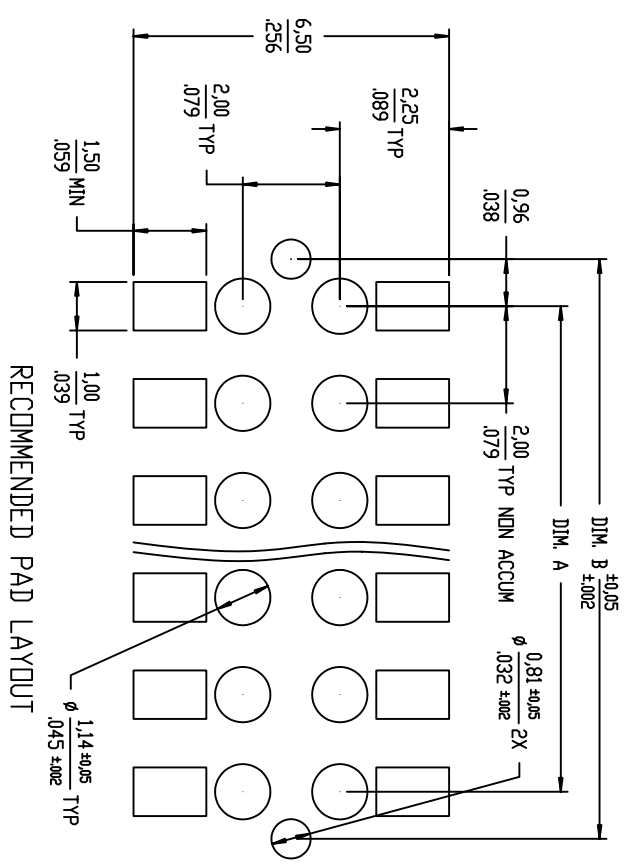

CONTACT AREA PLATING OPTIONS

0 = 0.20µm/8u" Au CONTACT AREA
1 = 0.76µm/30u" Au CONTACT AREA
3 = 0.38µm/15u" Au CONTACT AREA

CONFIDENTIAL

part. code	surface	tolerance	projection	product family	title
ISO 1302	ISO 408	ISO 1101	MM/INCH	LPVCC	LOW PROFILE VCC SMT 2.3 BOTTOM ENTRY ASSY WITH 0.30/0.012 LOCATING FEATURES
lt	ecn no	dr	date	angles	dr
R				.XXX±.13/XXX±.005	BS LOW 2000-01-08
				.XXX±.05/XXX±.0020	engr KH LOW 2007-01-08
					CHR KH LEE 2007-01-08
					pppd JOEY NG 2007-01-08
sheet	revision				
index	sheet				