


- 1 PARTS MUST COMPLY WITH AMP SOLDERABILITY SPEC 109-11-3.
- $\Delta 2$ CONTACT IS STAMPED FROM PRE-PLATED STOCK WHICH IS PLATED OVERALL WITH 0.00127 [$.000050$] NICKEL, THEN STRIPED WITH 0.00076 [$.000030$] GOLD IN CONTACT AREA INDICATED AND TIN-LEAD ON SOLDER TAIL END.
- $\Delta 3$ CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- $\Delta 4$ CONTACT IS PLATED OVERALL WITH 0.00127 [$.000050$] NICKEL, THEN 0.00076 [$.000030$] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.

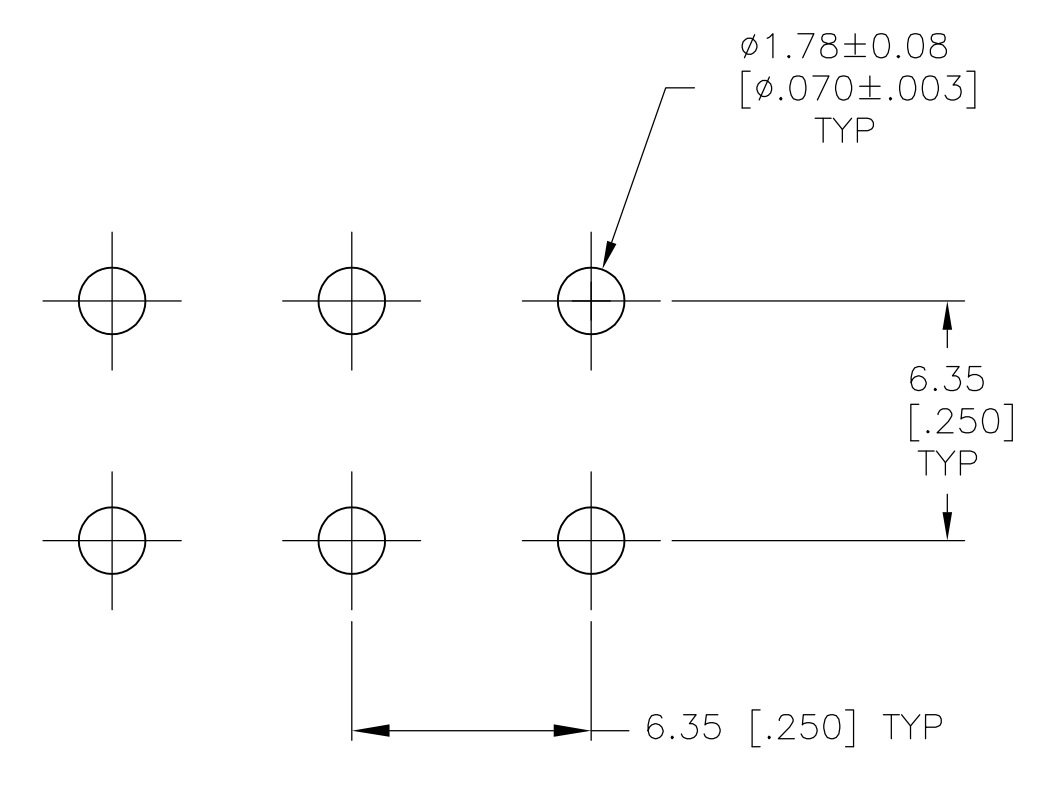

RECOMMENDED LAYOUT FOR 3.18 [$.125$] THICK PC BOARD

PH BRZ GOLD $\Delta 4$	NYLON,UL 94V-0	350834-4
PH BRZ GOLD $\Delta 2$	NYLON,UL 94V-0	350834-2
PH BRZ TIN	NYLON,UL 94V-0	350834-1
CONTACT	HOUSING	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DRN: K. WHITAKER 11OCT2005	CHK: S. RIDGILL 11OCT2005	APPRO: S. RIDGILL 11OCT2005	NAME: S. RIDGILL	PRODUCT SPEC	APPLICATION SPEC	SIZE: A1	CAGE CODE: 00779	DRAWING NO: C=350834	RESTRICTED TO:
	0 PLC ±										
	1 PLC ±										
	2 PLC ±										
	3 PLC ±										
	4 PLC ±										
	ANGLES ±										
	FINISH										
MATERIAL: SEE TABLE	FINISH: SEE TABLE	WEIGHT:	CUSTOMER DRAWING		SCALE: 5:1	SHEET: 1 OF 1	REV: K1				

