

Fig. 1

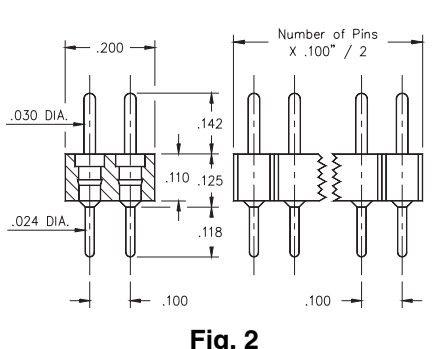


Fig. 2

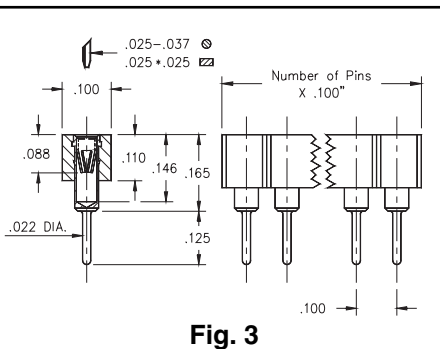


Fig. 3

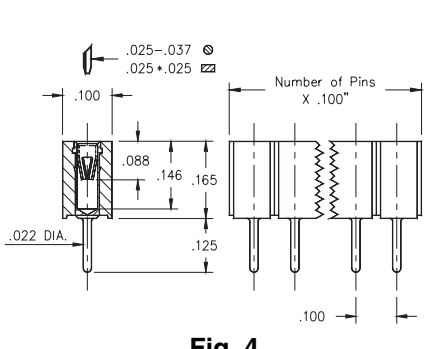


Fig. 4

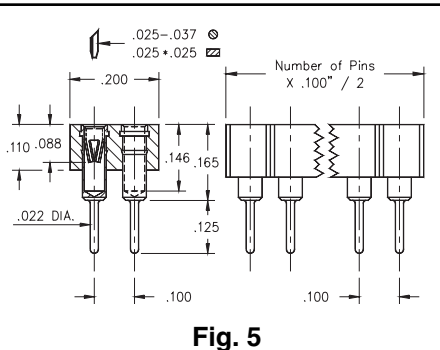


Fig. 5

- Series 800 and 802 single and double row pin headers use MM #5016 pins. See page 173 for details.
- Series 801 and 803 single and double row sockets use MM #1303 pins. See page 148 for details.
- Series 801 and 803 receptacles use Hi-Rel, 6-finger BeCu #47 contacts rated at 4.5 amps. Receptacles accept .030" diameter and .025" square pins. See page 211 for details.
- Insulators are high temp. thermoplastic.



Ordering Information

Fig. 1	Single Row	Low Profile Pin Header
	800-XX-0 __ -10-002000 Specify # of pins → 01-64	
Fig. 2	Double Row	Low Profile Pin Header
	802-XX-0 __ -10-002000 Specify # of pins → 02-64	



XX= Plating Code
See Below

For RoHS compliance select **◇** plating code.

SPECIFY PLATING CODE XX=	10◇	90	40◇	
Pin Plating	10μ" Au	200μ" Sn/Pb	200μ" Sn	

Fig. 3	Single Row	Low Profile Socket (short insulator)
	801-XX-0 __ -10-002000 Specify # of pins → 01-64	
Fig. 4	Single Row	Low Profile Socket (long insulator)
	801-XX-0 __ -10-012000 Specify # of pins → 01-36	
Fig. 5	Double Row	Low Profile Socket
	803-XX-0 __ -10-002000 Specify # of pins → 02-72	



XX= Plating Code
See Below

For RoHS compliance select **◇** plating code.

SPECIFY PLATING CODE XX=	13◇	93	99	43◇	44◇
Sleeve (Pin)	10μ" Au	200μ" Sn/Pb	200μ" Sn/Pb	200μ" Sn	200μ" Sn
Contact (Clip)	30μ" Au	30μ" Au	200μ" Sn/Pb	30μ" Au	200μ" Sn