



| No. of Contacts | DIMENSIONS | |
|-----------------|------------|-------|
| | A | B |
| 6 | 4.00 | 6.00 |
| 8 | 6.00 | 8.00 |
| 10 | 8.00 | 10.00 |
| 12 | 10.00 | 12.00 |
| 14 | 12.00 | 14.00 |
| 16 | 14.00 | 16.00 |
| 18 | 16.00 | 18.00 |
| 20 | 18.00 | 20.00 |
| 22 | 20.00 | 22.00 |
| 24 | 22.00 | 24.00 |
| 26 | 24.00 | 26.00 |
| 28 | 26.00 | 28.00 |
| 30 | 28.00 | 30.00 |
| 32 | 30.00 | 32.00 |
| 34 | 32.00 | 34.00 |
| 36 | 34.00 | 36.00 |
| 38 | 36.00 | 38.00 |
| 40 | 38.00 | 40.00 |
| 42 | 40.00 | 42.00 |
| 44 | 42.00 | 44.00 |
| 46 | 44.00 | 46.00 |
| 48 | 46.00 | 48.00 |
| 50 | 48.00 | 50.00 |
| 52 | 50.00 | 52.00 |
| 54 | 52.00 | 54.00 |
| 56 | 54.00 | 56.00 |
| 58 | 56.00 | 58.00 |
| 60 | 58.00 | 60.00 |

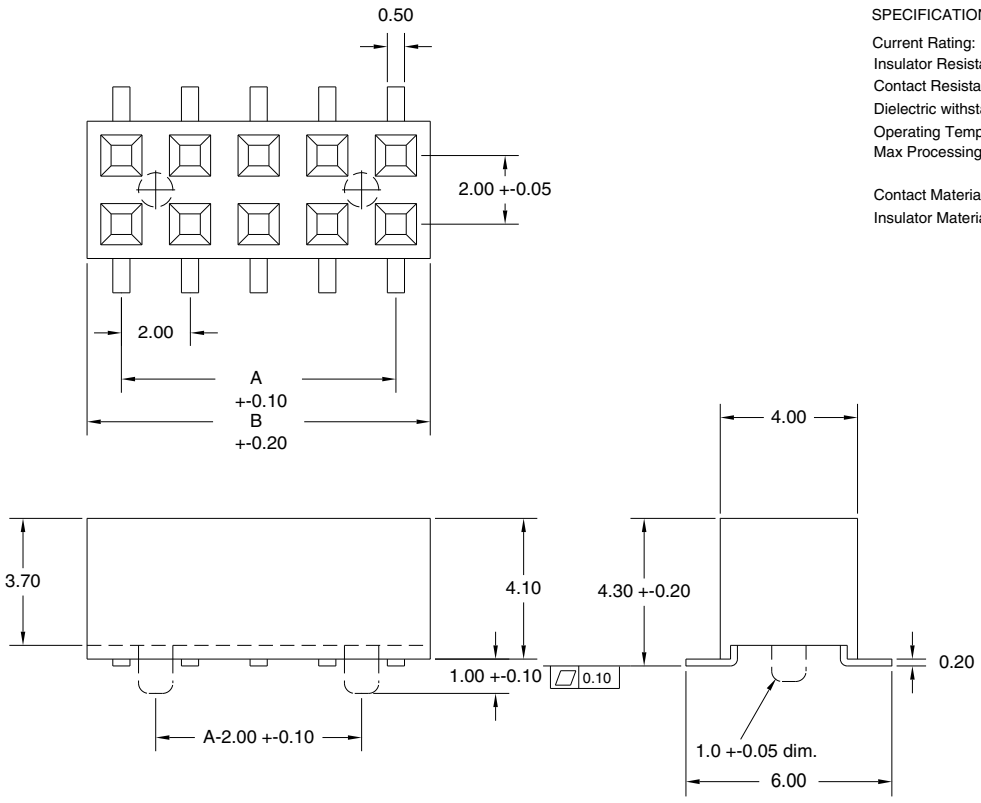

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator Resistance: 5000 Mega Ohms min.
 Contact Resistance: 20 milli Ohm Max.
 Dielectric withstanding: 500 VAC
 Operating Temperature: -40 Degrees C. to +105 Degrees C.
 Max Processing Temp: 230 Degrees C. for 30-60 seconds (260 Degrees C. for 10 seconds)

Contact Material: Phosphor Bronze.
 Insulator Material: Polyester, UL 94V-0
 ©Standard: Nylon 6T

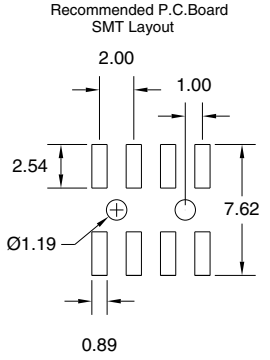

| | | | | | | | |
|--|-------------------|--------|-----------|---------|------|--|-------|
| SULLINS 801 E. Mission Rd. San Marcos, CA 92069 | GENERAL TOLERANCE | | SCALE 6:1 | DRAWN | DATE | DWG. NO. T0022 | REV. |
| | XX. + | XXX. + | UNIT MM | CHECK | DATE | PARTS NO. PPPNxx2FFKS (w/o locating peg) PPPNxx2FFKP (w locating peg) | SHEET |
| | X. + 0.20 | .XXX + | SIZE A4 | APPROVE | DATE | | |
| | .X + 0.10 | | | | | | |
| .XX + 0.05 | | | | | | | |