


| No. of Contacts | DIMENSIONS | |
|-----------------|------------|-------|
| | A | B |
| 24 | 10.00 | 12.40 |
| 28 | 12.00 | 14.40 |
| 32 | 14.00 | 16.40 |
| 36 | 16.00 | 18.40 |
| 40 | 18.00 | 20.40 |
| 44 | 20.00 | 22.40 |
| 48 | 22.00 | 24.40 |
| 52 | 24.00 | 26.40 |
| 56 | 26.00 | 28.40 |
| 60 | 28.00 | 30.40 |
| 64 | 30.00 | 32.40 |
| 68 | 32.00 | 34.40 |
| 72 | 34.00 | 36.40 |
| 76 | 36.00 | 38.40 |
| 80 | 38.00 | 40.40 |
| 84 | 40.00 | 42.40 |
| 88 | 42.00 | 44.40 |
| 92 | 44.00 | 46.40 |
| 96 | 46.00 | 48.40 |
| 100 | 48.00 | 50.40 |
| 104 | 50.00 | 52.40 |
| 108 | 52.00 | 54.40 |
| 112 | 54.00 | 56.40 |
| 116 | 56.00 | 58.40 |
| 120 | 58.00 | 60.40 |

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator Resistance: 5000 Mega Ohms min.
 Contact Resistance: 20 milli Ohm Max.
 Dielectric Withstanding: 500 VAC
 Operating Temperature: -40 Degrees C. to +105 Degrees C.
 Max. Processing Temp: 230 Degrees C. for 30-60 seconds
 (260 Degree C. for 10 seconds)

Contact Material: Phosphor Bronze.
 Insulator Material: Polyester, UL 94V-0
 © Standard: Nylon-6T

Contact Finish: Selective Plating, Gold/Tin

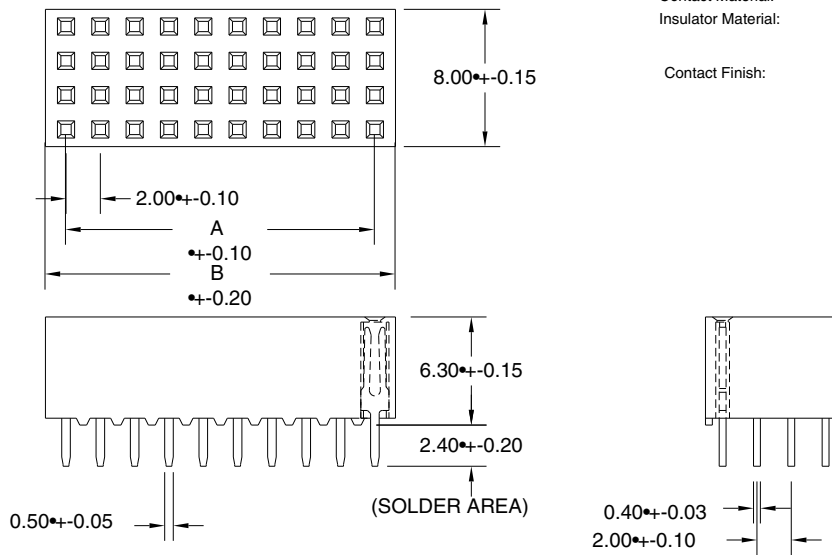

SULLINS

801 E. MISSION RD.
 SAN MARCOS, CA 92069

| GENERAL TOLERANCE | |
|-------------------|----------|
| XX. +/- | XXX. +/- |
| X. +/- 0.20 | .XXX +/- |
| .X +/- 0.10 | X.B +/- |
| .XX +/- 0.05 | .X.B +/- |

SCALE **3:1**
 UNIT mm
 SIZE A4

DRAWN
 CHECK
 APPROVE

DATE
 DATE
 DATE

DWG. NO. T0025
 PARTS NO. PPRNXX4EFCN

TITLE

REV.

SHEET