
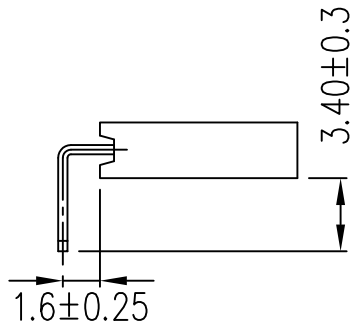
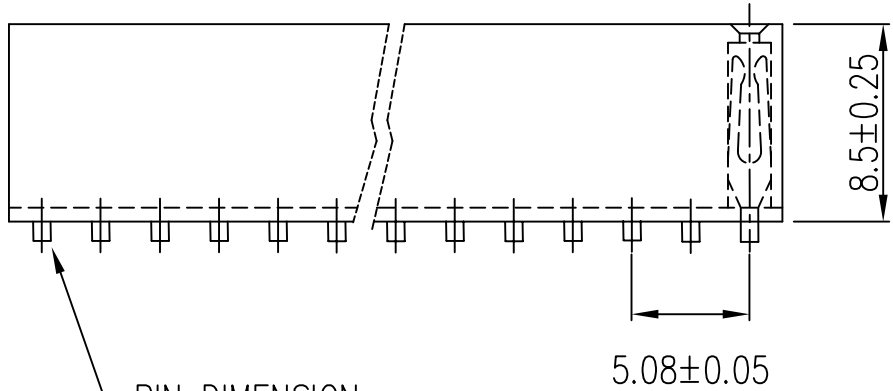
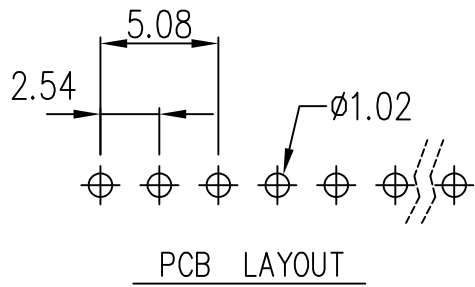


REV.	ECN NO.	DATE
A	RELEASED	09/02/03
B	UPDATE TOL	12/15/04

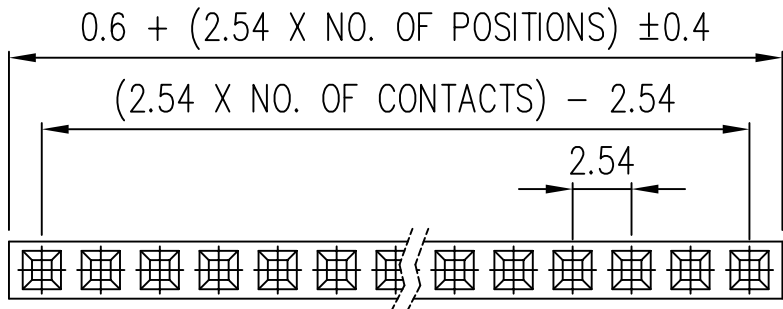

PIN DIMENSION:  
0.76(W) X 0.4(t)

SPECIFICATIONS

- CURRENT RATING : 3 AMPS
- INSULATOR RESISTANCE : 5000 MEGOHMS MIN.
- CONTACT RESISTANCE : 20 MILLIOHMS MAX.
- DIELECTRIC WITHSTANDING : AC 500V
- OPERATING TEMPERATURE : -40°C - +125°C
- CONTACT MATERIAL : PHOSPHOR BRONZE
- INSULATOR MATERIAL : POLYESTER PBT, UL 94V-0
- \*CONTACT PLATING: P= OVERALL GOLD FLASH, T=OVERALL TIN

ORDERING INFORMATION:

- Replace "\*" with plating code
- Replace "xx" with number of contacts

SCALE	NTS	DRAW	BC	Sullins Electronics	
UNIT	MM	CHECK		San Marcos, CA Tel: 760 744-0125 www.SullinsElectronics.com	
TOLERANCE		AP"E		NAME: FEMALE HEADER, 2.54MM SPACING, 8.5mm PROFILE, RIGHT ANGLE	
.0=±0.35 .00=±0.2 ANG=±5°		PROJECTION		PART NO	PP*Cxx1LGBN
				DRAW NO	7009