

E/AL-NS 32

Order No.: 1201659

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1201659>

End bracket, for end support of UKH 50 - UKH 240, is pushed onto
DIN rail NS 32 and fixed with 2 screws, width: 10 mm, color: Aluminum

Commercial data

EAN	4017918017422
Pack	10 Pcs.
Customs tariff	85369010
Weight/Piece	0.03163 KG
Catalog page information	Page 30 (CL-2007)

Product notes

WEEE/RoHS-compliant since:
11/26/2005



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data**General data**

Length	21.2 mm
Width	10 mm
Material	Aluminum
Color	silver

Accessories

Item	Designation	Description
------	-------------	-------------

Assembly


1201028	NS 32 AL UNPERF 2000MM	G rail 32 mm (NS 32)
1201280	NS 32 CU/120QMM UNPERF 2000MM	G-profile DIN rail, deep-drawn, material: Copper, unperforated, height 15 mm, width 32 mm, length 2 m
1201358	NS 32 CU/35QMM UNPERF 2000MM	G-profile DIN rail, material: Copper, unperforated, height 15 mm, width 32 mm, length 2 m
1201002	NS 32 PERF 2000MM	G-profile DIN rail, material: Steel, perforated, height 15 mm, width 32 mm, length 2 m
1201015	NS 32 UNPERF 2000MM	G-profile DIN rail, material: Steel, unperforated, height 15 mm, width 32 mm, length 2 m

Marking

1007248	SBS10:UNBEDRUCKT	Marker cards, unprinted, for individual labeling with the M-PEN, 250-section, perforated, white plastic
1050525	ZB10:SO/CMS	Zack strip, 10-section, divisible, special printing, marking according to customer requirements

Drawings

Dimensioned drawing

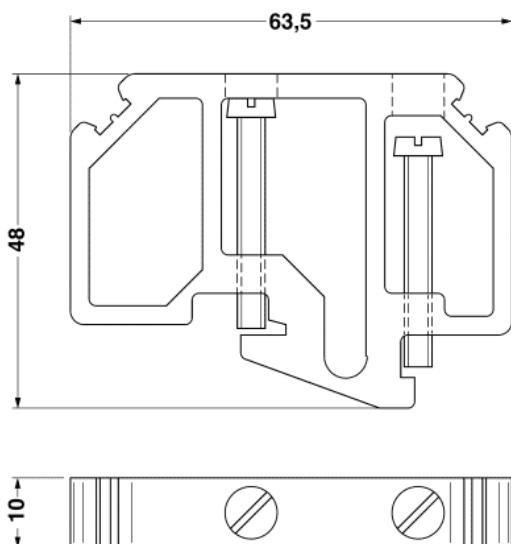

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2008 Phoenix Contact
Technical modifications reserved;