

SKBI 32/D

Order No.: 2261054

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2261054>

Plug-in card block, for indirect connection in accordance with IEC 603-1/DIN 41612, complete with guide rails, engagement catches without ejector, with standardized marking on both connection sides, as well as fixing screws M4

Commercial data	
EAN	4017918053826
Pack	1 Pcs.
Customs tariff	85369010
Weight/Piece	0.186 KG
Catalog page information	Page 485 (CC-2007)

Product notes

WEEE/RoHS-compliant since:
06/08/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
Dimensions / positions	
Length	43 mm
Height	138 mm
Width	112 mm

Pitch	5.08 mm
Number of positions	32
Hole diameter	4.2 mm
Screw thread	M 3
Tightening torque, min	0.5 Nm

Technical data

Connection in acc. with standard	EN-VDE
Nominal current I_N	4 A
Nominal voltage U_N	250 V
Stripping length	8 mm

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

Certificates / Approvals

Approval logo

**requested approbations**


Certification	GOST
---------------	------

Accessories


Item	Designation	Description
Assembly		
2261009	SF-SKBI 31/32	Snap foot, for horizontal or vertical mounting of the SKBI plug-in card blocks, on the NS 35/7.5 mounting rail

Drawings

Dimensioned drawing

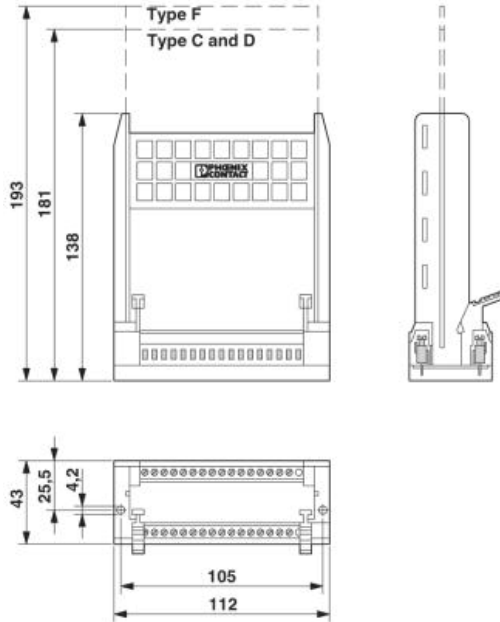

Schematic diagram

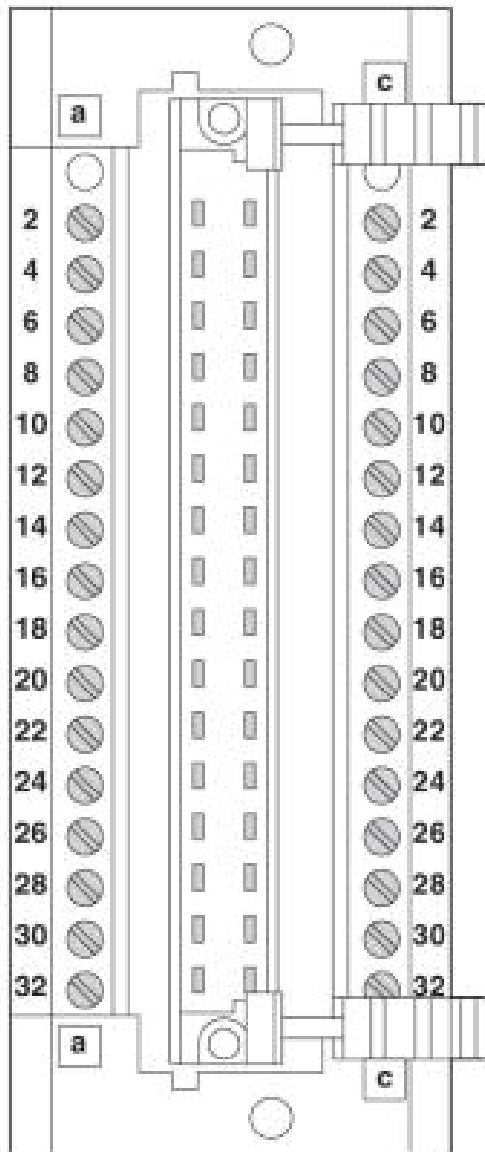

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2008 Phoenix Contact
Technical modifications reserved;