

**FLKM 50-PA-SLC500/OUT/2A**

Order No.: 2293446

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2293446>VARIOFACE front adapter, 1 x 16 channels can be connected for  
Allen-Bradley SLC 500 1746 OA16 and OW16**Commercial data**

EAN	4017918108847
Pack	1 Pcs.
Customs tariff	85369010
Weight/Piece	0.0586 KG
Catalog page information	Page 164 (IF-2007)

**Product notes**WEEE/RoHS-compliant since:  
06/04/2007

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****General**

Nominal voltage $U_N$	120 V AC/DC
Number of plug connectors	1
No. of positions, plug connector	50
Number of positions	50

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Max. permissible current	Per path 2 A
Max. permissible total current	Per byte 7 A (during supply via a connector)
Pollution degree	1
Surge voltage category	II

**Certificates / Approvals**

Approval logo




**requested approbations**

Certification	CUL, GOST, UL
---------------	---------------

**Drawings**

Circuit diagram

Connection scheme FLKM 50-PA-SLC500/OUT/2A

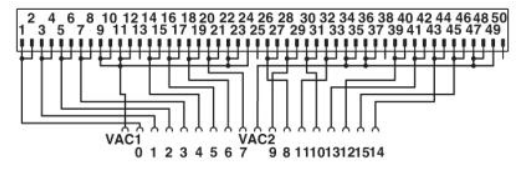

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2008 Phoenix Contact  
Technical modifications reserved;