

# FLKM 14-PA-SLC500/OUT

Order No.: 2293459



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2293459>

VARIOFACE front adapter, 2 x 8 channels can be connected, for Allen-Bradley SLC 500, 1746 OB16, OV16, OG16 and IG16

| Commercial data          |                    |
|--------------------------|--------------------|
| EAN                      | 4017918108854      |
| Pack                     | 1 Pcs.             |
| Customs tariff           | 85369010           |
| Weight/Piece             | 0.0602 KG          |
| Catalog page information | Page 164 (IF-2007) |

#### Product notes

WEEE/RoHS-compliant since:  
06/04/2007



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

| General                          |  |
|----------------------------------|--|
| Nominal voltage $U_N$            | 120 V AC/DC  |
| Connection type, plug connector  | Flat-ribbon cable plug connector in acc. with IEC 60603-13 |
| Number of plug connectors        | 2  |
| No. of positions, plug connector | 14   |

|   |  |
|---|--|
| Number of positions                     | 14   |
| Ambient temperature (operation)         | -20 °C ... 50 °C                             |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C                             |
| Mounting position                       | Any  |
| Standards/regulations                   | IEC 60664                                    |
|   | DIN EN 50178                                 |
|   | IEC 62103                                    |
| Max. permissible current                | Per path 1 A                                 |
| Max. permissible total current          | Per byte 2 A (during supply via a connector) |
| Pollution degree                        | 1  |
| Surge voltage category                  | II   |

**Certificates / Approvals**

Approval logo




**requested approbations**

|               |               |
|---------------|---------------|
| Certification | CUL, GOST, UL |
|---------------|---------------|

**Drawings**

Circuit diagram

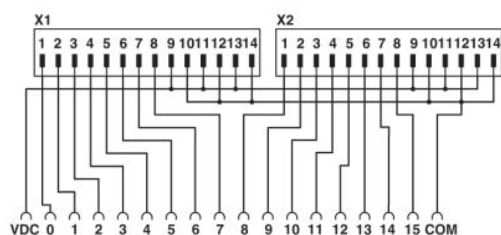

Connection scheme FLKM 14-PA-SLC500/OUT

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2008 Phoenix Contact  
Technical modifications reserved;