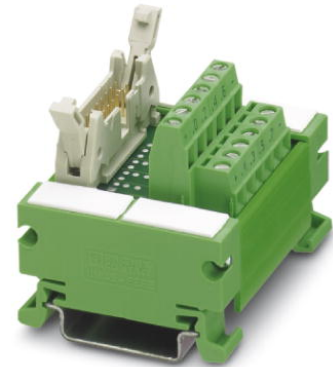


UM 45-FLK14/PLC

Order No.: 2962476

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2962476>VARIOFACE COMPACT LINE, interface module for 8 channels, for
assembly on mounting rail NS 35/7.5, screw connection

Commercial data

EAN	4017918087173
Pack	1 Pcs.
Customs tariff	85369010
Weight/Piece	0.079 KG
Catalog page information	Page 199 (IF-2007)

Product notes

WEEE/RoHS-compliant since:
08/03/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Nominal voltage U_N	25 V AC (50 V DC)
Max. current carrying capacity per branch	1 A
Max. total current of voltage supply	3 A
Number of positions	14

Length	45 mm
Width	59 mm
Height	50 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Test voltage	500 V (50 Hz, 1 min)
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
Pollution degree	2
Surge voltage category	II

Connection data

Connection 1	Field level
Type of connection	Screw connection
Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	1.5 mm ²
Conductor cross section stranded min.	0.14 mm ²
Conductor cross section stranded max.	1.5 mm ²
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	14
Stripping length	6 mm
Screw thread	M 3
Connection 2	Control system level
Number of connections	1
Type of connection	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of positions	14

Certificates / Approvals

Approval logo




requested approbations

Certification	CUL, GOST, UL
---------------	---------------

Drawings

Circuit diagram

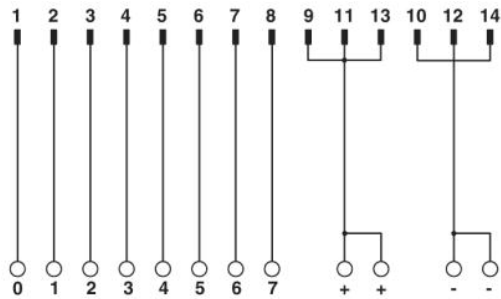

UM 45-FLK14/PLC connection scheme

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2008 Phoenix Contact
Technical modifications reserved;