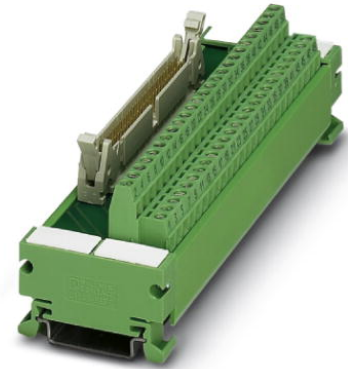


## UM 45-FLK14

Order No.: 2962557

The illustration shows a 34-pos. version

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2962557>VARIOFACE module, with screw connection and flat-ribbon cable  
connector, for assembly on NS 35/7.5, 14 positions

### Commercial data

EAN	4017918087227
Pack	1 Pcs.
Customs tariff	85369010
Weight/Piece	0.083 KG
Catalog page information	Page 279 (IF-2007)

### Product notes

WEEE/RoHS-compliant since:  
01/19/2007

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

Nominal voltage $U_N$	60 V DC
	25 V AC
Max. current carrying capacity per branch	1 A
Number of positions	14
Length	45 mm

Width	59 mm
Height	50 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Test voltage input/output	500 V AC
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	DIN VDE 110
Pollution degree	2
Surge voltage category	II

**Connection data**

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Conductor cross section solid min.	0.14 mm <sup>2</sup>
Conductor cross section solid max.	1.5 mm <sup>2</sup>
Conductor cross section stranded min.	0.14 mm <sup>2</sup>
Conductor cross section stranded max.	1.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	16
Stripping length	6 mm
Screw thread	M 3
Connection 2	Flat-ribbon cable connection
Type of connection	Pluggable

**Certificates / Approvals****CUL**

Nominal voltage $U_N$	125 V
Nominal current $I_N$	1 A

**UL**

Nominal voltage $U_N$	125 V
Nominal current $I_N$	1 A
Certification	CUL, GOST, UL


**Accessories**

Item	Designation	Description
<b>Cable/conductor</b>		
2295729	FLK 14/EZ-DR/ 30/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 0.3 m
2288901	FLK 14/EZ-DR/ 50/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 0.5 m
2296977	FLK 14/EZ-DR/ 50/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 0.5 m
2288914	FLK 14/EZ-DR/ 100/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 1 m
2296980	FLK 14/EZ-DR/ 100/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 1 m
2288927	FLK 14/EZ-DR/ 150/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 1.5 m
2296993	FLK 14/EZ-DR/ 150/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 1.5 m
2288930	FLK 14/EZ-DR/ 200/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 2 m
2297002	FLK 14/EZ-DR/ 200/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 2 m
2288943	FLK 14/EZ-DR/ 250/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 2.5 m
2288956	FLK 14/EZ-DR/ 300/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 3 m
2299013	FLK 14/EZ-DR/ 300/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 3 m
2288969	FLK 14/EZ-DR/ 350/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 3.5 m
2288972	FLK 14/EZ-DR/ 400/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 4 m

2299026	FLK 14/EZ-DR/ 400/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 4 m
2290847	FLK 14/EZ-DR/ 450/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 4,5 m
2290834	FLK 14/EZ-DR/ 500/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 5 m
2290850	FLK 14/EZ-DR/ 550/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 5,5 m
2290863	FLK 14/EZ-DR/ 600/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 6 m
2299039	FLK 14/EZ-DR/ 600/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 6 m
2299563	FLK 14/EZ-DR/ 800/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 8 m
2299042	FLK 14/EZ-DR/ 800/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 8 m
2299576	FLK 14/EZ-DR/1000/KONFEK	Round cable set, with two 14-pos. socket strips (1:1 connection), for connecting 8 channels, cable length: 10 m
2299055	FLK 14/EZ-DR/1000/KONFEK/S	Assembled shielded round cable, with two 14-pos. female connectors (1:1 connection), for connecting 8 channels, length: 10 m
2295046	FLK EZ-DR-S.../.../...	Round cable, with preassembly, shielded, variable cable length
2295059	FLK EZ-DR.../.../...	Round cable, with preassembly, not shielded, variable cable length

**Drawings**

Circuit diagram

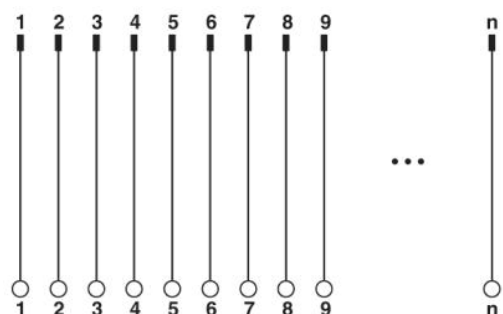

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2008 Phoenix Contact  
Technical modifications reserved;