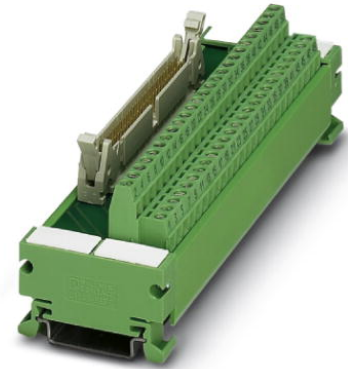


UM 45-FLK60

Order No.: 2962625

The illustration shows a 34-pos. version

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2962625>VARIOFACE module, with screw connection and flat-ribbon cable
connector, for assembly on NS 35/7.5, 60 positions

Commercial data

EAN	4017918087296
Pack	1 Pcs.
Customs tariff	85369010
Weight/Piece	0.1893 KG
Catalog page information	Page 244 (IF-2007)

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Nominal voltage U_N	60 V DC
	25 V AC
Max. current carrying capacity per branch	1 A
Number of positions	60
Length	45 mm
Width	176 mm
Height	50 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Test voltage input/output	500 V AC

Mounting position	Any
Standards/regulations	IEC 60664
	DIN VDE 0110
Pollution degree	2
Surge voltage category	II

Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	1.5 mm ²
Conductor cross section stranded min.	0.14 mm ²
Conductor cross section stranded max.	1.5 mm ²
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	16
Stripping length	6 mm
Screw thread	M 3
Connection 2	Flat-ribbon cable connection
Type of connection	Pluggable

Certificates / Approvals

Approval logo

**CUL**


Nominal voltage U _N	125 V
Nominal current I _N	1 A

UL

Nominal voltage U _N	125 V
Nominal current I _N	1 A
Certification	CUL, GOST, UL

Drawings

Circuit diagram

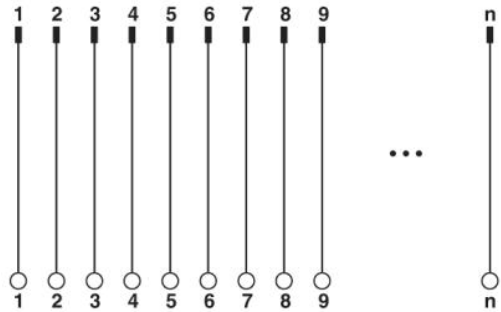

Address

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2008 Phoenix Contact
Technical modifications reserved;