


# UMK- C64M-VS

Order No.: 2970057

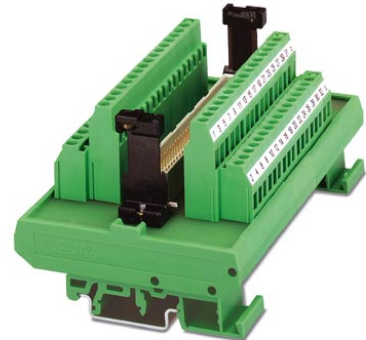

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2970057>

VARIOFACE module, for IEC 603/DIN 41612 plug connector, type C, 64-pos., a, c components mounted, with male connector, cable housing with screw interlock

Commercial data	
EAN	4017918087579
Pack	1 Pcs.
Customs tariff	85369010
Weight/Piece	0.3118 KG
Catalog page information	Page 230 (IF-2002)

#### Product notes

WEEE/RoHS-compliant since:  
09/29/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

General data	
Nominal voltage $U_N$	125 V
Max. current carrying capacity per branch	1 A
Number of positions	64
Length	77 mm

Width	135 mm
Height	62.5 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Standards/regulations	DIN VDE 0110

#### Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M 3
Connection 2	IEC 603/DIN 41612 connection
Type of connection	Pluggable

#### Certificates / Approvals

#### Approval logo



#### requested approbations

Certification	GOST
---------------	------

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2008 Phoenix Contact  
Technical modifications reserved;