


UMK- EC56/56-XOR

Order No.: 2975900

The illustration shows version UMK- EC56/56-XUL

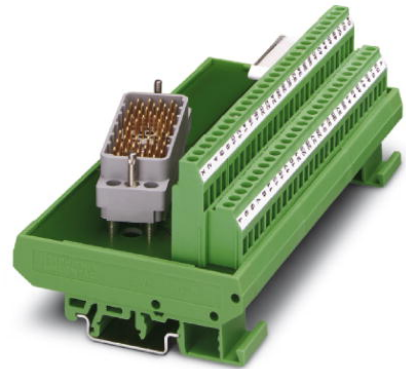

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2975900>

VARIOFACE module, for ELCO plug connector, for mounting on NS 35/7.5 or NS 32, with pin strip 8016 right, no. of positions 56



Commercial data

EAN	4017918089191
Pack	1 Pcs.
Customs tariff	85369010
Weight/Piece	0.3567 KG
Catalog page information	Page 257 (IF-2007)

Product notes

WEEE/RoHS-compliant since:
07/17/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Nominal voltage U_N	50 V AC/DC
Max. current carrying capacity per branch	2 A
Number of positions	56
Length	77 mm

Width	157.5 mm
Height	58.5 mm
Ambient temperature (operation)	-20 °C ... 40 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Test voltage	800 V (50 Hz, 1 min)
Mounting position	Any
Standards/regulations	EN 50020 DIN VDE 0110
Pollution degree	2
Surge voltage category	II

Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M 3
Connection 2	ELCO connection
Type of connection	Pluggable

Certificates / Approvals

Approval logo




requested approbations

Certification	GOST
---------------	------

Drawings

Dimensioned drawing

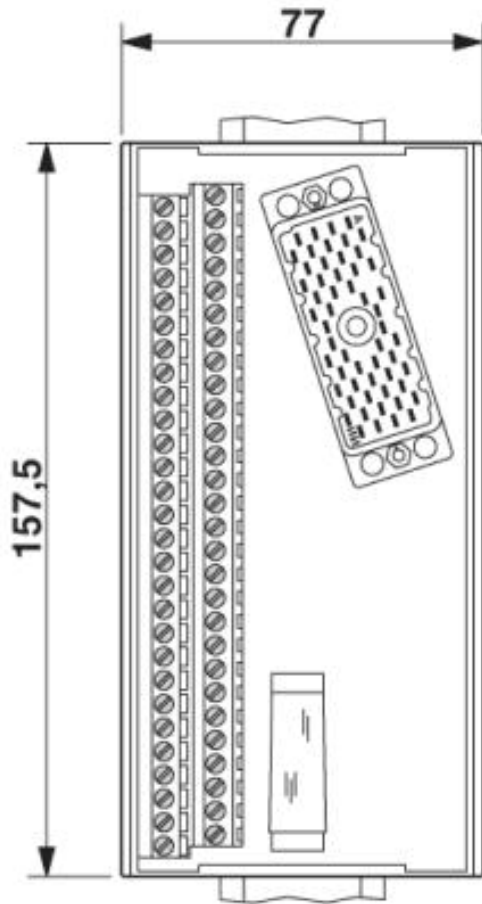

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2008 Phoenix Contact
Technical modifications reserved;