


# SAK 4


Terminal Type	Catalog No.	Standard Pack
<b>SAK 4</b> High-grade Melamine	<b>1283.2</b>	100
<b>SAK 4</b> Polyamid 6.6	<b>1283.6</b>	100

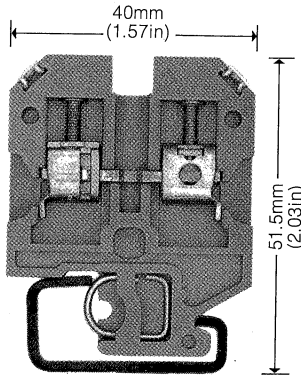

Terminal thickness 6.5mm-0.2mm (0.256in)  
Insulation Stripping Length 12mm (0.47in)

# KB 4/10

Terminal Type	Catalog No.	Standard Pack
<b>KB 4/10</b> 10-Pole Block without Marking Tags — Polyamid 6.6	<b>3088.6</b>	10
<b>KB 4/10</b> 10-Pole Block with Marking Tags 1-9 — Polyamid 6.6	<b>3226.6</b>	10

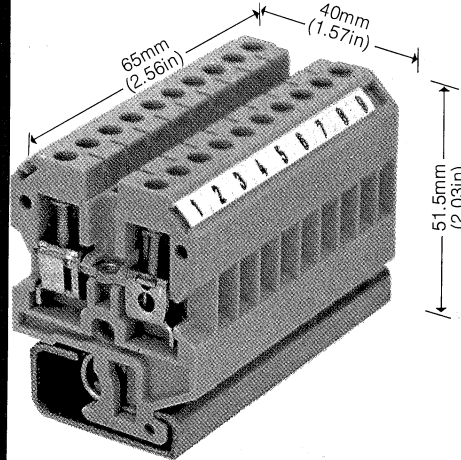


Terminal thickness 65mm (2.560in)  
Insulation Stripping Length 12mm (0.47in)

# DK 4/750

Terminal Type	Catalog No.	Standard Pack
<b>DK 4/750</b> Separate upper and lower connections. Complete with barrier. Polyamid 6.6	<b>5239.6</b>	60

(Barrier permanently affixed to terminal.)

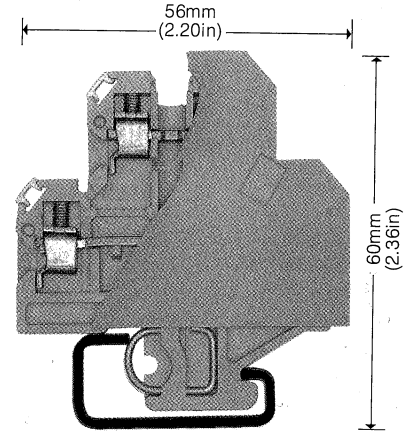

Terminal thickness 7.5mm (0.295in)  
Insulation Stripping Length 9mm (0.354in)

Approvals    Amps    Volts    AWG

	<b>36</b>	<b>600</b>	<b>22-12</b>
	<b>36</b>	<b>600</b>	<b>22-10</b>

Type    Catalog No.    Standard Pack

Required Accessories		
<b>TS 32</b>	<b>1228.0</b>	—
<b>EWK 1</b> 9mm (0.354in)	<b>2061.6</b>	50
<b>AP</b> 1.5mm (0.059in)	<b>1179.6</b>	20
<b>AP</b> 1.5mm (0.059in)	<b>1179.2</b>	20
Optional Accessories		
<b>TW</b> 1.5mm (0.059in)	<b>1301.6</b>	50
<b>TW</b> 2.5mm (0.098in)	<b>1301.2</b>	20
<b>TW</b>	<b>1971.0</b>	—
<b>TSch 1</b>	<b>3191.6</b>	100
<b>StB 14</b>	<b>1686.0</b>	50
<b>PS</b> 2.3mm $\phi$ (0.090in)	<b>1804.0</b>	50
<b>QS 2</b>	<b>2127.0</b>	20
<b>Q 2</b>	<b>3367.0</b>	50
<b>Q 3</b>	<b>3368.0</b>	50
<b>Q 4</b>	<b>3369.0</b>	20
<b>Q 10</b>	<b>3688.0</b>	20
<b>QL,VH,BS</b>	See Page 22	
<b>VL 2</b>	<b>1970.0</b>	100
<b>VH 19</b>	<b>2851.0</b>	50
<b>BS</b> M3x25	<b>2925.0</b>	100
<b>AD 4</b> (4 Terminals)	<b>3761.0</b>	10
<b>BSK</b> M3x22	<b>1289.0</b>	100
<b>Dekafix 6.5mm, etc.</b>	See Section G	
<b>SS Fixing Washer</b>	<b>1644.0</b>	—

For dimensions and further details see Accessory Section (H)

Approvals    Amps    Volts    AWG

	<b>36</b>	<b>600</b>	<b>22-12</b>
		<b>600</b>	<b>22-10</b>

Type    Catalog No.    Standard Pack

Required Accessories		
<b>TS 32</b>	<b>1228.0</b>	—
<b>EWK 1</b> 9mm (0.354in)	<b>2061.6</b>	50
<b>AP</b> 1.5mm (0.059in)	<b>1179.6</b>	20
Optional Accessories		
<b>TSch 1</b>	<b>3191.6</b>	100
<b>StB 14</b>	<b>1686.0</b>	50
<b>PS</b> 2.3mm $\phi$ (0.090in)	<b>1804.0</b>	50
<b>Q 2</b>	<b>3367.0</b>	50
<b>Q 3</b>	<b>3368.0</b>	50
<b>Q 4</b>	<b>3369.0</b>	20
<b>Q 10</b>	<b>3688.0</b>	20
<b>QL,VH,BS</b>	See Page 22	
<b>VL 2</b>	<b>1970.0</b>	100
<b>VH 19</b>	<b>2851.0</b>	50
<b>BS</b> M3x25	<b>2925.0</b>	100
<b>AD 4</b> (4 Terminals)	<b>3761.0</b>	10
<b>BSK</b> M3x22	<b>1289.0</b>	100
<b>Dekafix 6.5mm, etc.</b>	See Section G	
<b>SS Fixing Washer</b>	<b>1644.0</b>	—

Approvals    Amps    Volts    AWG

	<b>27</b>	<b>600</b>	<b>22-16</b>
	<b>25</b>	<b>600</b>	<b>22-12</b>

Type    Catalog No.    Standard Pack

Required Accessories		
<b>TS 32</b>	<b>1228.0</b>	—
<b>EWK 1</b> 9mm (0.354in)	<b>2061.6</b>	50
Optional Accessories		
<b>StB 8.5</b>	<b>2157.0</b>	50
<b>PS</b> 2.3mm $\phi$ (0.090in)	<b>1804.0</b>	50
<b>QL,VH,BS</b>	See Page 22	
<b>VH 8.5</b>	<b>2669.0</b>	
<b>BS</b> 2.5x14	<b>3677.0</b>	
<b>Dekafix 6.5mm, etc.</b>	See Section G	



