
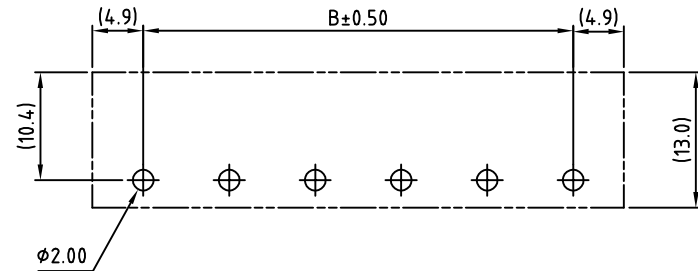
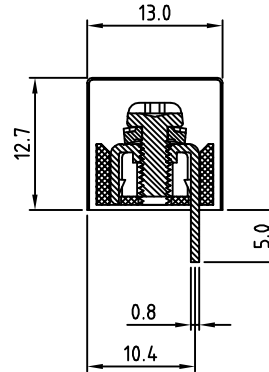
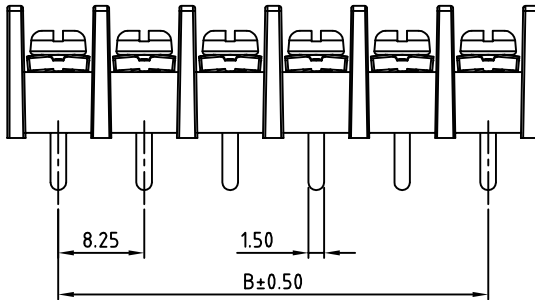


SIGN	DATE	DESCRIPTION	APPROVER
<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>			

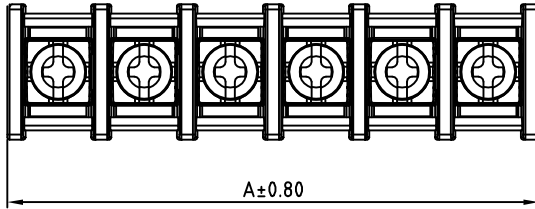

RECOMMENDED PCB LAYOUT

**SPECIFICATIONS**

- VOLTAGE & CURRENT: 300V, 20A  
 WITHSTANDING VOLTAGE: AC 2000 V/Min  
 INSULATION RESISTANCE: 1000 MΩ or MORE AT DC 500 V  
 TEMPERATURE RANGE: -40 °C ~ +105 °C  
 SCREW TORQUE VALUE: 8.8 Lb-in.  
 WIRE RANGE: 22 - 12 AWG  
 1) MOLDED PARTS: POLYIMIDE 66, UL 94 V-0 BLACK  
 2) TERMINAL: BRASS, 0.8t, Tin PLATED  
 3) TERMINAL SCREWS: STEEL, Ni PLATED, M3  
 APPROVAL: US

RoHS Compliant

PART NUMBER:

**OSTYK421XX030**

- No. of Poles  
 02: 2 Poles  
 03: 3 Poles  
 04: 4 Poles  
 ⋮  
 30: 30 Poles

POLE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A	17.50	25.75	34.00	42.25	50.50	58.75	67.00	75.25	83.50	91.75	100.00	108.25	116.50	124.75	133.00	
B	8.25	16.50	24.75	33.00	41.25	49.50	57.75	66.00	74.25	82.50	90.75	99.00	107.25	115.50	123.75	
POLE	17	18	19	20												
A	141.25	149.50	157.75	166.00												
B	132.00	140.25	148.50	156.75												

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		OSTYK-421 W/O Flange Series (width of contact is 1.50mm), 8.25mm spacing, low profile					
PART NO.	OSTYK421XX030			DWG NO.	OSTYK421XX030.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			
Shi Jun 2006.11.07	Seamus 2006.11.06	Steady 2006.10.20	Steady 2006.10.20		UNIT: mm	Tolerance	
				SHEET: 01/01	SCALE: NONE	X.X	±0.50
					REV: C	X.XX	±0.30
						X°	±0.10
							±1°