

## UK 6-FSI/C

Order No.: 3118203



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3118203>

Flat-type fuse terminal block, cross section: 0.2 - 6 mm, AWG: 26 - 8,  
width: 8.2 mm, color: black

### Commercial data

EAN	4017918100605
Pack	50 Pcs.
Customs tariff	85369010
Weight/Piece	0.020767 KG
Catalog page information	Page 311 (CL-2007)

### Product notes

WEEE/RoHS-compliant since:  
01/01/2003



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General

Number of levels	1
Number of connections	2
Color	black
Insulating material	PA
Inflammability class acc. to UL 94	V0

**Dimensions**

Width	8.2 mm
Length	64 mm
Height NS 35/7,5	52 mm
Height NS 35/15	59.5 mm
Height NS 32	57 mm

**Technical data**

Fuse	C
Fuse type	Flat
Rated surge voltage	4 kV
Pollution degree	3
Surge voltage category	III
Insulating material group	I
Nominal voltage $U_N$	250 V
Maximum current with single arrangement	30 A (special arrangements on request)

**Connection data**

Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	10 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	6 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	8
Conductor cross section stranded, with ferrule without plastic sleeve min.	0.25 mm <sup>2</sup>
Conductor cross section stranded, with ferrule without plastic sleeve max.	6 mm <sup>2</sup>
Conductor cross section stranded, with ferrule with plastic sleeve min.	0.25 mm <sup>2</sup>
Conductor cross section stranded, with ferrule with plastic sleeve max.	4 mm <sup>2</sup>
2 conductors with same cross section, solid min.	0.2 mm <sup>2</sup>
2 conductors with same cross section, solid max.	2.5 mm <sup>2</sup>
2 conductors with same cross section, stranded min.	0.2 mm <sup>2</sup>
2 conductors with same cross section, stranded max.	2.5 mm <sup>2</sup>

2 conductors with same cross section, stranded, ferrules without plastic sleeve, min.	0.25 mm <sup>2</sup>
2 conductors with same cross section, stranded, ferrules without plastic sleeve, max.	2.5 mm <sup>2</sup>
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min.	0.5 mm <sup>2</sup>
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	4 mm <sup>2</sup>
Type of connection	Screw connection
Stripping length	10 mm
Internal cylindrical gage	A5
Screw thread	M 4
Tightening torque, min	1.5 Nm
Tightening torque max	1.6 Nm

### Certificates / Approvals

#### Approval logo



#### CSA

Nominal voltage U <sub>N</sub>	32 V
Nominal current I <sub>N</sub>	30 A
AWG/kcmil	26-8

#### CUL

Nominal voltage U <sub>N</sub>	300 V
Nominal current I <sub>N</sub>	30 A
AWG/kcmil	26-8

#### UL

Nominal voltage U <sub>N</sub>	300 V
Nominal current I <sub>N</sub>	30 A
AWG/kcmil	26-8
Certification	CSA, CUL, UL

<b>Accessories</b>		
Item	Designation	Description
<b>Assembly</b>		
3022218	CLIPFIX 35	Snap-on end bracket, for 35 mm NS 35/7.5 or NS 35/15 mounting rail, can be fitted with Zack strip ZB 8 and ZB 8/27, terminal strip marker KLM 2 and KLM, width: 9.5 mm, color: gray
1201442	E/UK	End clamp, for supporting the electronic base. If mounted vertically, 2 end clamps are required in each case
1201028	NS 32 AL UNPERF 2000MM	G rail 32 mm (NS 32)
1201280	NS 32 CU/120QMM UNPERF 2000MM	G-profile DIN rail, deep-drawn, material: Copper, unperforated, height 15 mm, width 32 mm, length 2 m
1201358	NS 32 CU/35QMM UNPERF 2000MM	G-profile DIN rail, material: Copper, unperforated, height 15 mm, width 32 mm, length 2 m
1201002	NS 32 PERF 2000MM	G-profile DIN rail, material: Steel, perforated, height 15 mm, width 32 mm, length 2 m
1201015	NS 32 UNPERF 2000MM	G-profile DIN rail, material: Steel, unperforated, height 15 mm, width 32 mm, length 2 m
0801762	NS 35/ 7,5 CU UNPERF 2000MM	DIN rail, material: Copper, unperforated, height 7.5 mm, width 35 mm, length: 2 m
0801733	NS 35/ 7,5 PERF 2000MM	DIN rail, material: Steel, perforated, height 7.5 mm, width 35 mm, length: 2 m
0801681	NS 35/ 7,5 UNPERF 2000MM	DIN rail, material: Steel, unperforated, height 7.5 mm, width 35 mm, length: 2 m
1201756	NS 35/15 AL UNPERF 2000MM	DIN rail, deep-drawn, high profile, unperforated, 1.5 mm thick, material: Aluminum, height 15 mm, width 35 mm, length 2 m
1201895	NS 35/15 CU UNPERF 2000MM	DIN rail, material: Copper, unperforated, 1.5 mm thick, height 15 mm, width 35 mm, length: 2 m
1201730	NS 35/15 PERF 2000MM	DIN rail, material: Steel, perforated, height 15 mm, width 35 mm, length: 2 m
1201714	NS 35/15 UNPERF 2000MM	DIN rail, material: Steel, unperforated, height 15 mm, width 35 mm, length: 2 m
1201798	NS 35/15-2,3 UNPERF 2000MM	DIN rail, material: Steel, unperforated, 2.3 mm thick, height 15 mm, width 35 mm, length: 2 m
2770215	TS-KK 3	Separating plate, for electrical separation of neighboring bridges, can be fitted later, no loss of pitch, color: Gray
<b>Bridges</b>		
0202154	EB 2- 8	Insertion bridge, 2-pos., fully insulated
0202141	EB 3- 8	Insertion bridge, 3-pos., fully insulated
0202138	EB 10- 8	Insertion bridge, 10-pos., divisible, fully insulated

0200020	FBI 2- 8	Fixed bridge, for cross connections, with screws, screw heads without insulation, 2-pos.
0200059	FBI 3- 8	Fixed bridge, for cross connections, with screws, screw heads without insulation, 3-pos.
0200046	FBI 4- 8	Fixed bridge, for cross connections, with screws, screw heads without insulation, 4-pos.
0203263	FBI 10- 8	Fixed bridge, 10-pos., screw heads with insulating collar, divisible, with screws
0301534	ISSBI 10- 8	Isolator bridge bar, 10-position, divisible, with screws, for switchable branches

**Marking**

1007235	SBS 8:UNBEDRUCKT	Marker cards for modular terminal blocks, color: white
1050512	ZB 8:SO/CMS	Zack strip, 10-section, divisible, special printing, marking according to customer requirements

**Additional products**


Item	Designation	Description
<b>Fuse</b>		
0913689	SI FORM C 2 A	Flat-type fuse insert (max. 32 V), nominal current 2 A, color: gray, not included in the ISO/DIS 8820/DIN 72581-3
0913773	SI FORM C 3 A DIN 72581	Flat-type fuse insert (max. 32 V), nominal current 3 A, DIN 72581, color: violet
0913731	SI FORM C 4 A DIN 72581	Flat-type fuse insert (max. 32 V), nominal current 4 A, DIN 72581, color: pink
0913692	SI FORM C 5 A DIN 72581	Flat-type fuse insert (max. 32 V), nominal current 5 A, DIN 72581, color: light brown
0913715	SI FORM C 10 A DIN 72581	Flat-type fuse insert (max. 32 V), nominal current 10 A, DIN 72581, color: red
0913676	SI FORM C 15 A DIN 72581	Flat-type fuse insert (max. 32 V), nominal current 15 A, DIN 72581, color: light blue
0913744	SI FORM C 20 A DIN 72581	Flat-type fuse insert (max. 32 V), nominal current 20 A, DIN 72581, color: yellow
0913757	SI FORM C 25 A DIN 72581	Flat-type fuse insert (max. 32 V), nominal current 25 A, DIN 72581, color: white
0913760	SI FORM C 30 A DIN 72581	Flat-type fuse inserts (max. 32 V), nominal current 30 A, DIN 72581, color: light green
0913702	SI FORM C 7,5 A DIN 72581	Flat-type fuse inserts (max. 32 V), nominal current 7.5 A, color: brown

## Drawings


### Diagram

Derating curve UK 6-FSI/C (single arrangement)

- ① = Fuse insert 10 A
- ② = Fuse insert 20 A
- ③ = Fuse insert 30 A

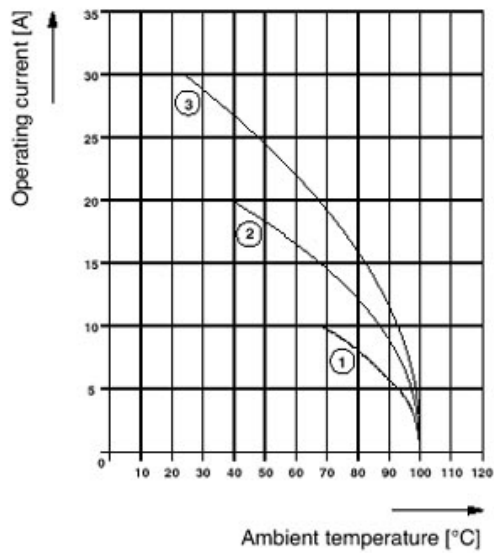

Circuit diagram

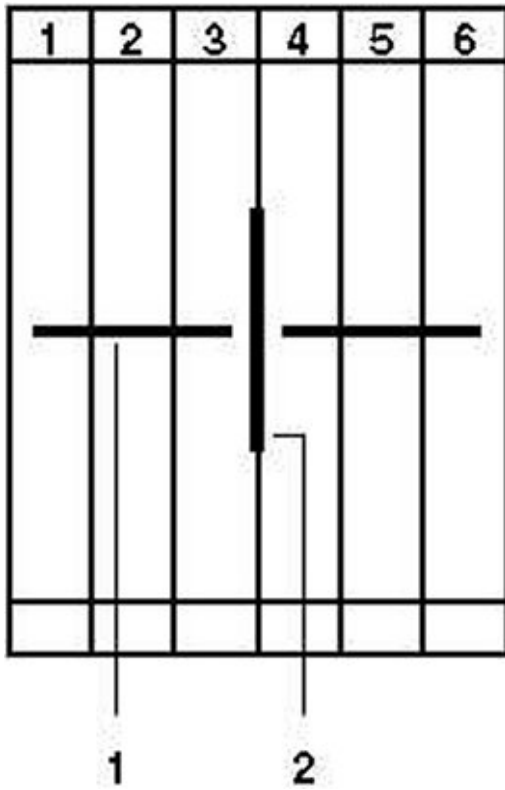

1 = fixed bridge  
2 = separating plate

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2008 Phoenix Contact  
Technical modifications reserved;