


# TERMINAL BLOCKS

SRSL 35-T35



tightening torque/thread    5.0 Nm/M 6    Inspection Test Pattern Size    B 8


Type    Cat.-No.    Qty.p.pck.  
**SRSL 35-T35**    41199.2    green/yellow    20

**Ratings:**

**Dimensions**    TS 35  
 LxBxH (mm)    58x16x71  
 Stripped Length    20 mm

**Max Rated Cross Section**  
 Single Wire (solid)    2.5-50 mm<sup>2</sup>  
 Stranded Wire (flexible)    2.5-35 mm<sup>2</sup>  
 Wire Size    AWG 12-2

SRSL 2.5-T35 DRL

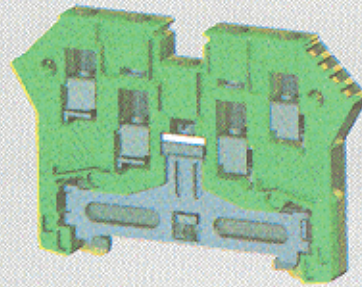

tightening torque/thread    0.7 Nm/M 2.5    Inspection Test Pattern Size    A 3


Type    Cat.-No.    Qty.p.pck.  
**SRSL 2.5-T35 DRL**    41062.2    green/yellow    100

**Ratings:**

**Dimensions**    TS 35  
 LxBxH (mm)    67x6x47  
 Stripped Length    10 mm

**Max Rated Cross Section**  
 Single Wire (solid)    0.2-4 mm<sup>2</sup>  
 Stranded Wire (flexible)    0.2-2.5 mm<sup>2</sup>  
 Wire Size    AWG 22-14

SRSL 2.5-T35 DR

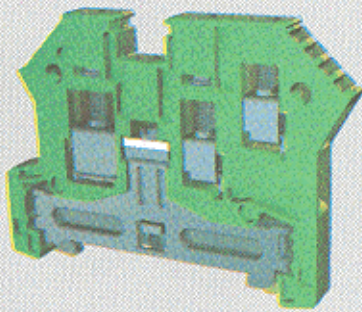

tightening torque/thread    0.7 Nm/M 2.5    Inspection Test Pattern Size    A 3

Type    Cat.-No.    Qty.p.pck.  
**SRSL 2.5-T35 DR**    41060.2    green/yellow    100

**Ratings:**

**Dimensions**    TS 35  
 LxBxH (mm)    62.5x6x47  
 Stripped Length    10 mm

**Max Rated Cross Section**  
 Single Wire (solid)    0.2-4 mm<sup>2</sup>  
 Stranded Wire (flexible)    0.2-2.5 mm<sup>2</sup>  
 Wire Size    AWG 22-14