

## FRONT-MSTB 2,5/ 9-STF

Order No.: 1779712

The figure shows a 10-position version of the product

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1779712>

Plug with screw flange, nominal current: 12 A, rated voltage: 250 V, pitch: 5,0 mm, no. of positions: 9, type of connection: Screw connection

### Commercial data

EAN	4017918040406
Pack	50 Pcs.
Customs tariff	85366990
Weight/Piece	0.02763 KG
Catalog page information	Page 181 (CC-2007)

### Product notes

WEEE/RoHS-compliant since:  
01/25/2005



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### Dimensions / positions

Pitch	5 mm
Dimension a	40 mm
Number of positions	9
Screw thread	M 2,5

Tightening torque, min	0.5 Nm
------------------------	--------

**Technical data**

Insulating material group	I
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/2)	320 V
Rated voltage (II/2)	630 V
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	12 A
Nominal voltage $U_N$	250 V
Nominal cross section	2.5 mm <sup>2</sup>
Maximum load current	12 A
Insulating material	PA
Inflammability class acc. to UL 94	V0
Internal cylindrical gage	A3
Stripping length	10 mm

**Connection data**

Conductor cross section solid min.	0.34 mm <sup>2</sup>
Conductor cross section solid max.	2.5 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section stranded, with ferrule without plastic sleeve min.	0.25 mm <sup>2</sup>
Conductor cross section stranded, with ferrule without plastic sleeve max.	2.5 mm <sup>2</sup>
Conductor cross section stranded, with ferrule with plastic sleeve min.	0.25 mm <sup>2</sup>
Conductor cross section stranded, with ferrule with plastic sleeve max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
2 conductors with same cross section, solid min.	0.2 mm <sup>2</sup>
2 conductors with same cross section, solid max.	1 mm <sup>2</sup>
2 conductors with same cross section, stranded min.	0.2 mm <sup>2</sup>

2 conductors with same cross section, stranded max.	1.5 mm <sup>2</sup>
2 conductors with same cross section, stranded, ferrules without plastic sleeve, min.	0.25 mm <sup>2</sup>
2 conductors with same cross section, stranded, ferrules without plastic sleeve, max.	1 mm <sup>2</sup>
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min.	0.5 mm <sup>2</sup>
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	1.5 mm <sup>2</sup>

**Certificates / Approvals**



**CSA**

Nominal voltage U <sub>N</sub>	300 V
Nominal current I <sub>N</sub>	10 A
AWG/kcmil	22-12

**CUL**

Nominal voltage U <sub>N</sub>	300 V
Nominal current I <sub>N</sub>	10 A
AWG/kcmil	30-12

**UL**

Nominal voltage U <sub>N</sub>	300 V
Nominal current I <sub>N</sub>	10 A
AWG/kcmil	30-12
Certification	CB, CSA, CUL, GL, GOST, UL, VDE-PZI

**Accessories**

Item	Designation	Description
<b>Assembly</b>		
1763058	FRONT-MSTB-EW	Removal aid, for FRONT-MSTB, facilitates extraction of several plugs mounted behind each other

**Bridges**

2303145	EBL 2- 5	Insertion bridge, 2-pos., fully insulated
2303132	EBL 10- 5	Insertion bridge, 10-pos., divisible, fully insulated

**Marking**

0804183	SK 5/3,8:FORTL.ZAHLEN	Marker card, printed horizontally, self-adhesive, 12 identical decades marked 1-10, 11-20 etc. up to 91-(99)100, sufficient for 120 terminal blocks
---------	-----------------------	---

**Plug/Adapter**

1734634	CP-MSTB	Coding profile, is inserted into the slot on the plug or inverted header, red insulating material
---------	---------	---

**Tools**


1205053	SZS 0,6X3,5	Screwdriver, bladed, matches all screw terminal blocks up to 4.0 mm <sup>2</sup> connection cross section, blade: 0.6 x 3.5 mm, without VDE approval
---------	-------------	--

**Additional products**

Item	Designation	Description
<b>General</b>		
0710099	DFK-MSTB 2,5/ 9-GF	Header, nominal current: 12 A, rated voltage: 320 V, pitch: 5.0 mm, no. of positions: 9, mounting: Direct mounting
1900141	EMSTB 2,5/ 9-GF	Header, nominal current: 12 A, rated voltage: 250 V, pitch: 5.0 mm, no. of positions: 9, mounting: Press in
1915136	EMSTBV 2,5/ 9-GF	Header, nominal current: 12 A, rated voltage: 200 V, pitch: 5.0 mm, no. of positions: 9, mounting: press in
1846768	MDSTB 2,5/ 9-GF	Header, nominal current: 10 A, rated voltage: 250 V, pitch: 5.0 mm, no. of positions: 9, mounting: Soldering
1846153	MDSTBV 2,5/ 9-GF	Header, nominal current: 10 A, rated voltage: 250 V, pitch: 5.0 mm, no. of positions: 9, mounting: Soldering
1776760	MSTB 2,5/ 9-GF	Header, nominal current: 12 A, rated voltage: 250 V, pitch: 5.0 mm, no. of positions: 9, mounting: Soldering
1776951	MSTBV 2,5/ 9-GF	Header, nominal current: 12 A, rated voltage: 250 V, pitch: 5.0 mm, no. of positions: 9, mounting: Soldering

## Drawings

Dimensioned drawing

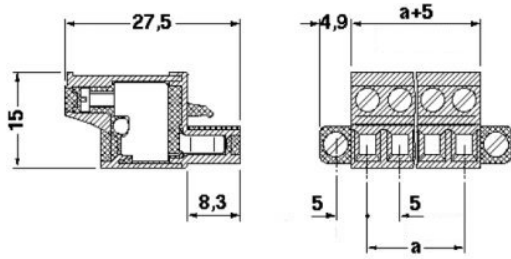

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2008 Phoenix Contact  
Technical modifications reserved;