

MC 1,5/ 4-G-3,81

Order No.: 1803293

The figure shows a 10-position version of the product

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1803293>Header, nominal current: 8 A, rated voltage: 160 V, pitch: 3.81 mm, no.
of positions: 4, mounting: Soldering

Commercial data

| | |
|--------------------------|--------------------|
| EAN | 4017918045609 |
| Pack | 50 Pcs. |
| Customs tariff | 85369010 |
| Weight/Piece | 0.001244 KG |
| Catalog page information | Page 152 (CC-2007) |

Product notes

WEEE/RoHS-compliant since:
01/01/2003

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions

| | |
|---------------------|--------------|
| Height | 7.7 mm |
| Pitch | 3.81 mm |
| Dimension a | 11.43 mm |
| Number of positions | 4 |
| Pin dimensions | 0,8 x 0,8 mm |

| | |
|------------------------------------|--------|
| Hole diameter | 1.2 mm |
| Technical data | |
| Insulating material group | IIIa |
| Rated surge voltage (III/3) | 2.5 kV |
| Rated surge voltage (III/2) | 2.5 kV |
| Rated surge voltage (II/2) | 2.5 kV |
| Rated voltage (III/2) | 160 V |
| Rated voltage (II/2) | 250 V |
| Connection in acc. with standard | EN-VDE |
| Nominal current I_N | 8 A |
| Nominal voltage U_N | 160 V |
| Maximum load current | 8 A |
| Insulating material | PBT |
| Inflammability class acc. to UL 94 | V0 |

Certificates / Approvals



CSA

| | |
|-----------------------|-------|
| Nominal voltage U_N | 300 V |
| Nominal current I_N | 8 A |

CUL

| | |
|-----------------------|-------|
| Nominal voltage U_N | 300 V |
| Nominal current I_N | 8 A |

UL

| | |
|-----------------------|---------------------------------|
| Nominal voltage U_N | 300 V |
| Nominal current I_N | 8 A |
| Certification | CB, CSA, CUL, GOST, UL, VDE-PZI |


| Accessories | | |
|---------------------|--------------------------|--|
| Item | Designation | Description |
| General | | |
| 1841174 | MC 1,5/10-LWL 1,5-3,81 | MINI-COMBICON optical fibers, pitch 3.81 mm, 10-position, divisible, are snapped into the back of the MC header, color: transparent, dimension a: 1.5 mm |
| 1841190 | MC 1,5/10-LWL 2,3-3,81 | MINI-COMBICON optical fibers, pitch 3.81 mm, 10-position, divisible, are snapped into the back of the MC header, color: transparent, dimension a: 2.3 mm |
| 1841213 | MC 1,5/10-LWL 4-3,81 | MINI-COMBICON optical fibers, pitch 3.81 mm, 10-position, divisible, are snapped into the back of the MC header, color: transparent, dimension a: 4.0 mm |
| Marking | | |
| 1051993 | B-STIFT | Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm |
| 0804109 | SK 3,81/2,8:FORTL.ZAHLEN | Marker card, printed horizontally, self-adhesive, 10-section marker strip, 14 identical decades marked 1-10, 11-20 etc. up to 91-(99)100, sufficient for 140 terminal blocks |
| 0805056 | SK 3,81/2,8:SO | Marker card, special printing, self-adhesive, labeled acc. to customer requirements, 14 identical marker strips per card, max. 25-position labeling per strip, color: White |
| Plug/Adapter | | |
| 1734634 | CP-MSTB | Coding profile, is inserted into the slot on the plug or inverted header, red insulating material |

| Additional products | | |
|---------------------|-------------------------|---|
| Item | Designation | Description |
| General | | |
| 1851067 | FK-MCP 1,5/ 4-ST-3,81 | Plug component, nominal current: 8 A, rated voltage: 160 V, pitch: 3.81 mm, no. of positions: 4, type of connection: Spring-cage connection |
| 1850686 | FRONT-MC 1,5/ 4-ST-3,81 | Plug component, nominal current: 8 A, rated voltage: 160 V, pitch: 3.81 mm, no. of positions: 4, type of connection: Screw connection |
| 1862593 | IMC 1,5/ 4-G-3,81 | Header, nominal current: 8 A, rated voltage: 160 V, pitch: 3.81 mm, no. of positions: 4, mounting: Soldering |
| 1875441 | IMCV 1,5/ 4-G-3,81 | Header, nominal current: 8 A, rated voltage: 160 V, pitch: 3.81 mm, no. of positions: 4, mounting: Soldering |
| 1803594 | MC 1,5/ 4-ST-3,81 | Plug component, nominal current: 8 A, rated voltage: 160 V, pitch: 3.81 mm, no. of positions: 4, type of connection: Screw connection |


| | | |
|---------|---------------------|---|
| 1852192 | MCC 1/ 4-STZ-3,81 | Plug component, nominal current: 8 A, rated voltage: 160 V, pitch: 3.81 mm, no. of positions: 4, type of connection: Crimp connection |
| 1827143 | MCVR 1,5/ 4-ST-3,81 | Plug component, nominal current: 8 A, rated voltage: 160 V, pitch: 3.81 mm, no. of positions: 4, type of connection: Screw connection |
| 1826995 | MCVW 1,5/ 4-ST-3,81 | Plug component, nominal current: 8 A, rated voltage: 160 V, pitch: 3.81 mm, no. of positions: 4, type of connection: Screw connection |
| 1897416 | QC 0,5/ 4-ST-3,81 | Plug, nominal current: 6 A, rated voltage: 320 V, pitch: 3.81 mm, number of positions: 4, connection method: Insulation displacement connection QUICKON |

Drawings

Drilling diagram

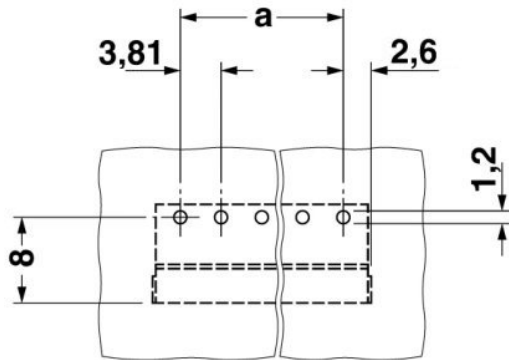

Dimensioned drawing

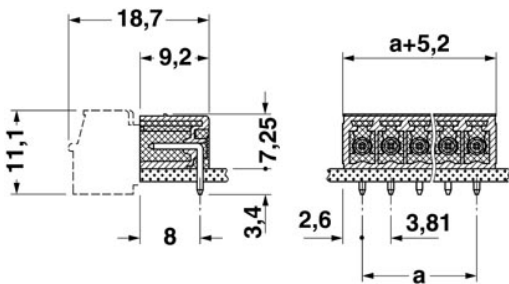

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2008 Phoenix Contact
Technical modifications reserved;