

## PST 1,0/ 4-3,5

Order No.: 1945119

The figure shows a 10-position version of the product

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1945119>

Pin strip, 3.5 mm pitch, color: Black

Commercial data	
EAN	4017918883287
Pack	50 Pcs.
Customs tariff	85366990
Weight/Piece	0.000476 KG
Catalog page information	Page 426 (CC-2007)

**Product notes**WEEE/RoHS-compliant since:  
01/01/2003

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data**

Dimensions / positions	
Pitch	3.5 mm
Dimension a	10.5 mm
Number of positions	4
Pin dimensions	1 mm
Hole diameter	1.2 mm

**Technical data**

Insulating material group	IIIa
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/2)	250 V
Rated voltage (II/2)	250 V
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	8 A (depends on the plug used)
Nominal voltage $U_N$	160 V
Maximum load current	8 A (depends on the plug used)
Insulating material	PA
Inflammability class acc. to UL 94	V0

**Certificates / Approvals****CUL**


Nominal voltage $U_N$	300 V
Nominal current $I_N$	10 A

**UL**


Nominal voltage $U_N$	300 V
Nominal current $I_N$	10 A
Certification	CCA, CUL, GOST, SEV, UL

## Drawings

### Drilling diagram

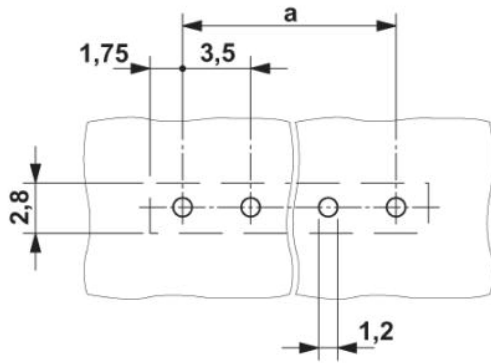

### Dimensioned drawing

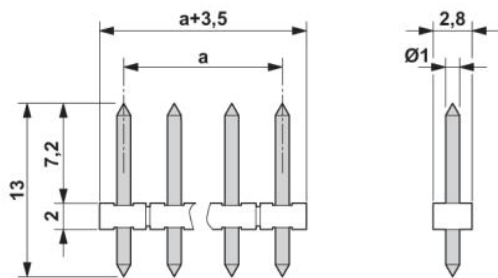

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2008 Phoenix Contact  
Technical modifications reserved;